



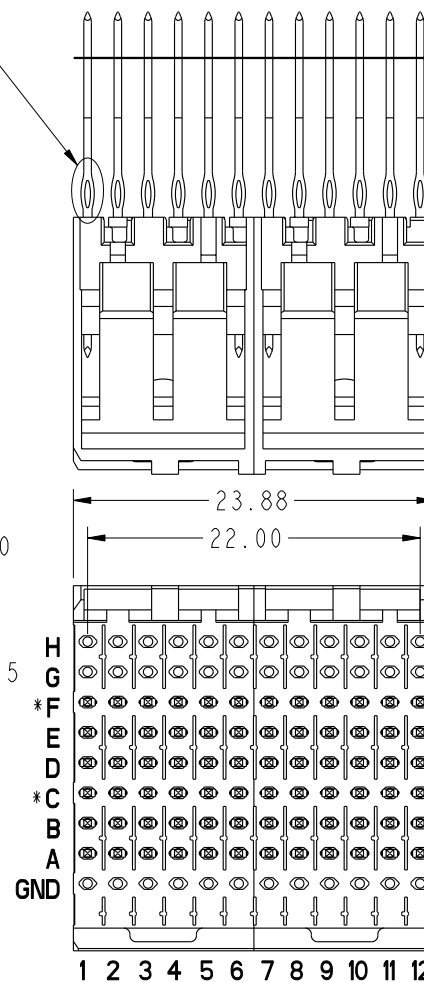


PRODUCT NUMBER	CONTACT AREA PLATING MEETS:
84965-102ZZZ	TELCORDIA CO
84965-102ZZZLF	TELCORDIA CO
84965-302ZZZ	CUSTOMER SPECIAL
84965-302ZZZLF	CUSTOMER SPECIAL
84965-502ZZZ	TELCORDIA UE
84965-502ZZZLF	TELCORDIA UE
84965-902ZZZ	TELCORDIA CO
84965-902ZZZLF	TELCORDIA CO

EYE OF NEEDLE PRESS FIT SECTION
BABY-H PRESS FIT SECTION

DETAIL A
SCALE 4:1
SEE NOTE 14

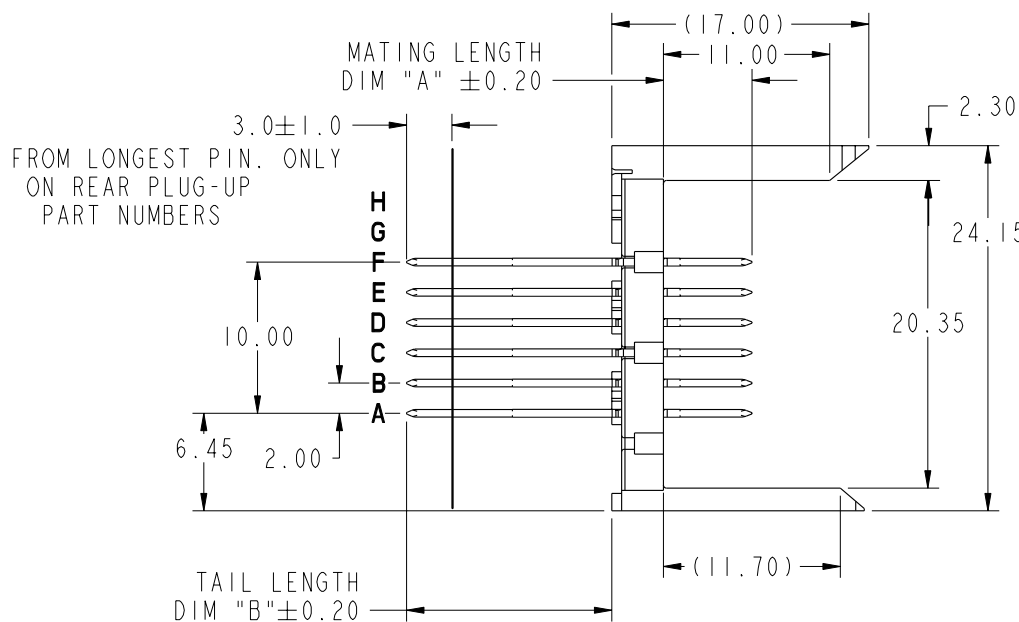

mat'l code SEE NOTE 3				tolerances unless otherwise specified			CUSTOMER		FCi www.fciconnect.com		
ltr	ecr no.	dr	date	linear	0.X ±0.3		projection 	COPY	title VERTICAL SIGNAL HDR 8 ROW P.F. 96 POS. SELECT LOAD EXT.	product family METRAL	code 213 sheet 1 of 5
L	V06-0569	DCH	2006-06-12		0.XX ±0.13						
M	V07-0170	DCH	2007-03-28		.XXX ±.051						
N	V08-0030	HTB	2008-01-22	angles	0° ±2°		MM 	scale 1:1	size A	dwg no 84965	
P	V08-0066	LP	2008-03-24	dr	E. KROPER.	2001-01-15					
-	-	-	-	enrg	J. VOLSTORF	2001-01-15					
J	V04-0397	DAI	2004-05-18	chr	J. VOLSTORF	2001-01-15					
K	V05-0955	LP	2005-11-09	appd	J. VOLSTORF	2001-01-15					
sheet index		revision sheet		P	P	P					
				1	2	3	4	5			




This document is the property of and embodies
CONFIDENTIAL and PROPRIETARY information of FCI.
No part of the information shown on this
document may be used in any way or disclosed
to others without the written consent of FCI.
Copyright FCI.

PIN NO.	DIM A MATING LENGTH	DIM B TAIL LENGTH	PCB THICKNESS RANGE ACCOMMODATED BY PIN'S TAIL LENGTH
			ROWS A,B,C,D,E,F,G&H
01*	5.00	4.30	1.60 MIN
54		11.55	1.60 - 3.15
22		12.20	2.95 - 3.80
30		12.95	2.95 - 4.55
05		13.70	2.95 - 5.30
35		14.45	3.05 - 6.05
48		15.20	3.80 - 6.80
40		15.70	4.30 - 7.30
65		16.40	5.00 - 8.00
09		17.10	5.70 - 8.70
02*	5.75	4.30	1.60 MIN
55		11.55	1.60 - 3.15
44		12.20	2.95 - 3.80
31		12.95	2.95 - 4.55
06		13.70	2.95 - 5.30
36		14.45	3.05 - 6.05
49		15.20	3.80 - 6.80
25		15.70	4.30 - 7.30
66		16.40	5.00 - 8.00
10		17.10	5.70 - 8.70
03*	6.50	4.30	1.60 MIN
56		11.55	1.60 - 3.15
45		12.20	2.95 - 3.80
32		12.95	2.95 - 4.55
07		13.70	2.95 - 5.30
37		14.45	3.05 - 6.05
50		15.20	3.80 - 6.80
41		15.70	4.30 - 7.30
24		16.40	5.00 - 8.00
11		17.10	5.70 - 8.70

* STUB PINS - NO REAR PLUG-UP


PIN NO.	DIM A MATING LENGTH	DIM B TAIL LENGTH	PCB THICKNESS RANGE ACCOMMODATED BY PIN'S TAIL LENGTH
			ROWS A,B,C,D,E,F,G&H
04*	7.25	4.30	1.60 MIN
57		11.55	1.60 - 3.15
46		12.20	2.95 - 3.80
33		12.95	2.95 - 4.55
08		13.70	2.95 - 5.30
38		14.45	3.05 - 6.05
51		15.20	3.80 - 6.80
42		15.70	4.30 - 7.30
67		16.40	5.00 - 8.00
12		17.10	5.70 - 8.70
19*	8.00	4.30	1.60 MIN
58		11.55	1.60 - 3.15
47		12.20	2.95 - 3.80
34		12.95	2.95 - 4.55
20		13.70	2.95 - 5.30
39		14.45	3.05 - 6.05
52		15.20	3.80 - 6.80
43		15.70	4.30 - 7.30
68		16.40	5.00 - 8.00
21		17.10	5.70 - 8.70

mat'l code SEE NOTE 3				tolerances unless otherwise specified			CUSTOMER		 www.fciconnect.com		
ltr	ecn no.	dr	date	linear	0.X ±0.3			projection 	title VERTICAL SIGNAL HDR 8 ROW P.F. 96 POS. SELECT LOAD EXT.		
P					0.XX ±0.13						
					.XXX ±.051						
				angles	0° ±2°			MM ←→ scale 1:1	product family METRAL		code 213
				dr	E. KROPER.	2001-01-15	A	size 84965	sheet 2 of 5		
				enrg	J. VOLSTORF	2001-01-15					
				chr	J. VOLSTORF	2001-01-15					
				appd	J. VOLSTORF	2001-01-15					
sheet index	revision sheet										




PRODUCT NUMBER

SEE SHEET 1




REAR PLUG-UP



STUB MOUNT

PRESS-FIT HOLES	OPTION 1
HOLE DIAMETER AFTER PLATING	Ø 0.65-0.80
DRILLED HOLE	Ø 0.81-0.86 (Ø 0.85 DRILL)
COPPER PLATING	0.025 MIN
SnPb PLATING	0.005-0.015

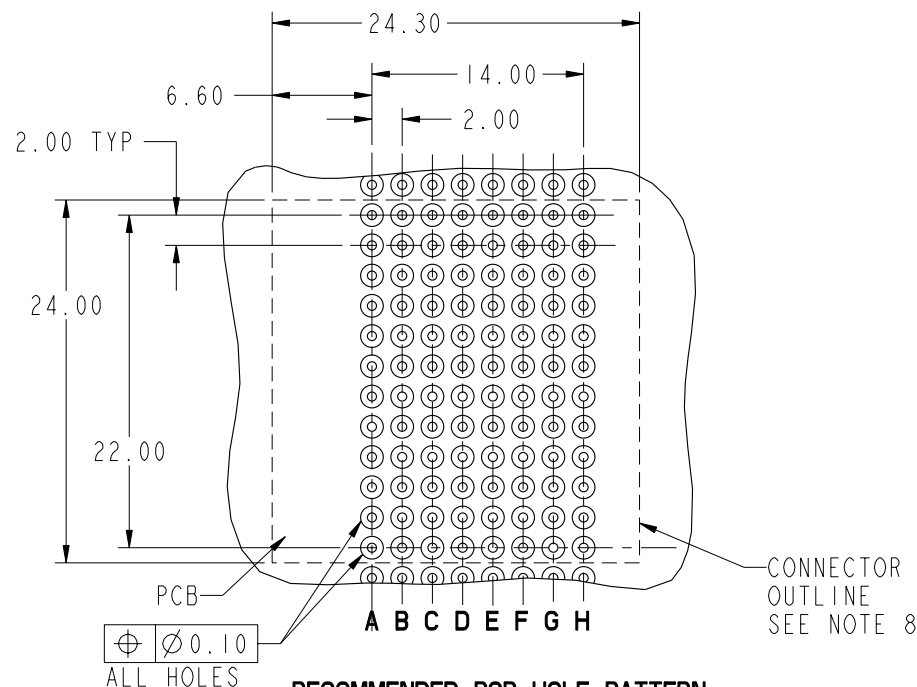

RECOMMENDED PCB HOLE PATTERN
(COMPONENT SIDE)
SEE PRINT 58351 FOR
ADDITIONAL PCB INFORMATION

mat'l code SEE NOTE 3				tolerances unless otherwise specified		CUSTOMER		FCI www.fciconnect.com	
ltr	ecr no.	dr	date	linear	0.X ± 0.3	projection	COPY	title	VERTICAL SIGNAL HDR 8 ROW P.F. 96 POS. SELECT LOAD EXT.
P					0.XX ± 0.13				
					.XXX ± .051				
				angles	0° ± 2°	MM scale 1:1	product family METRAL	code 213	sheet 3
				dr	E. KROPER. 2001-01-15				
				enr	J. VOLSTORF 2001-01-15				
				chr	J. VOLSTORF 2001-01-15	A	size 84965	sheet 3	
				appd	J. VOLSTORF 2001-01-15				
sheet index	revision sheet								

Pro/E

3

cage code 22526

4

PDM: Rev:P

STATUS: Released

Printed: May 13, 2011



A

SELECT LOAD PATTERNS													
PRODUCT #	ROW	CONTACT CODE											
		1	2	3	4	5	6	7	8	9	10	11	12
84965-X02001 SEE NOTE 13 LEAD FREE OPTION	H	-	-	-	-	-	-	-	-	-	-	-	-
	G	-	-	-	-	-	-	-	-	-	-	-	-
	F	02	02	02	02	02	02	02	02	02	02	02	02
	E	02	02	02	02	02	02	02	02	02	02	02	02
	D	02	02	02	02	02	02	02	02	02	02	02	02
	C	02	02	02	02	02	02	02	02	02	02	02	02
	B	02	02	02	02	02	02	02	02	02	02	02	02
	A	02	02	02	02	02	02	02	02	02	02	02	02
	GND	-	-	-	-	-	-	-	-	-	-	-	-
PRODUCT #	ROW	CONTACT CODE											
		1	2	3	4	5	6	7	8	9	10	11	12
84965-X02002 SEE NOTE 13 LEAD FREE OPTION	H	-	-	-	-	-	-	-	-	-	-	-	-
	G	-	-	-	-	-	-	-	-	-	-	-	-
	F	-	-	-	-	-	-	-	-	-	-	-	-
	E	02	02	02	02	02	02	02	02	02	02	04	04
	D	02	02	02	02	02	02	02	02	02	02	04	04
	C	02	02	02	02	02	02	02	02	02	02	19	19
	B	02	02	02	02	02	02	02	02	02	02	19	19
	A	02	02	02	02	02	02	02	02	02	02	19	19
	GND	-	-	-	-	-	-	-	-	-	-	-	-
PRODUCT #	ROW	CONTACT CODE											
		1	2	3	4	5	6	7	8	9	10	11	12
84965-X02003 SEE NOTE 13 LEAD FREE OPTION	H	-	-	-	-	-	-	-	-	-	-	-	-
	G	-	-	-	-	-	-	-	-	-	-	-	-
	F	-	-	-	-	-	-	-	-	-	-	-	-
	E	02	02	02	02	02	02	02	02	02	02	02	02
	D	02	02	02	02	02	02	02	02	02	02	02	02
	C	02	02	02	02	02	02	02	02	02	02	02	02
	B	02	02	02	02	02	02	02	02	02	02	02	02
	A	02	02	02	02	02	02	02	02	02	02	02	02
	GND	-	-	-	-	-	-	-	-	-	-	-	-

B

mat'l code SEE NOTE 3				tolerances unless otherwise specified			CUSTOMER		FCI www.fciconnect.com		
ltr	ecr no.	dr	date	linear	0.X ±0.3		COPY				
P					0.XX ±0.13		projection				
					.XXX ±.051						
				angles	0° ±2°				title VERTICAL SIGNAL HDR 8 ROW P.F. 96 POS. SELECT LOAD EXT.		
				dr	E. KROPER.	2001-01-15	MM		product family METRAL		
				enrg	J. VOLSTORF	2001-01-15	scale		code 213		
				chr	J. VOLSTORF	2001-01-15	1:1		sheet 4		
				appd	J. VOLSTORF	2001-01-15					
sheet index		revision sheet									

B



PRODUCT NUMBER

SEE SHEET 1



NOTES:

1. SEE APPLICATION SPECIFICATION GS-20-010 FOR INFORMATION ON AVAILABLE TOOLING, CIRCUIT BOARD DESIGN CONSIDERATIONS, REPAIR PROCEDURES AND PRODUCT OFFERINGS.
2. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS AND TOLERANCES ARE IN ACCORDANCE WITH ASME Y14.5M, 1994
3. HOUSING MATERIAL: LIQUID CRYSTAL POLYMER, 30% GLASS FILLED, FLAME RETARDANT PER UL 94-V0. PIN MATERIAL: PHOSPHOR BRONZE
4. PLATING ON CONTACT AREAS PER PERFORMANCE LEVELS SHOWN IN TABLE ON SHEET 1. PLATING ON "LF" TAILS IS Sn ONLY. PLATING ON ALL OTHER TAILS IS SnPb.
5. DIMENSIONAL RESTRICTIONS OF PINS IN HEADERS.
 DIM A : 5.0mm MIN, 8.0mm MAX FOR ROWS A-H
 DIM C : 5.0mm MIN, 8.0mm MAX FOR ROWS A-H
6. THE MIN PCB THICKNESS FOR REAR PLUG-UP APPLICATIONS IS 1.6mm
7. USE SHROUD 98173-102 FOR REAR PLUG-UP APPLICATIONS.
8. THE 'CONNECTOR OUTLINE' IS THE MIN OUTLINE REQUIRED. TO DETERMINE THE OUTLINE NECESSARY TO PERMIT THE VARIOUS TYPES OF REPAIR OPERATIONS, SEE APPLICATION SPECIFICATION GS-20-010.

9. CURRENT RATING : 1 AMP PER PIN
10. TEMPERATURE RANGE : -55°C TO +105°C
11. P/N 84965-X02ZZZLF



12. PRODUCTS WHERE THE PART NUMBER ENDS IN "LF" MEET EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008. ALL PRODUCTS WILL WITHSTAND EXPOSURE TO 260°C FOR 60 SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW OVEN.
13. FOR LEAD FREE PART NUMBERS ADD "LF" SUFFIX. EXAMPLE: 84965-X02ZZZLF
14. PIN TYPE IS AT THE MANUFACTURERS OPTION AND CAN BE EITHER BABY-H OR EYE OF THE NEEDLE STYLE

mat'l code SEE NOTE 3				tolerances unless otherwise specified		CUSTOMER		 www.fciconnect.com		
ltr	ecr no.	dr	date	linear	0.X ±0.3		projection 	title VERTICAL SIGNAL HDR 8 ROW P.F. 96 POS. SELECT LOAD EXT		
P					0.XX ±0.13					
					.XXX ±.051					
				angles	0° ±2°		 scale 1:1	product family METRAL		code
				dr	E. KROPER.	2001-01-15		size A	dwg no 84965	213 sheet 5
				enr	J. VOLSTORF	2001-01-15				
				chr	J. VOLSTORF	2001-01-15				
				appd	J. VOLSTORF	2001-01-15				
sheet index	revision sheet									

cage code 22526

Pro/E

3

4

PDM: Rev:P

STATUS: Released

Printed: May 13, 2011

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru