

[illegible]



LOC	INST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	BYN	APVD
		A		FIRST VERSION	13JAN2015	GF	SM

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	BY	AP'D
		A		FIRST VERSION	13JAN2015	GF	SM

- | | | | | | | |
|-----|------|---------------|-----------|----|------|--|
| LOC | DIST | REVISIONS | | | | |
| P | LTR | DESCRIPTION | DATE | BY | AP'D | |
| A | | FIRST VERSION | 13JAN2015 | GF | SM | |
- FINISH: 3PPPER ALLOY, FINISH: TIN OVER NICKEL UNDERPLATE
LESS STRIP STEEL

- | LOC | INST | REV ISIONS | | | | |
|-----|---------------|-------------|-----------|-----|------|--|
| P | L/TB | DESCRIPTION | DATE | DMN | AP'D | |
| A | FIRST VERSION | | 13JAN2015 | GF | SM | |
- FINISH:
- 3
CUPPER ALLOY, FINISH: TIN OVER NICKEL UNDERPLATE
LESS STRIP STEEL
- H DIRECTIVE 2002/95/EC (ROHS)
- SIZES ACCEPTED
WG~26AWG.
5mm~10.5mm
- AY.
- 6Amp AC150V.
- TEMPERATURE: -40°C TO +105°C

LOC	INST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	BY	AP'D
		A		FIRST VERSION	13JAN2015	GF	SM

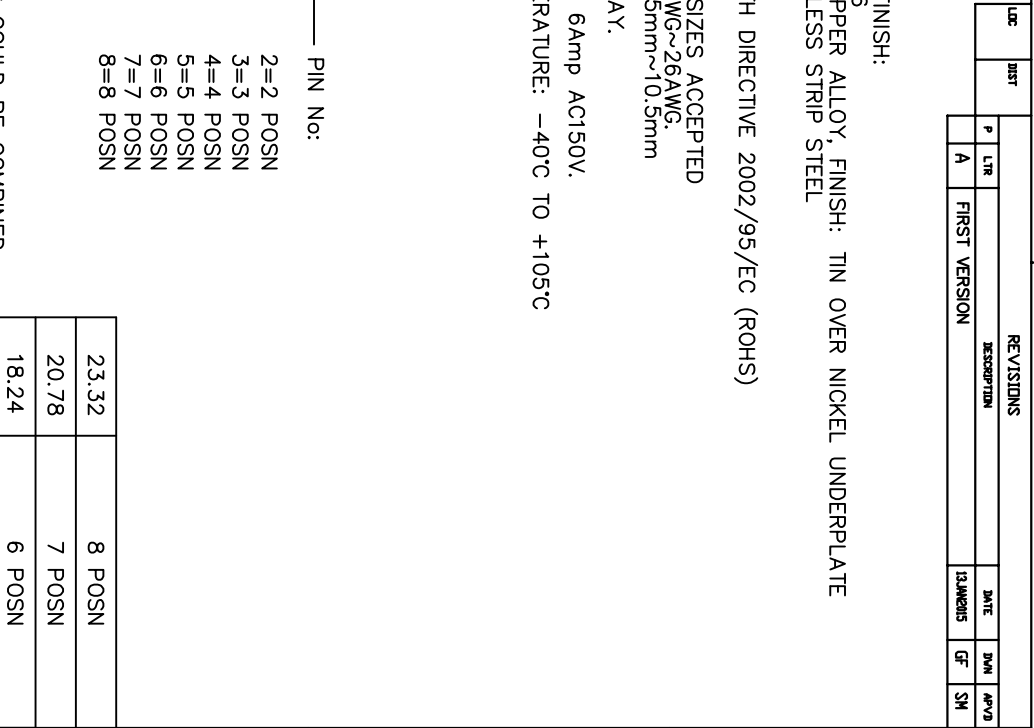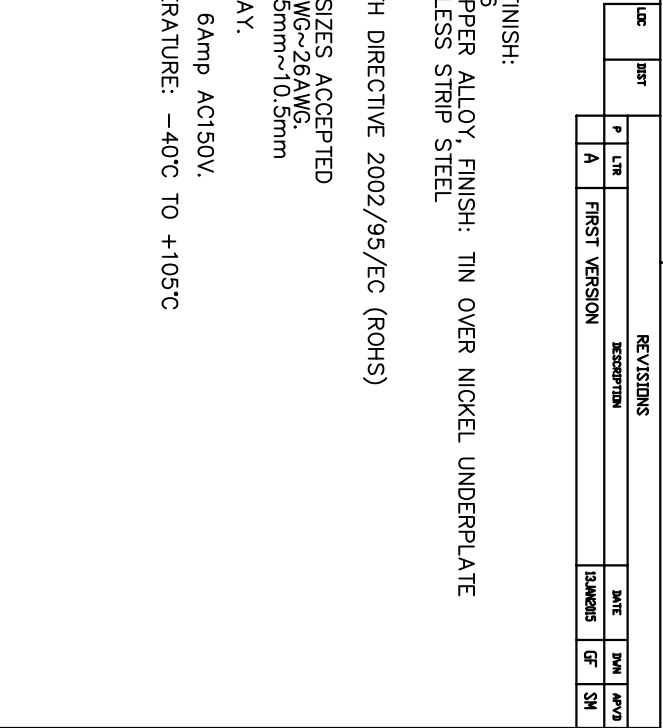

LOC	INST	REVISONS				
P	LTR	DESCRIPTION	DATE	BY	APP'D	
A		FIRST VERSION	13JAN2015	GF	SM	

FINISH: 5
 COPPER ALLOY, FINISH: TIN OVER NICKEL UNDERPLATE
 LESS STRIP STEEL

ROHS COMPLIANT: YES
 H DIRECTIVE 2002/95/EC (ROHS)

SIZES ACCEPTED
 WG~26AWG.
 bmm~10.5mm
 AY.

6amp AC150V.
 RATURE: -40°C TO +105°C

PIN No: —

2=2 POSN
 3=3 POSN
 4=4 POSN
 5=5 POSN
 6=6 POSN
 7=7 POSN
 8=8 POSN

23.32	8 POSN
20.78	7 POSN
18.24	6 POSN
15.70	5 POSN
13.16	4 POSN

COULD BE COMBINED
 OR CUSTOMER REQUEST.

LOC	INST	REVISIONS					
P	LTR	DESCRIPTION	DATE	DMN	AP'D		
A		FIRST VERSION	13JAN2015	GF	SM		

FINISH:

5
COPPER ALLOY, FINISH: TIN OVER NICKEL UNDERPLATE
LESS STRIP STEEL

1
H DIRECTIVE 2002/95/EC (ROHS)

2
SIZES ACCEPTED
WG~26AWG.
5mm~10.5mm

3
AY.

4
6Amp AC150V.
RATURE: -40°C TO +105°C

5
PIN No: _____

LOC	INST	REVISIONS				
P	LTR	DESCRIPTION	DATE	DMN	AP'D	
A		FIRST VERSION	13JAN2015	GF	SM	

FINISH:

UPPER ALLOY, FINISH: TIN OVER NICKEL UNDERPLATE
LESS STRIP STEEL

ROHS DIRECTIVE 2002/95/EC (ROHS)

SIZES ACCEPTED
WG~26AWG.
5mm~10.5mm

AY.

6amp AC150V.

TEMPERATURE: -40°C TO +105°C

LOC	INST	REVISIONS					
P	LTR	DESCRIPTION	DATE	DMN	AP'D		
A		FIRST VERSION	13JAN2015	GF	SM		

FINISH:

5
COPPER ALLOY, FINISH: TIN OVER NICKEL UNDERPLATE
LESS STRIP STEEL

1
H DIRECTIVE 2002/95/EC (ROHS)

2
SIZES ACCEPTED
WG~26AWG.
5mm~10.5mm

3
AY.

4
6Amp AC150V.
RATURE: -40°C TO +105°C

5
PIN No: _____

LOC	INST	REVISIONS					
P	LTR	DESCRIPTION	DATE	DMN	APP'D		
A		FIRST VERSION	13JAN2015	GF	SM		

FINISH: 3
 COPPER ALLOY, FINISH: TIN OVER NICKEL UNDERPLATE
 LESS STRIP STEEL

ROHS DIRECTIVE 2002/95/EC (ROHS)

SIZES ACCEPTED
 WG~26AWG.
 5mm~10.5mm
 AY.

6amp AC150V.
 RATURE: -40°C TO +105°C

PIN No: _____
 2=2 POSN

LOC	INST	REVISONS				
P	LTR	DESCRIPTION	DATE	DN	APVD	
A		FIRST VERSION	13JAN2015	GF	SM	

FINISH: 5
 CUPPER ALLOY, FINISH: TIN OVER NICKEL UNDERPLATE
 LESS STRIP STEEL

H DIRECTIVE 2002/95/EC (ROHS)

SIZES ACCEPTED
 WG~26AWG.
 5mm~10.5mm
 AY.

6amp AC150V.
 RATURE: -40°C TO +105°C

PIN No: _____

2=2 POSN
 3=3 POSN
 4=4 POSN
 5=5 POSN
 6=6 POSN
 7=7 POSN
 8=8 POSN

23 32	8 POSN
-------	--------

LOC	INST	REVISIUNS				
P	LIT	DESCRIPTION	DATE	DM	APV	
A		FIRST VERSION	13JAN2015	GF	SM	

FINISH: 3
 CUPPER ALLOY, FINISH: TIN OVER NICKEL UNDERPLATE
 LESS STRIP STEEL

ROHS DIRECTIVE 2002/95/EC (ROHS)

SIZES ACCEPTED
 WG~26AWG.
 5mm~10.5mm

AY.

6amp AC150V.
 RATURE: -40°C TO +105°C

PIN No: —

2=2 POSN
 3=3 POSN
 4=4 POSN
 5=5 POSN
 6=6 POSN
 7=7 POSN
 8=8 POSN

23.32	8 POSN
20.78	7 POSN
18.24	6 POSN
15.70	5 POSN

COULD BE COMBINED
 OR CUSTOMER REQUEST.

LOC	INST	REVISIUNS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
A	FIRST VERSION		13JAN2015	GF	SM

FINISH: 3
 UPPER ALLOY, FINISH: TIN OVER NICKEL UNDERPLATE
 LESS STRIP STEEL

ROHS DIRECTIVE 2002/95/EC (ROHS)

SIZES ACCEPTED
 WG~26AWG.
 5mm~10.5mm

RAY.

6amp AC150V.
 TEMPERATURE: -40°C TO +105°C

— PIN No:

2=2 POSN
 3=3 POSN
 4=4 POSN
 5=5 POSN
 6=6 POSN
 7=7 POSN
 8=8 POSN

23.32	8 POSN
20.78	7 POSN
18.24	6 POSN
15.70	5 POSN
13.16	4 POSN
10.62	3 POSN
8.08	2 POSN
A	NO. OF POSITIONS

COULD BE COMBINED
 FOR CUSTOMER REQUEST.

LOC	INST	REVISIUNS			
P	LTR	DESCRIPTION	DATE	DMN	APVD
A		FIRST VERSION	13JAN2015	GF	SM

FINISH:

3 UPPER ALLOY, FINISH: TIN OVER NICKEL UNDERPLATE
LESS STRIP STEEL

H DIRECTIVE 2002/95/EC (ROHS)

SIZES ACCEPTED
WG~26AWG.
5mm~10.5mm

AY.

6Amp AC150V.
RATURE: -40°C TO +105°C

PIN No: _____

2=2 POSN
3=3 POSN
4=4 POSN
5=5 POSN
6=6 POSN
7=7 POSN
8=8 POSN

23.32	8 POSN
20.78	7 POSN
18.24	6 POSN
15.70	5 POSN
13.16	4 POSN
10.62	3 POSN
8.08	2 POSN
A	NO. OF POSITIONS

COULD BE COMBINED
OR CUSTOMER REQUEST.

CONTROLLED DOCUMENT. 13JAN2015
GEORGE FLORES

LOC		INST	REVISIONS				
P	LTR		DESCRIPTION	DATE	DWN	APVD	
A		FIRST VERSION		13JAN2015	GF	SM	

FINISH:
5
PPER ALLOY, FINISH: TIN OVER NICKEL UNDERPLATE
LESS STRIP STEEL

H DIRECTIVE 2002/95/EC (ROHS)

SIZES ACCEPTED
WG~26AWG.
bmm~10.5mm

AY.

6amp AC150V.
RATURE: -40°C TO +105°C

PIN No:
—

2=2 POSN
3=3 POSN
4=4 POSN
5=5 POSN
6=6 POSN
7=7 POSN
8=8 POSN

COULD BE COMBINED
OR CUSTOMER REQUEST.

23.32	8 POSN
20.78	7 POSN
18.24	6 POSN
15.70	5 POSN
13.16	4 POSN
10.62	3 POSN
8.08	2 POSN
A	NO. OF POSITIONS

A CONTROLLED DOCUMENT.

DATE	13JAN2015	BY	GEORGE FU
REVISED	13JAN2015	BY	SHI MING
DESIGNED BY	XU XIANG	DATE	108-137080
APPROVED BY	114-137080	DATE	-

STE
TE Connectivity

254mm Pitch Modular Screwless Conn.

SIZE CAGE CODE IRRAWING NO RESTRICTED TO

A200779C-2834016-

CUSTOMER DRAWING SCALE 1:1 SHEET 1 OF 1 REV A

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru