

## FEATURES

Qualified for automotive applications (ADA4853-3W only)

Ultralow disable current: 0.1  $\mu$ A

Low quiescent current: 1.4 mA/amplifier

Ideal for standard definition video

High speed

100 MHz,  $-3$  dB bandwidth

120 V/ $\mu$ s slew rate

0.5 dB flatness: 22 MHz

Differential gain: 0.20%

Differential phase: 0.10°

Single-supply operation

Rail-to-rail output

Output swings to within 200 mV of either rail

Low voltage offset: 1 mV

Wide supply range: 2.65 V to 5 V

## APPLICATIONS

Automotive infotainment systems

Automotive safety systems

Portable multimedia players

Video cameras

Digital still cameras

Consumer video

Clock buffer

## GENERAL DESCRIPTION

The ADA4853-1/ADA4853-2/ADA4853-3 are low power, low cost, high speed, rail-to-rail output op amps with ultralow power disables that are ideal for portable consumer electronics. Despite their low price, the ADA4853-1/ADA4853-2/ADA4853-3 provide excellent overall performance and versatility. The 100 MHz,  $-3$  dB bandwidth, and 120 V/ $\mu$ s slew rate make these amplifiers well-suited for many general-purpose, high speed applications.

The ADA4853-1/ADA4853-2/ADA4853-3 voltage feedback op amps are designed to operate at supply voltages as low as 2.65 V and up to 5 V using only 1.4 mA of supply current per amplifier. To further reduce power consumption, the amplifiers are equipped with a disable mode that lowers the supply current to less than 1.5  $\mu$ A maximum, making them ideal in battery-powered applications.

The ADA4853-1/ADA4853-2/ADA4853-3 provide users with a true single-supply capability, allowing input signals to extend 200 mV below the negative rail and to within 1.2 V of the positive rail. On the output, the amplifiers can swing within 200 mV of either supply rail. With their combination of low price, excellent differential gain (0.2%), differential phase (0.10°), and 0.5 dB flatness out to 22 MHz, these amplifiers are ideal for video applications.

### Rev. F

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

## PIN CONFIGURATIONS






Figure 1. 6-Lead SC70  
ADA4853-3

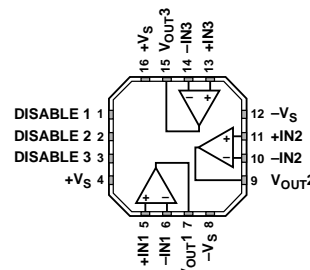

NOTES  
1. EXPOSED DIE PAD MUST BE CONNECTED TO GND.

Figure 3. 16-Lead LFCSP\_VQ



NOTES  
1. NC = NO CONNECT.  
2. EXPOSED DIE PAD MUST BE CONNECTED TO GND.

Figure 2. 16-Lead LFCSP\_VQ




Figure 4. 14-Lead TSSOP

The ADA4853-1 is available in a 6-lead SC70, the ADA4853-2 is available in a 16-lead LFCSP\_VQ, and the ADA4853-3 is available in both a 16-lead LFCSP\_VQ and a 14-lead TSSOP. The ADA4853-1 temperature range is  $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$  while the ADA4853-2/ADA4853-3 temperature range is  $-40^{\circ}\text{C}$  to  $+105^{\circ}\text{C}$ .

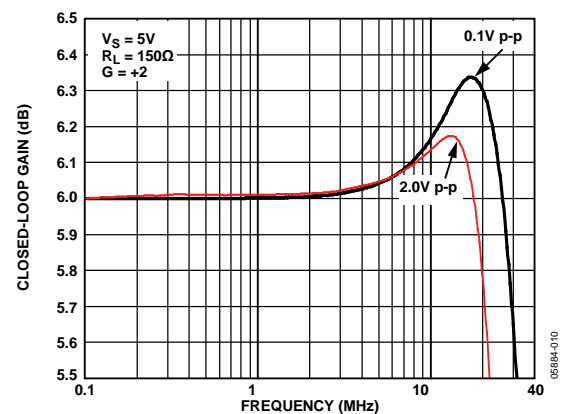


Figure 5. 0.5 dB Flatness Frequency Response

**TABLE OF CONTENTS**

|                                      |   |   |    |
|--------------------------------------|---|---|----|
| Features .....                       | 1 | Typical Performance Characteristics ..... | 8  |
| Applications.....                    | 1 | Circuit Description.....                  | 16 |
| Pin Configurations .....             | 1 | Headroom Considerations.....              | 16 |
| General Description .....            | 1 | Overload Behavior and Recovery .....      | 16 |
| Revision History .....               | 2 | Applications Information .....            | 17 |
| Specifications.....                  | 3 | Single-Supply Video Amplifier.....        | 17 |
| Specifications with 3 V Supply ..... | 3 | Power Supply Bypassing .....              | 17 |
| Specifications with 5 V Supply ..... | 5 | Layout .....                              | 17 |
| Absolute Maximum Ratings.....        | 7 | Outline Dimensions .....                  | 18 |
| Thermal Resistance .....             | 7 | Ordering Guide .....                      | 19 |
| ESD Caution.....                     | 7 | Automotive Products.....                  | 19 |

**REVISION HISTORY**

**1/11—Rev. E to Rev. F**

|  |    |
|--|----|
| Changes to Features Section, Applications Section, and General Description Section ..... | 1  |
| Changed Pin 5 to DISABLE in Figure 1 .....   | 1  |
| Changed Pin 13 to DISABLE 2 and Pin 14 and DISABLE 1 in Figure 2 .....                   | 1  |
| Changes to Table 1 .....   | 3  |
| Changes to Table 2.....  | 5  |
| Changes to Ordering Guide .....  | 18 |
| Added Automotive Products Section.....   | 18 |

**9/10—Rev. D to Rev. E**

|  |   |
|--|---|
| Changes to Figure 2 and Figure 3 ..... | 1 |
|--|---|

**6/10—Rev. C to Rev. D**

|  |    |
|--|----|
| Changes to Figure 2 and Figure 3 ..... | 1  |
| Changes to Outline Dimensions.....     | 16 |

**10/07—Rev. B to Rev. C**

|                                       |    |
|---------------------------------------|----|
| Changes to Applications Section ..... | 1  |
| Changes to Ordering Guide .....       | 16 |

**10/06—Rev. A to Rev. B**

|   |           |
|---|-----------|
| Added ADA4853-3.....  | Universal |
| Added 16-Lead LFCSP_VQ .....  | Universal |
| Added 14-Lead TSSOP .....   | Universal |
| Changes to Features.....  | 1         |
| Changes to DC Performance, Input Characteristics, and Power Supply Sections ..... | 3         |
| Changes to DC Performance, Input Characteristics, and Power Supply Sections ..... | 4         |
| Changes to Figure 20.....   | 8         |
| Changes to Figure 49.....   | 13        |
| Updated Outline Dimensions .....  | 16        |
| Changes to Ordering Guide .....   | 16        |

**7/06—Rev. 0 to Rev. A**

|  |           |
|--|-----------|
| Added ADA4853-2.....   | Universal |
| Changes to Features and General Description .....                      | 1         |
| Changes to Table 1.....  | 3         |
| Changes to Table 2.....  | 4         |
| Changes to Table 3.....  | 5         |
| Changes to Figure 7.....   | 6         |
| Changes to Figure 11 Caption, Figure 12, Figure 13, and Figure 16..... | 7         |
| Changes to Figure 17 and Figure 19 .....                               | 8         |
| Inserted Figure 21; Renumbered Sequentially .....                      | 8         |
| Inserted Figure 25; Renumbered Sequentially .....                      | 9         |
| Changes to Figure 28.....  | 9         |
| Changes to Figure 31 through Figure 35.....                            | 10        |
| Changes to Figure 37, Figure 39 through Figure 42 .....                | 11        |
| Inserted Figure 43 and Figure 46.....                                  | 12        |
| Inserted Figure 47.....  | 13        |
| Changes to Circuit Description Section .....                           | 13        |
| Changes to Headroom Considerations Section .....                       | 13        |
| Changes to Figure 48.....  | 14        |
| Updated Outline Dimensions.....  | 15        |
| Changes to Ordering Guide .....  | 15        |

**1/06—Revision 0: Initial Version**

# SPECIFICATIONS

## SPECIFICATIONS WITH 3 V SUPPLY

$T_A = 25^\circ\text{C}$ ,  $R_F = 1\text{ k}\Omega$ ,  $R_G = 1\text{ k}\Omega$  for  $G = +2$ ,  $R_L = 150\ \Omega$ , unless otherwise noted.

Table 1.

| Parameter                                 | Conditions  | Min        | Typ                            | Max | Unit                         |
|---|---|------------|--------------------------------|-----|------------------------------|
| <b>DYNAMIC PERFORMANCE</b>                |   |            |                                |     |                              |
| -3 dB Bandwidth                           | $G = +1, V_O = 0.1\text{ V p-p}$  |            | 90                             |     | MHz                          |
|   | $G = +2, V_O = 2\text{ V p-p}$  |            | 32                             |     | MHz                          |
| Bandwidth for 0.5 dB Flatness             | $G = +2, V_O = 2\text{ V p-p}, R_L = 150\ \Omega$                           |            | 22                             |     | MHz                          |
| Settling Time to 0.1%                     | $V_O = 2\text{ V step}$   |            | 45                             |     | ns                           |
| Slew Rate                                 | $G = +2, V_O = 2\text{ V step}$   | 88         | 100                            |     | V/ $\mu\text{s}$             |
|   | ADA4853-3W only: $T_{\text{MIN}}$ to $T_{\text{MAX}}$                       | 60         |                                |     | V/ $\mu\text{s}$             |
| <b>NOISE/DISTORTION PERFORMANCE</b>       |   |            |                                |     |                              |
| Differential Gain                         | $R_L = 150\ \Omega$   |            | 0.20                           |     | %                            |
| Differential Phase                        | $R_L = 150\ \Omega$   |            | 0.10                           |     | Degrees                      |
| Input Voltage Noise                       | $f = 100\text{ kHz}$  |            | 22                             |     | nV/ $\sqrt{\text{Hz}}$       |
| Input Current Noise                       | $f = 100\text{ kHz}$  |            | 2.2                            |     | pA/ $\sqrt{\text{Hz}}$       |
| Crosstalk                                 | $G = +2, V_O = 2\text{ V p-p}, R_L = 150\ \Omega, f = 5\text{ MHz}$         |            | -66                            |     | dB                           |
| <b>DC PERFORMANCE</b>                     |   |            |                                |     |                              |
| Input Offset Voltage                      |   |            | 1                              | 4.0 | mV                           |
|   | ADA4853-3W only: $T_{\text{MIN}}$ to $T_{\text{MAX}}$                       |            |                                | 6.0 | mV                           |
| Input Offset Voltage Drift                |   |            | 1.6                            |     | $\mu\text{V}/^\circ\text{C}$ |
| Input Bias Current                        |   |            | 1.0                            | 1.7 | $\mu\text{A}$                |
|   | ADA4853-3W only: $T_{\text{MIN}}$ to $T_{\text{MAX}}$                       |            |                                | 1.7 | $\mu\text{A}$                |
| Input Bias Current Drift                  |   |            | 4                              |     | nA/ $^\circ\text{C}$         |
| Input Bias Offset Current                 |   |            | 50                             |     | nA                           |
| Open-Loop Gain                            | $V_O = 0.5\text{ V to }2.5\text{ V}$  | 72         | 80                             |     | dB                           |
|   | ADA4853-3W only: $T_{\text{MIN}}$ to $T_{\text{MAX}}$                       | 69         |                                |     | dB                           |
| <b>INPUT CHARACTERISTICS</b>              |   |            |                                |     |                              |
| Input Resistance                          | Differential/common mode  |            | 0.5/20                         |     | M $\Omega$                   |
| Input Capacitance                         |   |            | 0.6                            |     | pF                           |
| Input Common-Mode Voltage Range           |   |            | -0.2 to $+V_{\text{CC}} - 1.2$ |     | V                            |
| Input Overdrive Recovery Time (Rise/Fall) | $V_{\text{IN}} = -0.5\text{ V to }+3.5\text{ V}, G = +1$                    |            | 40                             |     | ns                           |
| Common-Mode Rejection Ratio               | $V_{\text{CM}} = 0\text{ V to }1\text{ V}$                                  | -69        | -85                            |     | dB                           |
|   | ADA4853-3W only: $T_{\text{MIN}}$ to $T_{\text{MAX}}$                       | -66        |                                |     | dB                           |
| <b>DISABLE</b>                            |   |            |                                |     |                              |
| DISABLE Input Voltage                     |   |            | 1.2                            |     | V                            |
| Turn-Off Time                             |   |            | 1.4                            |     | $\mu\text{s}$                |
| Turn-On Time                              |   |            | 120                            |     | ns                           |
| DISABLE Bias Current                      |   |            |                                |     |                              |
| Enabled                                   | DISABLE = 3.0 V   |            | 25                             | 30  | $\mu\text{A}$                |
|   | DISABLE = 3.0 V, ADA4853-3W only:<br>$T_{\text{MIN}}$ to $T_{\text{MAX}}$   |            |                                | 30  | $\mu\text{A}$                |
| Disabled                                  | DISABLE = 0 V   |            | 0.01                           |     | $\mu\text{A}$                |
| <b>OUTPUT CHARACTERISTICS</b>             |   |            |                                |     |                              |
| Output Overdrive Recovery Time            | $V_{\text{IN}} = -0.25\text{ V to }+1.75\text{ V}, G = +2$                  |            | 70                             |     | ns                           |
| Output Voltage Swing                      | $R_L = 150\ \Omega$   | 0.3 to 2.7 | 0.15 to 2.88                   |     | V                            |
|   | $R_L = 150\ \Omega$ , ADA4853-3W only: $T_{\text{MIN}}$ to $T_{\text{MAX}}$ | 0.3 to 2.7 |                                |     | V                            |
| Short-Circuit Current                     | Sinking/sourcing  |            | 150/120                        |     | mA                           |

# ADA4853-1/ADA4853-2/ADA4853-3

| Parameter                              | Conditions   | Min  | Typ | Max | Unit    |
|--|--|------|-----|-----|---------|
| POWER SUPPLY                           |  |      |     |     |         |
| Operating Range                        |  | 2.65 |     | 5   | V       |
| Quiescent Current/Amplifier            |  |      | 1.3 | 1.6 | mA      |
|  | ADA4853-3W only: $T_{MIN}$ to $T_{MAX}$                |      |     | 1.6 | mA      |
| Quiescent Current (Disabled)/Amplifier | DISABLE = 0 V  |      | 0.1 | 1.5 | $\mu$ A |
|  | DISABLE = 0 V, ADA4853-3W only: $T_{MIN}$ to $T_{MAX}$ |      |     | 1.5 | $\mu$ A |
| Positive Power Supply Rejection        | $+V_S = +1.5$ V to $+2.5$ V, $-V_S = -1.5$ V           | -76  | -86 |     | dB      |
|  | ADA4853-3W only: $T_{MIN}$ to $T_{MAX}$                | -76  |     |     | dB      |
| Negative Power Supply Rejection        | $-V_S = -1.5$ V to $-2.5$ V, $+V_S = +1.5$ V           | -77  | -88 |     | dB      |
|  | ADA4853-3W only: $T_{MIN}$ to $T_{MAX}$                | -74  |     |     | dB      |

**SPECIFICATIONS WITH 5 V SUPPLY**

$T_A = 25^\circ\text{C}$ ,  $R_F = 1\text{ k}\Omega$ ,  $R_G = 1\text{ k}\Omega$  for  $G = +2$ ,  $R_L = 150\ \Omega$ , unless otherwise noted.

**Table 2.**

| Parameter                                 | Conditions   | Min         | Typ                            | Max | Unit                         |
|---|--|-------------|--------------------------------|-----|------------------------------|
| <b>DYNAMIC PERFORMANCE</b>                |  |             |                                |     |                              |
| -3 dB Bandwidth                           | $G = +1, V_O = 0.1\text{ V p-p}$   |             | 100                            |     | MHz                          |
|   | $G = +2, V_O = 2\text{ V p-p}$   |             | 35                             |     | MHz                          |
| Bandwidth for 0.5 dB Flatness             | $G = +2, V_O = 2\text{ V p-p}$   |             | 22                             |     | MHz                          |
| Settling Time to 0.1%                     | $V_O = 2\text{ V step}$  |             | 54                             |     | ns                           |
| Slew Rate                                 | $G = +2, V_O = 2\text{ V step}$  | 93          | 120                            |     | V/ $\mu\text{s}$             |
|   | ADA4853-3W only: $T_{\text{MIN}}$ to $T_{\text{MAX}}$                      | 70          |                                |     | V/ $\mu\text{s}$             |
| <b>NOISE/DISTORTION PERFORMANCE</b>       |  |             |                                |     |                              |
| Differential Gain                         | $R_L = 150\ \Omega$  |             | 0.22                           |     | %                            |
| Differential Phase                        | $R_L = 150\ \Omega$  |             | 0.10                           |     | Degrees                      |
| Input Voltage Noise                       | $f = 100\text{ kHz}$   |             | 22                             |     | nV/ $\sqrt{\text{Hz}}$       |
| Input Current Noise                       | $f = 100\text{ kHz}$   |             | 2.2                            |     | pA/ $\sqrt{\text{Hz}}$       |
| Crosstalk                                 | $G = +2, V_O = 2\text{ V p-p}, R_L = 150\ \Omega, f = 5\text{ MHz}$        |             | -66                            |     | dB                           |
| <b>DC PERFORMANCE</b>                     |  |             |                                |     |                              |
| Input Offset Voltage                      |  |             | 1                              | 4.1 | mV                           |
|   | ADA4853-3W only: $T_{\text{MIN}}$ to $T_{\text{MAX}}$                      |             |                                | 6.0 | mV                           |
| Input Offset Voltage Drift                |  |             | 1.6                            |     | $\mu\text{V}/^\circ\text{C}$ |
| Input Bias Current                        |  |             | 1.0                            | 1.7 | $\mu\text{A}$                |
|   | ADA4853-3W only: $T_{\text{MIN}}$ to $T_{\text{MAX}}$                      |             |                                | 1.7 | $\mu\text{A}$                |
| Input Bias Current Drift                  |  |             | 4                              |     | nA/ $^\circ\text{C}$         |
| Input Bias Offset Current                 |  |             | 60                             |     | nA                           |
| Open-Loop Gain                            | $V_O = 0.5\text{ V to }4.5\text{ V}$                                       | 72          | 80                             |     | dB                           |
|   | ADA4853-3W only: $T_{\text{MIN}}$ to $T_{\text{MAX}}$                      | 70          |                                |     | dB                           |
| <b>INPUT CHARACTERISTICS</b>              |  |             |                                |     |                              |
| Input Resistance                          | Differential/common mode   |             | 0.5/20                         |     | M $\Omega$                   |
| Input Capacitance                         |  |             | 0.6                            |     | pF                           |
| Input Common-Mode Voltage Range           |  |             | -0.2 to $+V_{\text{CC}} - 1.2$ |     | V                            |
| Input Overdrive Recovery Time (Rise/Fall) | $V_{\text{IN}} = -0.5\text{ V to }+5.5\text{ V}, G = +1$                   |             | 40                             |     | ns                           |
| Common-Mode Rejection Ratio               | $V_{\text{CM}} = 0\text{ V to }3\text{ V}$                                 | -71         | -88                            |     | dB                           |
|   | ADA4853-3W only: $T_{\text{MIN}}$ to $T_{\text{MAX}}$                      | -68         |                                |     | dB                           |
| <b>DISABLE</b>                            |  |             |                                |     |                              |
| DISABLE Input Voltage                     |  |             | 1.2                            |     | V                            |
| Turn-Off Time                             |  |             | 1.5                            |     | $\mu\text{s}$                |
| Turn-On Time                              |  |             | 120                            |     | ns                           |
| DISABLE Bias Current Enabled              | DISABLE = 5 V  |             | 40                             | 50  | $\mu\text{A}$                |
|   | DISABLE = 5 V, ADA4853-3W only: $T_{\text{MIN}}$ to $T_{\text{MAX}}$       |             |                                | 50  | $\mu\text{A}$                |
| Disabled                                  | DISABLE = 0 V  |             | 0.01                           |     | $\mu\text{A}$                |
| <b>OUTPUT CHARACTERISTICS</b>             |  |             |                                |     |                              |
| Output Overdrive Recovery Time            | $V_{\text{IN}} = -0.25\text{ V to }+2.75\text{ V}, G = +2$                 |             | 55                             |     | ns                           |
| Output Voltage Swing                      | $R_L = 75\ \Omega$   | 0.55 to 4.5 | 0.1 to 4.8                     |     | V                            |
|   | $R_L = 75\ \Omega$ , ADA4853-3W only: $T_{\text{MIN}}$ to $T_{\text{MAX}}$ | 0.55 to 4.5 |                                |     | V                            |
| Short-Circuit Current                     | Sinking/sourcing   |             | 160/120                        |     | mA                           |

# ADA4853-1/ADA4853-2/ADA4853-3

| Parameter                              | Conditions   | Min  | Typ | Max | Unit    |
|--|--|------|-----|-----|---------|
| POWER SUPPLY                           |  |      |     |     |         |
| Operating Range                        |  | 2.65 |     | 5   | V       |
| Quiescent Current/Amplifier            |  |      | 1.4 | 1.8 | mA      |
| Quiescent Current (Disabled)/Amplifier | ADA4853-3W only: $T_{MIN}$ to $T_{MAX}$                |      |     | 1.8 | mA      |
|  | DISABLE = 0 V  |      | 0.1 | 1.5 | $\mu$ A |
| Positive Power Supply Rejection        | DISABLE = 0 V, ADA4853-3W only: $T_{MIN}$ to $T_{MAX}$ |      |     | 1.5 | $\mu$ A |
|  | $+V_S = +2.5$ V to $+3.5$ V, $-V_S = -2.5$ V           | -75  | -80 |     | dB      |
| Negative Power Supply Rejection        | ADA4853-3W only: $T_{MIN}$ to $T_{MAX}$                | -72  |     |     |         |
|  | $-V_S = -2.5$ V to $-3.5$ V, $+V_S = +2.5$ V           | -75  | -80 |     | dB      |
|  | ADA4853-3W only: $T_{MIN}$ to $T_{MAX}$                | -72  |     |     | dB      |

## ABSOLUTE MAXIMUM RATINGS

Table 3.

| Parameter                   | Rating   |
|-----------------------------|--|
| Supply Voltage              | 5.5 V  |
| Power Dissipation           | See Figure 6                                   |
| Common-Mode Input Voltage   | $-V_S - 0.2\text{ V}$ to $+V_S - 1.2\text{ V}$ |
| Differential Input Voltage  | $\pm V_S$                                      |
| Storage Temperature Range   | $-65^\circ\text{C}$ to $+125^\circ\text{C}$    |
| Operating Temperature Range |  |
| 6-Lead SC70                 | $-40^\circ\text{C}$ to $+85^\circ\text{C}$     |
| 16-Lead LFCSP_VQ            | $-40^\circ\text{C}$ to $+105^\circ\text{C}$    |
| 14-Lead TSSOP               | $-40^\circ\text{C}$ to $+105^\circ\text{C}$    |
| Lead Temperature            | JEDEC J-STD-20                                 |
| Junction Temperature        | $150^\circ\text{C}$                            |

Stresses above those listed under Absolute Maximum Ratings may cause permanent damage to the device. This is a stress rating only; functional operation of the device at these or any other conditions above those indicated in the operational section of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

### THERMAL RESISTANCE

$\theta_{JA}$  is specified for the worst-case conditions, that is,  $\theta_{JA}$  is specified for the device soldered in the circuit board for surface-mount packages.

Table 4.

| Package Type     | $\theta_{JA}$ | Unit                      |
|------------------|---------------|---------------------------|
| 6-Lead SC70      | 430           | $^\circ\text{C}/\text{W}$ |
| 16-Lead LFCSP_VQ | 63            | $^\circ\text{C}/\text{W}$ |
| 14-Lead TSSOP    | 120           | $^\circ\text{C}/\text{W}$ |

### Maximum Power Dissipation

The maximum safe power dissipation for the ADA4853-1/ADA4853-2/ADA4853-3 is limited by the associated rise in junction temperature ( $T_J$ ) on the die. At approximately  $150^\circ\text{C}$ , which is the glass transition temperature, the plastic changes its properties. Even temporarily exceeding this temperature limit can change the stresses that the package exerts on the die, permanently shifting the parametric performance of the amplifiers. Exceeding a junction temperature of  $150^\circ\text{C}$  for an extended period can result in changes in silicon devices, potentially causing degradation or loss of functionality.

The power dissipated in the package ( $P_D$ ) for a sine wave and a resistor load is the total power consumed from the supply minus the load power.

$$P_D = \text{Total Power Consumed} - \text{Load Power}$$

$$P_D = \left( V_{\text{SUPPLY VOLTAGE}} \times I_{\text{SUPPLY CURRENT}} \right) - \frac{V_{\text{OUT}}^2}{R_L}$$

RMS output voltages should be considered.

Airflow increases heat dissipation, effectively reducing  $\theta_{JA}$ . In addition, more metal directly in contact with the package leads and through holes under the device reduces  $\theta_{JA}$ .

Figure 6 shows the maximum safe power dissipation in the package vs. the ambient temperature for the 6-lead SC70 ( $430^\circ\text{C}/\text{W}$ ), the 14-lead TSSOP ( $120^\circ\text{C}/\text{W}$ ), and the 16-lead LFCSP\_VQ ( $63^\circ\text{C}/\text{W}$ ) on a JEDEC standard 4-layer board.  $\theta_{JA}$  values are approximations.



Figure 6. Maximum Power Dissipation vs. Temperature for a 4-Layer Board

### ESD CAUTION



**ESD (electrostatic discharge) sensitive device.** Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

## TYPICAL PERFORMANCE CHARACTERISTICS



Figure 7. Small Signal Frequency Response for Various Gains

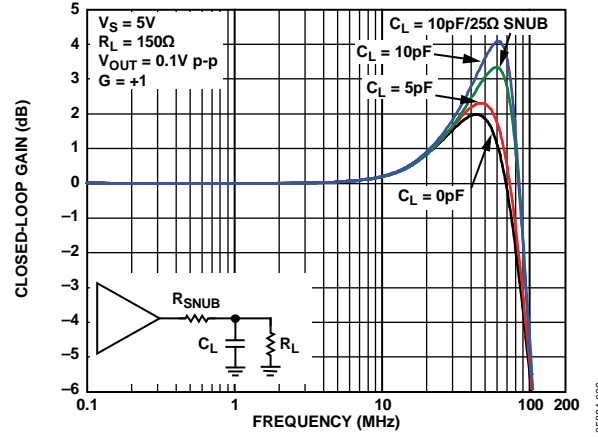


Figure 10. Small Signal Frequency Response for Various Capacitive Loads



Figure 8. Small Signal Frequency Response for Various Loads



Figure 11. 0.5 dB Flatness Response for Various Output Voltages



Figure 9. Small Signal Frequency Response for Various Supplies



Figure 12. ADA4853-3 LFCSP\_VQ Flatness Response for Various Output Voltages





Figure 13. Large Signal Frequency Response for Various Gains



Figure 16. Small Signal Frequency Response for Various Temperatures



Figure 14. Large Signal Frequency Response for Various Loads

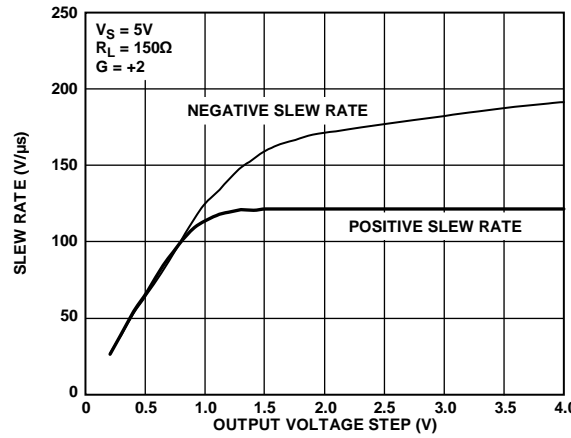


Figure 17. Slew Rate vs. Output Voltage



Figure 15. Small Signal Frequency Response for Various Temperatures

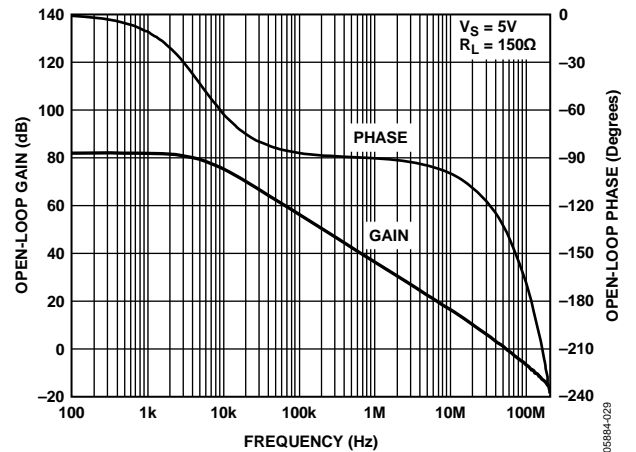


Figure 18. Open-Loop Gain and Phase vs. Frequency

# ADA4853-1/ADA4853-2/ADA4853-3



Figure 19. Common-Mode Rejection vs. Frequency

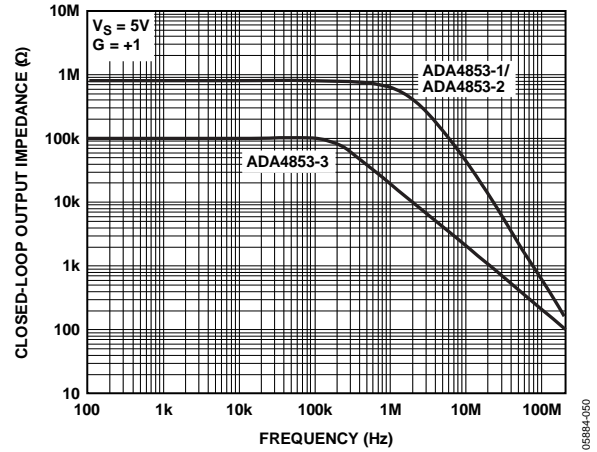


Figure 22. Output Impedance vs. Frequency Disabled



Figure 20. Power Supply Rejection vs. Frequency

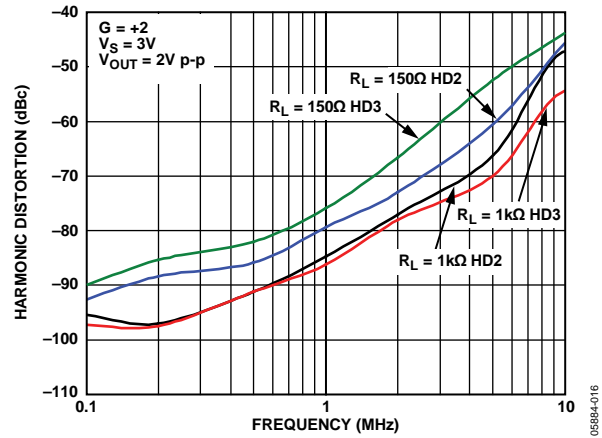


Figure 23. Harmonic Distortion vs. Frequency



Figure 21. Output Impedance vs. Frequency Enabled

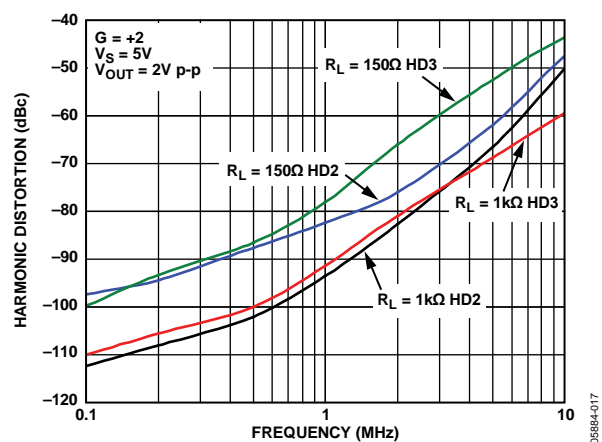


Figure 24. Harmonic Distortion vs. Frequency



Figure 25. Harmonic Distortion vs. Frequency

05984-018

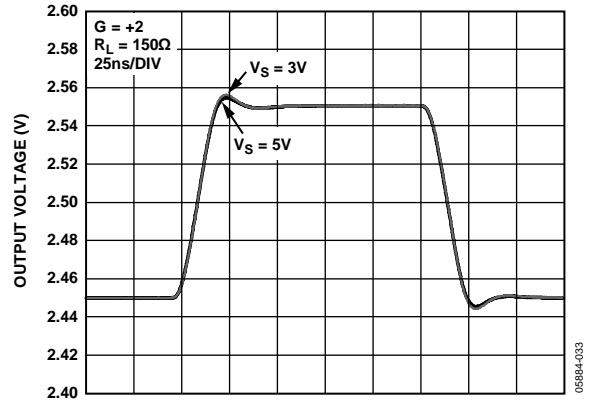


Figure 28. Small Signal Pulse Response for Various Supplies

05984-033



Figure 26. Harmonic Distortion vs. Frequency

05984-051

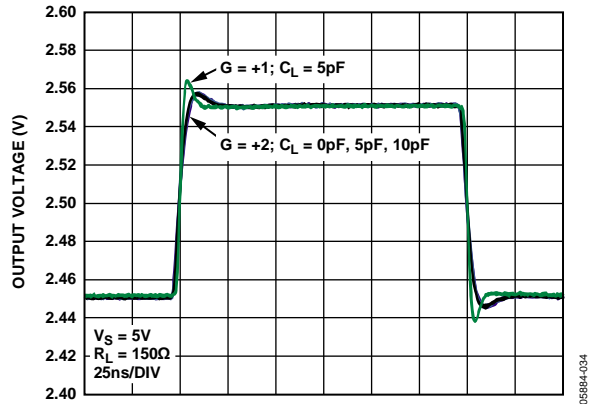


Figure 29. Small Signal Pulse Response for Various Capacitive Loads

05984-034



Figure 27. Harmonic Distortion for Various Output Voltages

05984-019

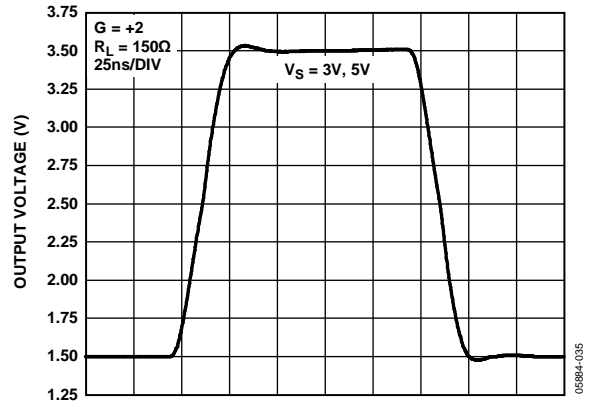


Figure 30. Large Signal Pulse Response for Various Supplies

05984-035

# ADA4853-1/ADA4853-2/ADA4853-3



Figure 31. Large Signal Pulse Response for Various Capacitive Loads



Figure 34. Voltage Noise vs. Frequency

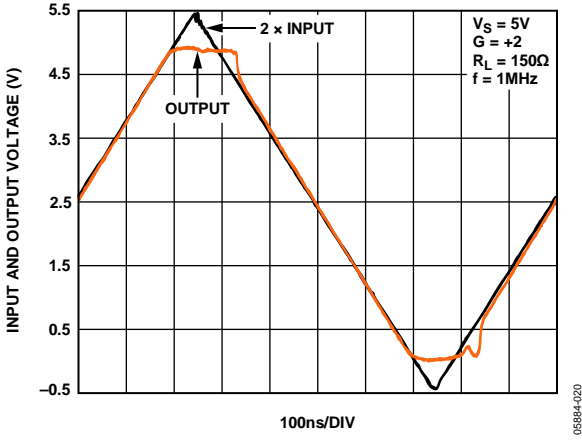


Figure 32. Output Overdrive Recovery

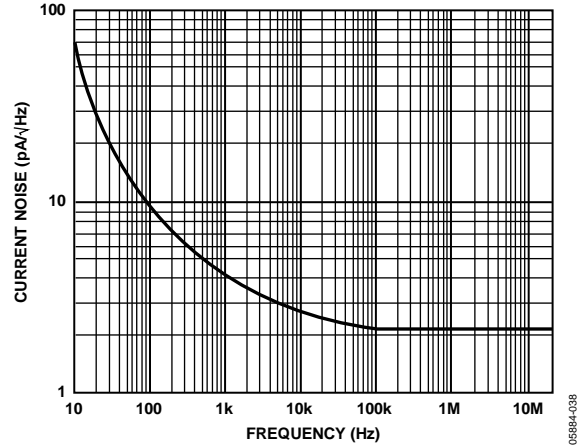


Figure 35. Current Noise vs. Frequency

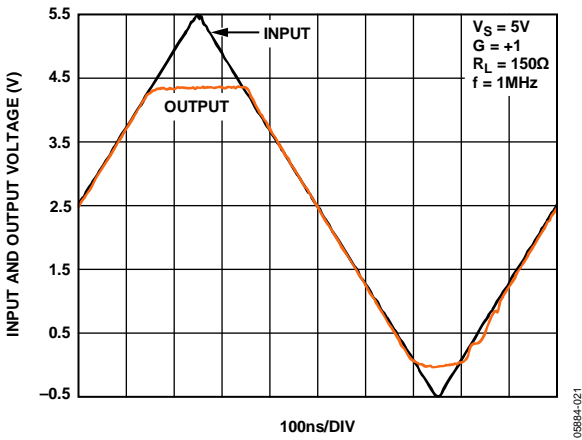


Figure 33. Input Overdrive Recovery

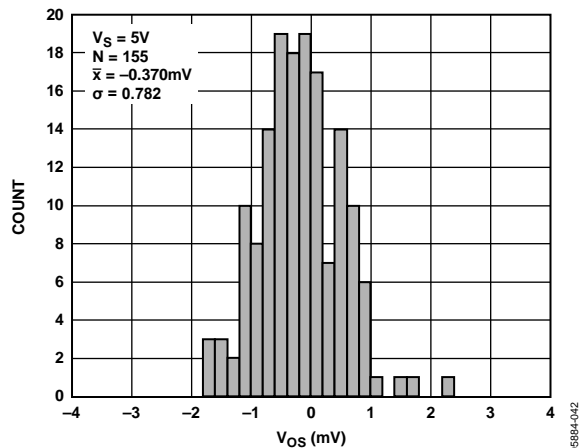


Figure 36.  $V_{OS}$  Distribution



Figure 37.  $V_{OS}$  vs. Common-Mode Voltage

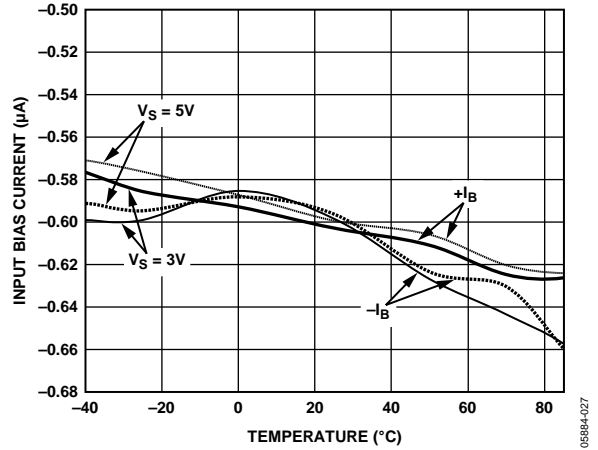


Figure 40. Input Bias Current vs. Temperature

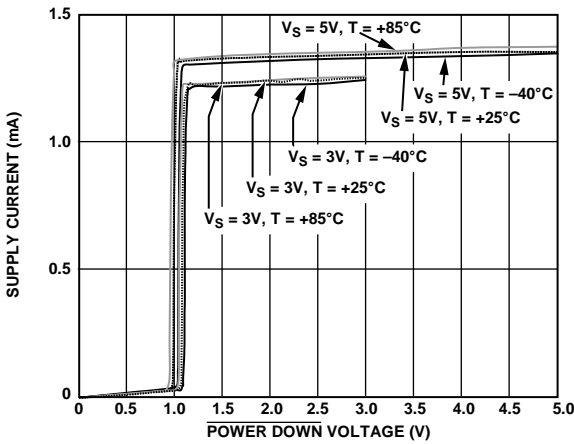


Figure 38. Supply Current vs. POWER DOWN Voltage

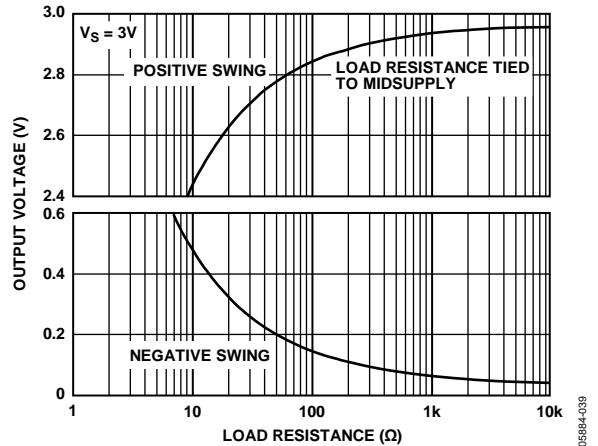


Figure 41. Output Voltage vs. Load Resistance

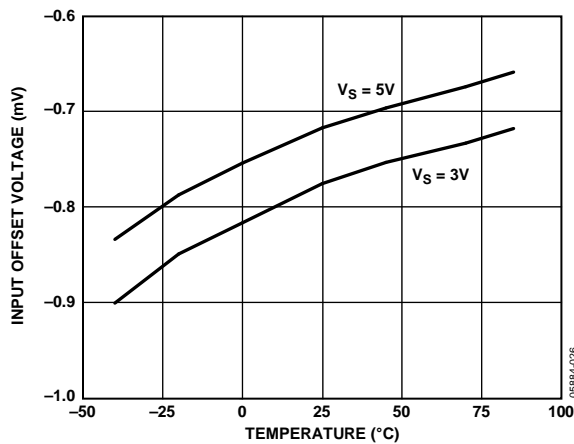


Figure 39. Input Offset Voltage vs. Temperature

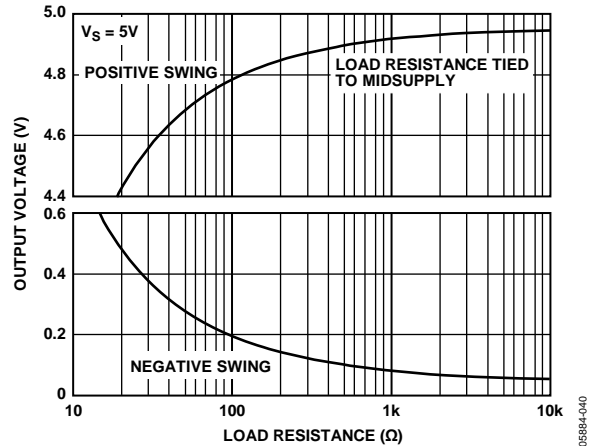


Figure 42. Output Voltage vs. Load Resistance



Figure 43. Output Voltage vs. Load Current



Figure 45. Output Saturation Voltage vs. Temperature for Various Supplies



Figure 44. Output Voltage vs. Load Current



Figure 46. 0.1% Settling Time

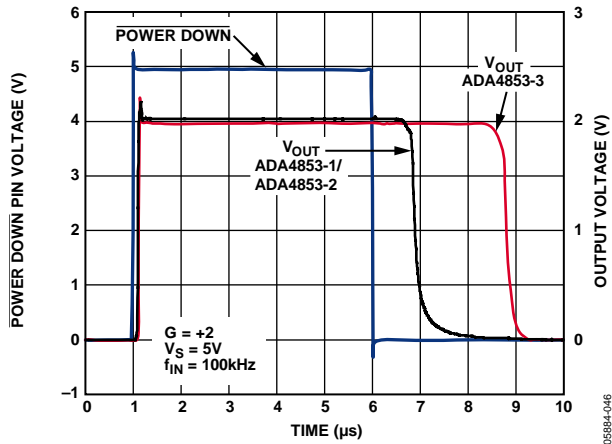


Figure 47. Enable/Disable Time



Figure 49. Input-to-Output Isolation, Chip Disabled



Figure 48. Crosstalk vs. Frequency

# ADA4853-1/ADA4853-2/ADA4853-3

## CIRCUIT DESCRIPTION

The ADA4853-1/ADA4853-2/ADA4853-3 feature a high slew rate input stage that is a true single-supply topology capable of sensing signals at or below the minus supply rail. The rail-to-rail output stage can pull within 100 mV of either supply rail when driving light loads and within 200 mV when driving 150  $\Omega$ . High speed performance is maintained at supply voltages as low as 2.65 V.

## HEADROOM CONSIDERATIONS

The ADA4853-1/ADA4853-2/ADA4853-3 are designed for use in low voltage systems. To obtain optimum performance, it is useful to understand the behavior of the amplifiers as input and output signals approach their headroom limits. The input common-mode voltage range of the amplifier extends from the negative supply voltage (actually 200 mV below this) to within 1.2 V of the positive supply voltage.

Exceeding the headroom limits is not a concern for any inverting gain on any supply voltage, as long as the reference voltage at the positive input of the amplifier lies within the input common-mode range of the amplifier.

The input stage is the headroom limit for signals approaching the positive rail. Figure 50 shows a typical offset voltage vs. the input common-mode voltage for the ADA4853-1/ADA4853-2/ADA4853-3 on a 5 V supply. Accurate dc performance is maintained from approximately 200 mV below the negative supply to within 1.2 V of the positive supply. For high speed signals, however, there are other considerations. As the common-mode voltage gets within 1.2 V of positive supply, the amplifier responds well but the bandwidth begins to drop as the common-mode voltage approaches the positive supply. This can manifest itself in increased distortion or settling time. Higher frequency signals require more headroom than the lower frequencies to maintain distortion performance.

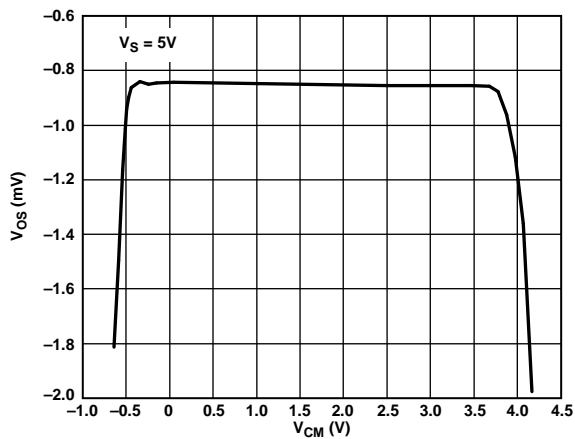


Figure 50.  $V_{OS}$  vs. Common-Mode Voltage,  $V_S = 5$  V

For signals approaching the negative supply, inverting gain, and high positive gain configurations, the headroom limit is the output stage. The ADA4853-1/ADA4853-2/ADA4853-3 use a common-emitter output stage. This output stage maximizes the available output range, limited by the saturation voltage of the output transistors. The saturation voltage increases with the drive current that the output transistor is required to supply due to the collector resistance of the output transistor.

As the saturation point of the output stage is approached, the output signal shows increasing amounts of compression and clipping. For the input headroom case, higher frequency signals require a bit more headroom than the lower frequency signals. Figure 27 illustrates this point by plotting the typical distortion vs. the output amplitude.

## OVERLOAD BEHAVIOR AND RECOVERY

### Input

The specified input common-mode voltage of the ADA4853-1/ADA4853-2/ADA4853-3 is 200 mV below the negative supply to within 1.2 V of the positive supply. Exceeding the top limit results in lower bandwidth and increased rise time. Pushing the input voltage of a unity-gain follower to less than 1.2 V from the positive supply leads to an increasing amount of output error as well as increased settling time. The recovery time from input voltages 1.2 V or closer to the positive supply is approximately 40 ns; this is limited by the settling artifacts caused by transistors in the input stage coming out of saturation.

The amplifiers do not exhibit phase reversal, even for input voltages beyond the voltage supply rails. Going more than 0.6 V beyond the power supplies turns on protection diodes at the input stage, greatly increasing the current draw of the devices.



## APPLICATIONS INFORMATION

### SINGLE-SUPPLY VIDEO AMPLIFIER

With low differential gain and phase errors and wide 0.5 dB flatness, the ADA4853-1/ADA4853-2/ADA4853-3 are ideal solutions for portable video applications. Figure 51 shows a typical video driver set for a noninverting gain of +2, where  $R_F = R_G = 1\text{ k}\Omega$ . The video amplifier input is terminated into a shunt  $75\ \Omega$  resistor. At the output, the amplifier has a series  $75\ \Omega$  resistor for impedance matching to the video load.

When operating in low voltage, single-supply applications, the input signal is only limited by the input stage headroom.

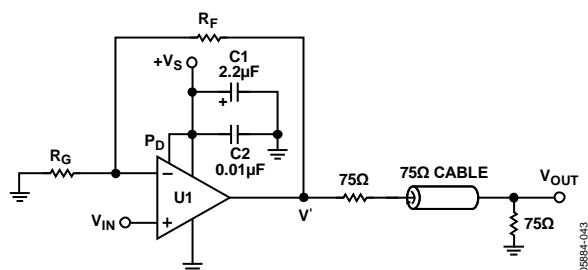


Figure 51. Video Amplifier

### POWER SUPPLY BYPASSING

Attention must be paid to bypassing the power supply pins of the ADA4853-1/ADA4853-2/ADA4853-3. High quality capacitors with low equivalent series resistance (ESR), such as multilayer ceramic capacitors (MLCCs), should be used to minimize supply voltage ripple and power dissipation. A large, usually tantalum,  $2.2\ \mu\text{F}$  to  $47\ \mu\text{F}$  capacitor located in proximity to the ADA4853-1/ADA4853-2/ADA4853-3 is required to provide good decoupling for lower frequency signals. The actual value is determined by the circuit transient and frequency requirements. In addition,  $0.1\ \mu\text{F}$  MLCC decoupling capacitors should be located as close to each of the power supply pins as is physically possible, no more than  $\frac{1}{8}$  inch away. The ground returns should terminate immediately into the ground plane. Locating the bypass capacitor return close to the load return minimizes ground loops and improves performance.

### LAYOUT

As is the case with all high speed applications, careful attention to printed circuit board (PCB) layout details prevents associated board parasitics from becoming problematic. The ADA4853-1/ADA4853-2/ADA4853-3 can operate at up to 100 MHz; therefore, proper RF design techniques must be employed. The PCB should have a ground plane covering all unused portions of the component side of the board to provide a low impedance return path. Removing the ground plane on all layers from the area near and under the input and output pins reduces stray capacitance. Signal lines connecting the feedback and gain resistors should be kept as short as possible to minimize the inductance and stray capacitance associated with these traces. Termination resistors and loads should be located as close as possible to their respective inputs and outputs. Input and output traces should be kept as far apart as possible to minimize coupling (crosstalk) through the board. Adherence to microstrip or stripline design techniques for long signal traces (greater than 1 inch) is recommended. For more information on high speed board layout, go to [www.analog.com](http://www.analog.com) to view *A Practical Guide to High-Speed Printed-Circuit-Board Layout*.

OUTLINE DIMENSIONS




COMPLIANT TO JEDEC STANDARDS MO-203-AB

Figure 52. 6-Lead Thin Shrink Small Outline Transistor Package [SC70] (KS-6)

Dimensions shown in millimeters

072809-A

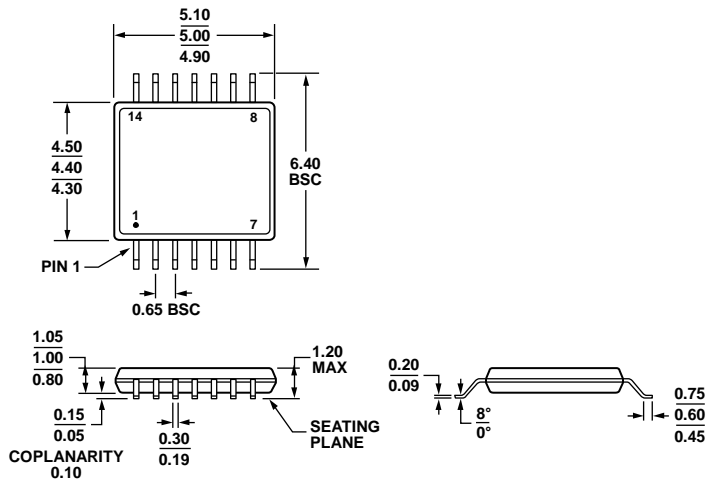

COMPLIANT TO JEDEC STANDARDS MO-153-AB-1

Figure 53. 14-Lead Thin Shrink Small Outline Package [TSSOP] (RU-14)

Dimensions shown in millimeters

061908-A



\*COMPLIANT TO JEDEC STANDARDS MO-220-VEED-2 EXCEPT FOR EXPOSED PAD DIMENSION.

Figure 54. 16-Lead Lead Frame Chip Scale Package [LFCSP\_VQ]  
3 mm x 3 mm Body, Very Thin Quad (CP-16-3)  
Dimensions shown in millimeters

07-172006-A

**ORDERING GUIDE**

| Model <sup>1,2</sup> | Temperature Range | Package Description  | Ordering Quantity | Package Option | Branding |
|----------------------|-------------------|--|-------------------|----------------|----------|
| ADA4853-1AKSZ-R2     | -40°C to +85°C    | 6-Lead Thin Shrink Small Outline Transistor Package (SC70) | 250               | KS-6           | HEC      |
| ADA4853-1AKSZ-R7     | -40°C to +85°C    | 6-Lead Thin Shrink Small Outline Transistor Package (SC70) | 3000              | KS-6           | HEC      |
| ADA4853-1AKSZ-RL     | -40°C to +85°C    | 6-Lead Thin Shrink Small Outline Transistor Package (SC70) | 10,000            | KS-6           | HEC      |
| ADA4853-1AKS-EBZ     |                   | Evaluation Board   | 1                 |                |          |
| ADA4853-2YCPZ-R2     | -40°C to +105°C   | 16-Lead Lead Frame Chip Scale Package (LFCSP_VQ)           | 250               | CP-16-3        | H0H      |
| ADA4853-2YCPZ-RL     | -40°C to +105°C   | 16-Lead Lead Frame Chip Scale Package (LFCSP_VQ)           | 5000              | CP-16-3        | H0H      |
| ADA4853-2YCPZ-RL7    | -40°C to +105°C   | 16-Lead Lead Frame Chip Scale Package (LFCSP_VQ)           | 1500              | CP-16-3        | H0H      |
| ADA4853-2YCP-EBZ     |                   | Evaluation Board   | 1                 |                |          |
| ADA4853-3YCPZ-R2     | -40°C to +105°C   | 16-Lead Lead Frame Chip Scale Package (LFCSP_VQ)           | 250               | CP-16-3        | H0L      |
| ADA4853-3YCPZ-RL     | -40°C to +105°C   | 16-Lead Lead Frame Chip Scale Package (LFCSP_VQ)           | 5000              | CP-16-3        | H0L      |
| ADA4853-3YCPZ-R7     | -40°C to +105°C   | 16-Lead Lead Frame Chip Scale Package (LFCSP_VQ)           | 1500              | CP-16-3        | H0L      |
| ADA4853-3WYCPZ-R7    | -40°C to +105°C   | 16-Lead Lead Frame Chip Scale Package (LFCSP_VQ)           | 1500              | CP-16-3        | H2H      |
| ADA4853-3YCP-EBZ     |                   | Evaluation Board   |                   |                |          |
| ADA4853-3YRUZ        | -40°C to +105°C   | 14-Lead Thin Shrink Small Outline Package (TSSOP)          | 96                | RU-14          |          |
| ADA4853-3YRUZ-RL     | -40°C to +105°C   | 14-Lead Thin Shrink Small Outline Package (TSSOP)          | 2500              | RU-14          |          |
| ADA4853-3YRUZ-R7     | -40°C to +105°C   | 14-Lead Thin Shrink Small Outline Package (TSSOP)          | 1000              | RU-14          |          |
| ADA4853-3YRU-EBZ     |                   | Evaluation Board   | 1                 |                |          |

<sup>1</sup> Z = RoHS Compliant Part.

<sup>2</sup> W = Qualified for Automotive Applications.

**AUTOMOTIVE PRODUCTS**

The ADA4853-3W model is available with controlled manufacturing to support the quality and reliability requirements of automotive applications. Note that these automotive models may have specifications that differ from the commercial models; therefore, designers should review the Specifications section of this data sheet carefully. Only the automotive grade products shown are available for use in automotive applications. Contact your local Analog Devices account representative for specific product ordering information and to obtain the specific Automotive Reliability reports for these models.

NOTES

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)  
Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)