

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

[0736510333](#)

Status:

Active

Overview:

[hdm](#)

Description:

2.00mm (.079") Pitch HDM® Board-to-Board Daughterboard Power Module, Right Angle, SMC, 3-Blade Module, 3 Circuits

Documents:

[3D Model](#)

[Drawing \(PDF\)](#)

[Packaging Specification \(PDF\)](#)

[RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

CSA

LR19980

UL

E29179

General

Product Family

Backplane Connectors

Series

[73651](#)

Application

Daughtercard

Component Type

Power Receptacle

Overview

[hdm](#)

Product Name

HDM®

Style

N/A

Physical

Circuits (Loaded)

3

Circuits (maximum)

3

Color - Resin

Black

Durability (mating cycles max)

250

First Mate / Last Break

No

Flammability

94V-0

Guide to Mating Part

No

Keying to Mating Part

None

Material - Metal

High Performance Alloy (HPA)

Material - Plating Mating

Gold

Material - Plating Termination

Tin

Material - Resin

High Temperature Thermoplastic

Number of Columns

1

Number of Pairs

Open Pin Field

Number of Rows

3

Orientation

Right Angle

PC Tail Length (in)

0.079 In

PC Tail Length (mm)

2.00 mm

PCB Locator

Yes

PCB Retention

None

PCB Thickness Recommended (in)

0.062 In

PCB Thickness Recommended (mm)

1.60 mm

Packaging Type

Tube

Pitch - Mating Interface (in)

0.157 In

Pitch - Mating Interface (mm)

4.00 mm

Pitch - Term. Interface (in)

0.118 In

Pitch - Term. Interface (mm)

3.00 mm

Plating min: Mating (µin)

30

Plating min: Mating (µm)

0.75

Plating min: Termination (µin)


100

Plating min: Termination (µm)

2.5

Polarized to PCB

No

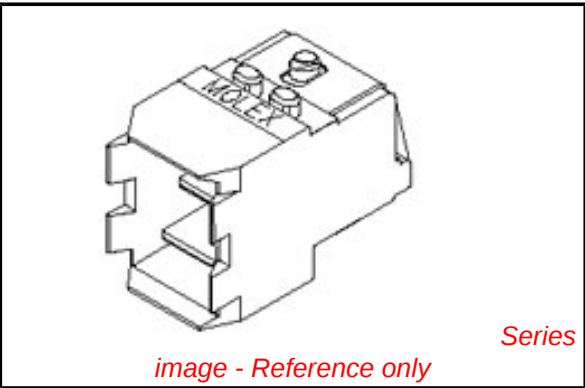

EU RoHS

ELV and RoHS

Compliant

REACH SVHC

Not Reviewed

Halogen-Free

Status

Not Reviewed

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com

For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

[73651Series](#)

Mates With

[73656](#) HDM® Board-to-Board Backplane Power Module

Stackable	No
Surface Mount Compatible (SMC)	No
Temperature Range - Operating	-55°C to +105°C
Termination Interface: Style	Through Hole

Electrical

Current - Maximum per Contact	15A
Data Rate	1.0 Gbps
Real Signals (per 25mm)	19
Shielded	No
Voltage - Maximum	500V

Material Info





Reference - Drawing Numbers

Packaging Specification	PK-70873-0820
Sales Drawing	SDA-73651-****

HDM and High Density Metric are trademarks of Amphenol Corporation

This document was generated on 05/14/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

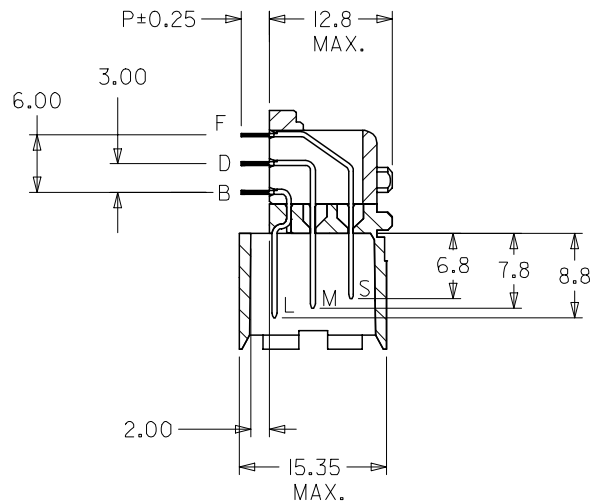

NOTES:

1. MATERIALS:

HOUSING - LIQUID CRYSTAL POLYMER (LCP), GLASS-FILLED, UL 94V-0,
COLOR BLACK

TERMINAL - COPPER ALLOY

2. FINISH:

ASSEMBLIES WITH PRESSFIT TAILS:

0.76 MINIMUM SELECTIVE GOLD (Au) IN CONTACT AREA,

SELECTIVE TIN/LEAD (Sn/Pb) ON PC TAILS

OVER NICKEL (Ni) UNDERPLATE OVERALL.

ASSEMBLIES WITH SOLDER TAILS:

0.76 MINIMUM SELECTIVE GOLD (Au) IN CONTACT AREA,

SELECTIVE TIN (Sn) ON PC TAILS


OVER NICKEL (Ni) UNDERPLATE OVERALL.

3. THIS PART CONFORMS TO MOLEX PRODUCT SPECIFICATION PS-73670-9999.

4. THIS DIMENSION MUST BE A MULTIPLE OF 4.00mm.

5. DIMENSIONS ARE IN MILLIMETERS AND ARE FOR LAYOUT PURPOSES ONLY.

6. DIMENSIONS AND TOLERANCES SUBJECT TO CHANGE WITHOUT NOTICE.

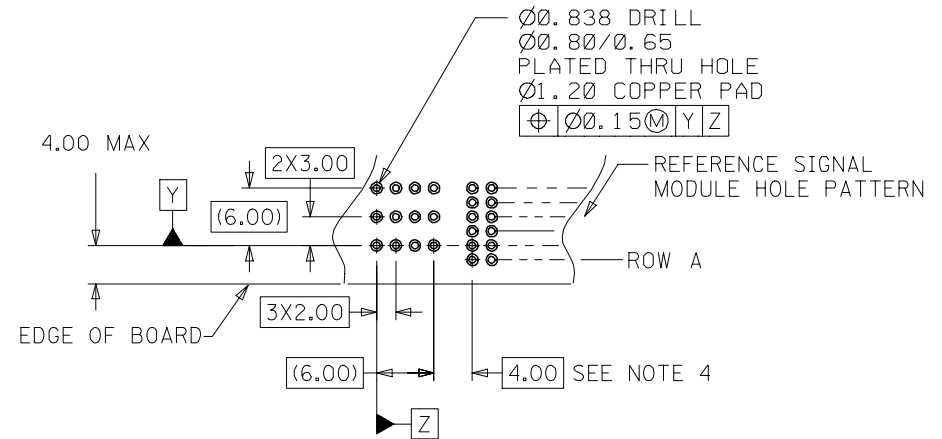

PCB LAYOUT: COMPONENT SIDE
RECOMMENDED PCB THICKNESS: 1.60 MIN
(FOR SOLDER TAIL AND PRESS FIT)

MODIFY FINISH EC NO: UCP2007-1348 DRWN:MSI BARRA 2006/12/29 CHKD:BBARKER 2007/01/04 APPR:SMILLER 2007/01/05 REV	DESCRIPTION	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 2:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE B		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		

MATERIAL NUMBER ASSIGNMENT

TAIL TYPE
0 = SOLDER
1 = PRESS FIT

73651- * * * *

PC TAIL LENGTH

CODE	DIM "P"
0	= 2.00
1	= 2.50
2	= 3.00
3	= 3.50
4	= 4.00
5	= 2.75


PRESSFIT TAILS
AVAILABLE IN
THESE LENGTHS
ONLY

MATING LENGTH


10 = SSS	20 = MSS	30 = LSS
11 = SSM	21 = MSM	31 = LSM
12 = SSL	22 = MSL	32 = LSL
13 = SMS	23 = MMS	33 = LMS
14 = SMM	24 = MMM	34 = LMM
15 = SML	25 = MML	35 = LML
16 = SLS	26 = MLS	36 = LLS
17 = SLM	27 = MLM	37 = LLM
18 = SLL	28 = MLL	38 = LLL

DIM. "P" ±0.25


MATING LENGTH EXAMPLES




73651-XX10
TYPE SSS




73651-XX16
TYPE SLS




73651-XX25
TYPE MML




73651-XX27
TYPE MLM




73651-XX33
TYPE LMS




73651-XX38
TYPE LLL




73651-XX34
TYPE LMM



73651-XX35
TYPE LML



73651-XX36
TYPE LLS



73651-XX30
TYPE LSS

UPDATE BORDER EC NO: UCP2007-1348 TIDRW:MSI:BARRA 2006/12/29 CHKD:BARKER 2007/01/04 APPR:SMILLER 2007/01/05	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED) <table border="1"> <tr> <th></th> <th>mm</th> <th>INCH</th> </tr> <tr> <td>4 PLACES</td> <td>± ---</td> <td>± ---</td> </tr> <tr> <td>3 PLACES</td> <td>± ---</td> <td>± ---</td> </tr> <tr> <td>2 PLACES</td> <td>± 0.10</td> <td>± ---</td> </tr> <tr> <td>1 PLACE</td> <td>± 0.25</td> <td>± ---</td> </tr> <tr> <td colspan="3">ANGULAR ±1/2°</td> </tr> </table>		mm	INCH	4 PLACES	± ---	± ---	3 PLACES	± ---	± ---	2 PLACES	± 0.10	± ---	1 PLACE	± 0.25	± ---	ANGULAR ±1/2°			DIMENSION STYLE MM ONLY	SCALE 2:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION
		mm	INCH																					
	4 PLACES	± ---	± ---																					
	3 PLACES	± ---	± ---																					
2 PLACES	± 0.10	± ---																						
1 PLACE	± 0.25	± ---																						
ANGULAR ±1/2°																								
		DRAWN BY JRP	DATE 1997/07/22	TITLE SALES ASSEMBLY HDM DAUGHTERCARD POWER MODULE																				
		CHECKED BY PAR	DATE 1996/07/22	MOLEX INCORPORATED																				
		APPROVED BY CAB	DATE 1996/07/22	MATERIAL NO. SEE CHART	DOCUMENT NO. SDA-73651-****	SHEET NO. 2 OF 2																		

MATERIAL NUMBER ASSIGNMENT

TAIL TYPE

0 = SOLDER
1 = PRESS FIT

73651- * * * *

PC TAIL LENGTH

CODE	DIM "P"
0	= 2.00
1	= 2.50
2	= 3.00
3	= 3.50
4	= 4.00
5	= 2.75


PRESSFIT TAILS
AVAILABLE IN
THESE LENGTHS
ONLY

MATING LENGTH


10 = SSS	20 = MSS	30 = LSS
11 = SSM	21 = MSM	31 = LSM
12 = SSL	22 = MSL	32 = LSL
13 = SMS	23 = MMS	33 = LMS
14 = SMM	24 = MMM	34 = LMM
15 = SML	25 = MML	35 = LML
16 = SLS	26 = MLS	36 = LLS
17 = SLM	27 = MLM	37 = LLM
18 = SLL	28 = MLL	38 = LLL

DIM. "P" ±0.25


MATING LENGTH EXAMPLES




73651-XX10
TYPE SSS




73651-XX16
TYPE SLS




73651-XX25
TYPE MML




73651-XX27
TYPE MLM




73651-XX33
TYPE LMS




73651-XX38
TYPE LLL




73651-XX34
TYPE LMM



73651-XX35
TYPE LML



73651-XX36
TYPE LLS



73651-XX30
TYPE LSS

DIMENSIONS SHOWN (METRIC) INCH

UNLESS OTHERWISE SPECIFIED
TOLERANCES: ANGULAR ± 1/2°

	INCH	METRIC
3 PLACE	± N/A	---
2 PLACE	± N/A	± ---
1 PLACE	---	± ---

DRAFT WHERE APPLICABLE MUST
REMAIN WITHIN DIMENSIONS

DRWG. BY JRR CHK'D. BY SMR
APP'D. BY CAB SCALE 2 : 1

▽ = 0
▼ = 0

REVISE ONLY ON CAD SYSTEM

TITLE

SALES ASSY, HDM DAUGHTER
CARD POWER MODULE

FILE NAME

SEE CHART

SDA-73651-*****

PART NO.

DRWG. NO.

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.

DGN

DA

B

SIZE

DA

B

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru