


## Features

- Patent #6,327,129
- Balanced TRIGARD®
-  Listed per UL 497 (File: 53117)
- Reliability is improved by elimination of the air Back-Up-Gap (BUG)
- Multi-Stage Protection (MSP®)
- Quick response
- High current handling
- Compact, industry standard footprint
- Meets test requirements of Telcordia GR 974, GR1361, SR 5165 and RUS PE-80
- Telcordia Analysis report DA-1843

## 155HS Series Digi.Guard II - MSP® Heavy Duty Station Protector

Bourns® Model 155HS Digi.Guard II Multi-Stage Protector is a new generation telecommunications Station Protector designed to be the best all around choice for protecting copper pair voice-band and high speed data circuits. Combining the strengths of Gas Tube and solid-state protectors, the Model 155HS integrates three advanced protection technologies: a proprietary sixth-generation Gas Tube, a precision matched metal oxide varistor and a patented Switch-Grade Fail-Short mechanism.

Bourns® 2378-35 can be used universally for POTS and high speed data, e.g. ISDN, ADSL, ADSL2+, VDSL, VDSL2, other xDSL protocols and high speed Ethernet. Bourns® MSP® technology provides unparalleled overvoltage protection with low loss on paired copper communications circuits. The Model 155 is the most economical, reliable and best performing choice for overvoltage protection of paired copper communications circuits.

### Characteristics

Test Methods per IEEE C62.31, UL 497, Telcordia GR-1361, applicable sections of Telcordia GR 974. UL Listed.

DC Breakdown .....	300-400 V
AC Breakdown, 60 Hz .....	300-400 V
Impulse Breakdown	
100 V/ $\mu$ s .....	600 V
1000 V/ $\mu$ s .....	650 V
Insulation Resistance @ 100 Vdc .....	>1 G $\Omega$
Insertion Loss @ 100 MHz .....	<0.4 dB (Category 5)
Return Loss @ 100 MHz .....	>14 dB (Category 5)
Capacitance Line to Line @ 1 MHz .....	10 pF typical
Capacitance Line to Ground @ 1 MHz .....	20 pF typical
Impulse Reset1 (DC Extinguishing)	
52 V, 260 mA .....	<10 ms <sup>3</sup>
135 V, 200 mA .....	<10 ms <sup>3</sup>
150 V, 200 mA .....	<150 ms
Impulse Life Characteristics (Per-Side, Simultaneously)	
100 A, 10/1000 $\mu$ s .....	>3000 operations
300 A, 10/1000 $\mu$ s .....	>1000 operations
500 A, 10/1000 $\mu$ s .....	>1000 operations
2,000 A, 10/250 $\mu$ s .....	>100 operations
5,000 A, 20/100 $\mu$ s .....	>10 operations
20,000 A, 8/20 $\mu$ s .....	>10 operations <sup>4</sup>
AC Life Characteristics	
0.5 A rms continuous .....	>30 seconds
1 A rms, 1 second, 600 ft. cable .....	>60 seconds
1 A rms, 1 second, 1 mile cable .....	>60 operations
10 A rms, 1 second .....	>20 operations
65 A rms, 11 cycles .....	>1 operation <sup>4</sup>
120 A rms, 0.1 second .....	>1 operation
Life Test Criteria	
Insulation Resistance Throughout the Life Test .....	100 M $\Omega$
Life Test Failures .....	0.0 %
Failures During Environmental Cycling w/ surges .....	0.0 %
Failshort (vented or non-vented gas tube) .....	>30 Arms, simultaneous
Operating Temperature .....	-55 to +85 °C

### Notes:

- <sup>1</sup> Network Applied
- <sup>2</sup> Exceeds Telcordia 1361
- <sup>3</sup> Surpasses Telcordia GR 974
- <sup>4</sup> RUS (REA) PE-80

Line to Line voltage is approximately 1.8 to 2 times the stated Line to Ground breakdown voltage.

Specifications are subject to change without notice.

The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time. Users should verify actual device performance in their specific applications.

# 155HS Series Digi.Guard II - MSP® Heavy Duty Station Protector

**BOURNS®**


## How To Order

Model 155HS-MSP ..... Part # 2378-35-HS  
 Model 155HS-BC\* ..... Part # 2378-35-BC\*


Model 155HS-BC should be used on DSL systems that require Tip-to-Ground and Ring-to-Ground capacitive balance of  $\leq 1$  pF.

## Product Dimensions

### 2378-35-HS

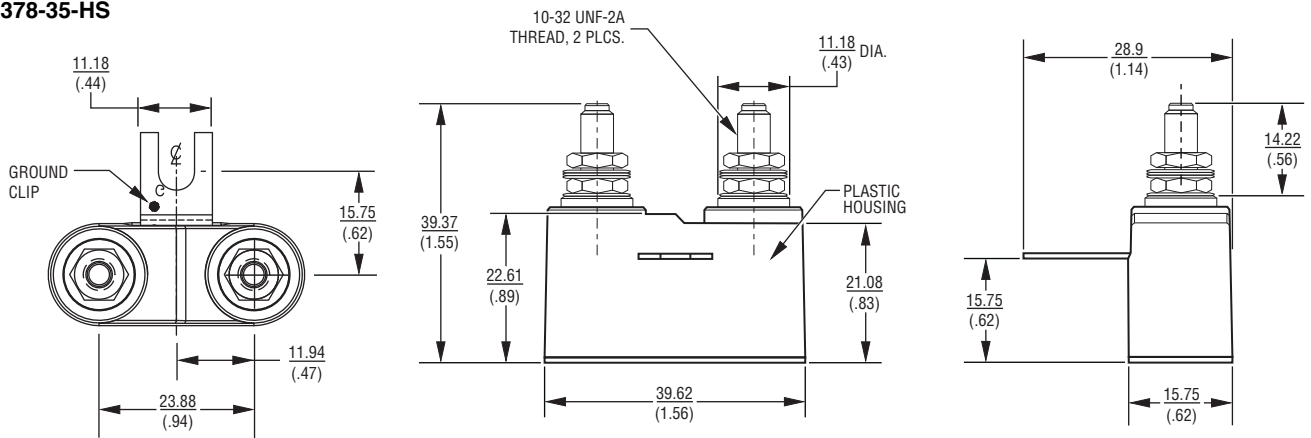

### 2372-02 Ground Mounting Stud (order separately)

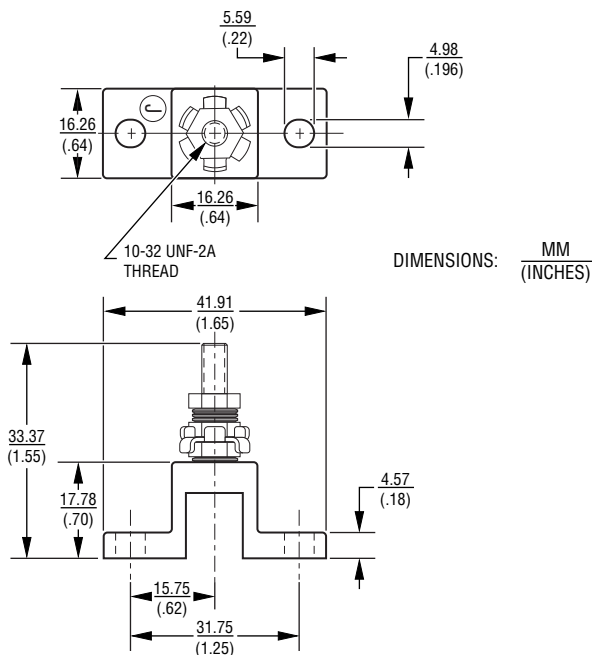

DIMENSIONS:  $\frac{\text{MM}}{\text{(INCHES)}}$

**BOURNS®**

#### Asia-Pacific:

Tel: +886-2 2562-4117  
 Fax: +886-2 2562-4116

#### EMEA:

Tel: +36 88 520 390  
 Fax: +36 88 520 211

#### The Americas:

Tel: +1-951 781-5500  
 Fax: +1-951 781-5700

[www.bourns.com](http://www.bourns.com)

REV. L 03/15

"MSP" and "TRIGARD" are registered trademarks of Bourns, Inc. Specifications are subject to change without notice. The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time. Users should verify actual device performance in their specific applications.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)