

## Low Profile, Configurable Power Solution

### Features

- DC input: 28 Vdc
- Output voltages:  
3.3 – 48 Vdc  
40 – 400 W total  
1, 2, or 3 outputs
- Protective features:  
Inrush current limiting  
Input transient protection:  
– per MIL-STD-704E/F (M-FIAM5B)  
– per MIL-STD-704A/E/F &  
MIL-STD-1275A/B/D (M-FIAM9)  
EMI filtering per MIL-STD-461E
- Local or remote control
- Compliant to MIL-STD-810F for  
vibration (Method 514.5, Procedure I)  
and shock (Method 516.5, Procedure I)  
Module environmental stress screening
- Package style:  
Low profile mounting options  
Optional finned heat sink


### Product Highlights

The 28 Vdc MIL-COTS VIPAC family of power systems is a new class of user-defined, modular power solutions for the most demanding military applications. It incorporates preassembled and tested front ends (M-FIAM5B or M-FIAM9), Vicor Maxi, Mini and Micro series DC-DC converters (H or M-Grade), a choice of output connections and mechanical platforms. The 28 Vdc VIPAC can be specified with 1, 2 or 3 outputs with voltages as low as 3.3 Vdc to as high as 48 Vdc and power levels from 40 to 400 W per output. Additionally, the wide trim range of the modules can provide operating voltages from 500 mv to 52.8 V. The MIL VIPAC is available with an input of 28 Vdc in a variety of packages with profiles as low as 0.75".

For additional technical or design information; or to create a 28 Vdc VIPAC tailored to your specific requirements using Vicor's online configurator, please visit [vicorpower.com](http://vicorpower.com).




### Configurations




#### 3 Micros (MVC-Axxx, MVX-Axxx)

- 4.96" x 6.8" (126,0 x 172,7 mm)
- Dual or triple output
- Up to 300 W
- 1.4 lbs (640 g)




#### 2 Minis (MVC-Bxxx, MVX-Bxxx)

- 4.96" x 6.8" (126,0 x 172,7 mm)
- Single or dual output
- Up to 400 W
- 1.4 lbs (640 g)



#### 1 Micro (MVC-Gxxx, MVX-Gxxx)

- 3.15" x 6.8" (80,0 x 172,7 mm)
- Single output
- Up to 100 W
- 0.9 lbs (411 g)



#### 2 Micros (MVC-Dxxx, MVX-Dxxx)

- 3.15" x 6.8" (80,0 x 172,7 mm)
- Single or dual output
- Up to 200 W
- 1.0 lbs (457 g)



#### 1 Mini (MVC-Exxx, MVX-Exxx)

- 3.15" x 6.8" (80,0 x 172,7 mm)
- Single output
- Up to 200 W
- 1.0 lbs (457 g)



#### 1 Maxi (MVC-Fxxx, MVX-Fxxx)

- 3.15" x 9.15" (80,0 x 234,4 mm)
- Single output
- Up to 400 W
- 1.3 lbs (594 g)

Note: Weights are for coldplate versions • MVC-xxx refers to M-FIAM5B • MVX-xxx refers to M-FIAM9

## MIL VIPAC GENERAL SPECIFICATIONS

Typical at 25 °C, nominal line and load, unless otherwise specified.

### ■ INPUT SPECIFICATIONS

| Parameter                     | Min | Typ                        | Max   | Unit | Notes                                                                                                                        |
|-------------------------------|-----|----------------------------|-------|------|------------------------------------------------------------------------------------------------------------------------------|
| Input voltage                 | 18  | 28                         | 36    | Vdc  | Continuous                                                                                                                   |
| Inrush limiting               |     |                            | 0.007 | A/μF |                                                                                                                              |
| Transient immunity (M-FIAM5B) |     |                            | 50    | Vdc  | 12.5 ms per MIL-STD-704E/F, continuous operation<br>Test conditions AA and FF normal overvoltage transients per MIL-HDBK-704 |
| Transient immunity (M-FIAM9)  |     |                            | 100   | Vdc  | 50 ms per MIL-STD-1275A/B/D, continuous operation                                                                            |
|                               |     |                            | 250   | Vdc  | 70 μs per MIL-STD-1275A/B/D, continuous operation                                                                            |
|                               |     |                            | 70    | Vdc  | 20 ms per MIL-STD-704A, continuous operation                                                                                 |
|                               |     |                            | 50    | Vdc  | 12.5 ms per MIL-STD-704E/F, continuous operation                                                                             |
| EMI                           |     | MIL-STD-461E               |       |      |                                                                                                                              |
| Conducted emissions           |     | CE101, CE102*              |       |      |                                                                                                                              |
| Conducted susceptibility      |     | CS101, CS114, CS115, CS116 |       |      |                                                                                                                              |

\*CE102 compliant with loads in excess of 30% of rated output; loads below 30% may need additional input capacitance for compliance.

### ■ ENVIRONMENTAL - SYSTEM

| Parameter                               | Min       | Typ | Max | Unit     | Notes                               |
|-----------------------------------------|-----------|-----|-----|----------|-------------------------------------|
| Dielectric withstand, input to chassis  | 1500/2121 |     |     | Vrms/Vdc |                                     |
| Operating chassis temperature           |           |     |     |          |                                     |
| H-Grade                                 | -40       |     | 95  | °C       |                                     |
| M-Grade                                 | -55       |     | 95  | °C       |                                     |
| Storage temperature                     |           |     |     |          |                                     |
| H-Grade                                 | -55       |     | 125 | °C       |                                     |
| M-Grade                                 | -65       |     | 125 | °C       |                                     |
| Shock                                   |           |     |     |          |                                     |
| MIL-STD-810F, Method 516.5, Procedure I |           |     |     |          | 40 g for 15-23 ms, 75 g for 8-13 ms |
| Vibration                               |           |     |     |          |                                     |
| MIL-STD-810F, Method 514.5, Procedure I |           |     |     |          | 20-2000 Hz at 5 g                   |

### ■ OUTPUT SPECIFICATIONS

| Parameter                 | Min | Typ    | Max    | Unit       | Notes                                                                                                      |
|---------------------------|-----|--------|--------|------------|------------------------------------------------------------------------------------------------------------|
| Output voltage setpoint   |     |        | ±1     | %          | Vout nom                                                                                                   |
| Line regulation           |     | ±0.02  | ±0.2   | %          | Low line to high line; full load                                                                           |
| Temperature regulation    |     | ±0.002 | ±0.005 | %/°C       | Over operating temperature range                                                                           |
| Over temperature shutdown |     | 115    |        | °C         |                                                                                                            |
| Power sharing accuracy    |     | ±2     | ±5     | %          |                                                                                                            |
| Programming range         | 10  |        | 110    | %          | Of nominal voltage. (For trimming below 90% of nominal, a minimum load of 10% rated power may be required) |
| Current limit             |     | 115    |        | % Iout max | Output voltage 95% of nominal                                                                              |
| Short circuit current     |     | 115    |        | % Iout max | Output voltage <250 mV                                                                                     |

# MIL VIPAC SPECIFIC SPECIFICATIONS

## ■ ENVIRONMENTAL - MODULES

### Altitude

MIL-STD-810C, Method 500.2, Procedure I & II, 40,000 ft. and 70,000 ft. Operational.

### Explosive Atmosphere

MIL-STD-810F, Method 511.4, Procedure I, Operational.

### Vibration

MIL-STD-810F, Method 514.5, Procedure I, Category 14, Sine and Random vibration per Table 514.5C for Helicopter AH-6J Main Rotor with overall level of 5.6 grams for 4 hours per axis. MIL-STD-810F, Method 514.5C, General Minimum Integrity Curve per Figure 514.5C-17 with overall level of 7.7 grams for 1 hour per axis.

### Shock

MIL-STD-810-F, Method 516.5, Procedure I, Functional Shock, 40 G's. MIL-S-901D, Lightweight Hammer Shock, 3 impacts/axis, 1,3,5 ft. MIL-STD-202F, Method 213B, 60 G's, 9ms half sine. MIL-STD-202F, Method 213B, 75 G's, 11ms Saw Tooth Shock.

### Acceleration

MIL-STD-810F, Method 513.5, Procedure II, Table 513.5-II, Operational, 2-7 G's, 6 directions.

### Humidity

MIL-STD-810F, Method 507.4, Procedure I, Cycle I, 240 hrs, 95% RH.

### Solder Test

MIL-STD-202F, Method 208, 8 hour aging.


## ■ MIL-COTS 28 Vdc VIPAC OUTPUT POWER OPTIONS (Output power based on 28 Vdc nominal input voltage)

| VIPAC Configuration       | No. of Outputs | Power (W) |     |      |      |      |      |      | Total <sup>2</sup> |
|---------------------------|----------------|-----------|-----|------|------|------|------|------|--------------------|
|                           |                | 3.3 V     | 5 V | 12 V | 15 V | 24 V | 28 V | 48 V |                    |
| Single micro <sup>1</sup> | Single         | 75        | 100 | 100  | 100  | 100  | 100  | 100  | 100                |
|                           | Single //      | 150       | 200 | 200  | 200  | 200  | 200  | 200  | 200                |
| Dual micro <sup>1</sup>   | Dual           | 75        | 100 | 100  | 100  | 100  | 100  | 100  | 200                |
|                           |                |           | 75  | 100  | 100  | 100  | 100  | 100  | 100                |
| Triple micro <sup>1</sup> | Dual           | 150       | 200 | 200  | 200  | 200  | 200  | 200  | 300                |
|                           |                | 75        | 100 | 100  | 100  | 100  | 100  | 100  |                    |
|                           | Triple         | 75        | 100 | 100  | 100  | 100  | 100  | 100  | 300                |
|                           |                | 75        | 100 | 100  | 100  | 100  | 100  | 100  |                    |
|                           |                | 75        | 100 | 100  | 100  | 100  | 100  | 100  |                    |
| Single mini <sup>1</sup>  | Single         | 150       | 200 | 200  | 200  | 200  | 200  | 200  | 200                |
| Dual mini <sup>1</sup>    | Single //      | 300       | 400 | 400  | 400  | 400  | 400  | 400  | 400                |
|                           | Dual           | 150       | 200 | 200  | 200  | 200  | 200  | 200  | 400                |
|                           |                | 150       | 200 | 200  | 200  | 200  | 200  | 200  |                    |
| Maxi <sup>1</sup>         | Single         | 264       | 400 | 400  | 400  | 400  | 400  | 400  | 400                |

// = parallel

<sup>1</sup> Lower power modules available – consult website for more information.

<sup>2</sup> Derate output power per chart below.

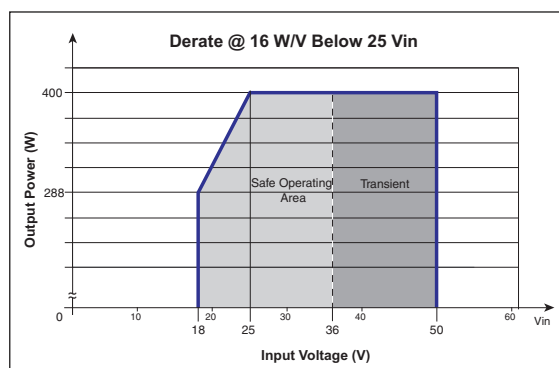

28 V MIL-COTS VIPAC Derating Curve

## MIL VIPAC SPECIFIC SPECIFICATIONS (CONT.)

### ■ MICRO MODULES

| Parameter                  | 3.3 V | 5 V  | 12 V | 15 V | 24 V | 28 V | 48 V | Unit   | Notes                                    |
|----------------------------|-------|------|------|------|------|------|------|--------|------------------------------------------|
| Efficiency (typ)           | 79    | 84   | 85.8 | 89   | 88   | 89   | 87.7 | %      |                                          |
| Ripple & noise, p-p (typ)  | 140   | 100  | 209  | 100  | 70   | 85   | 100  | mV     | 20 MHz bandwidth                         |
| Output power               | 75    | 100  | 100  | 100  | 100  | 100  | 100  | Watts  | 95 °C Chassis                            |
| Output OVP setpoint        | 4.3   | 6.25 | 14.3 | 17.8 | 28.1 | 32.7 | 55.7 | Volts  | Recycle input volt. to restart (1 m off) |
| Dissipation, standby (typ) | 4     | 3.2  | 4.4  | 4.6  | 3.6  | 3.3  | 3    | Watts  | No load                                  |
| Load reg. (max)            | 0.02  | 0.02 | 0.02 | 0.02 | 0.02 | 0.02 | 0.02 | ±%Vout | No load to full load                     |

Note: 50 W Micro models are now available.

### ■ MINI MODULES

| Parameter                  | 3.3 V | 5 V  | 12 V | 15 V | 24 V | 28 V | 48 V | Unit   | Notes                                    |
|----------------------------|-------|------|------|------|------|------|------|--------|------------------------------------------|
| Efficiency (typ)           | 79    | 82.5 | 86   | 86.6 | 87   | 87   | 87.5 | %      |                                          |
| Ripple & noise, p-p (typ)  | 100   | 95   | 360  | 250  | 260  | 180  | 225  | mV     | 20 MHz bandwidth                         |
| Output power               | 150   | 200  | 200  | 200  | 200  | 200  | 200  | Watts  | 95 °C Chassis                            |
| Output OVP setpoint        | 4.3   | 6.3  | 14.4 | 17.8 | 28.5 | 32.8 | 55.8 | Volts  | Recycle input volt. to restart (1 m off) |
| Dissipation, standby (typ) | 5     | 5.1  | 4.6  | 3.4  | 5.1  | 4.5  | 5.4  | Watts  | No load                                  |
| Load reg. (max)            | 0.02  | 0.02 | 0.02 | 0.02 | 0.02 | 0.02 | 0.02 | ±%Vout | No load to full load                     |

### ■ MAXI MODULES


| Parameter                  | 3.3 V | 5 V  | 12 V | 15 V | 24 V | 28 V | 48 V | Unit   | Notes                                    |
|----------------------------|-------|------|------|------|------|------|------|--------|------------------------------------------|
| Efficiency (typ)           | 78.5  | 82   | 86.8 | 87.5 | 88.5 | 87.8 | 86.7 | %      |                                          |
| Ripple & noise, p-p (typ)  | 75    | 152  | 70   | 60   | 80   | 172  | 58   | mV     | 20 MHz bandwidth                         |
| Output power               | 264   | 400  | 400  | 400  | 400  | 400  | 400  | Watts  | 95 °C Chassis                            |
| Output OVP setpoint        | 4.3   | 6.25 | 14.3 | 17.8 | 28.1 | 32.7 | 55.8 | Volts  | Recycle input volt. to restart (1 m off) |
| Dissipation, standby (typ) | 8     | 6.8  | 6.8  | 6.3  | 11   | 6.3  | 11.8 | Watts  | No load                                  |
| Load reg. (max)            | 0.02  | 0.02 | 0.02 | 0.02 | 0.02 | 0.02 | 0.02 | ±%Vout | No load to full load                     |

Note: 300 W (200 W @ 3.3V) Maxi models are also available.

# MECHANICAL DRAWINGS


**Configuration MVC-A / MVX-A**

**LugMates**

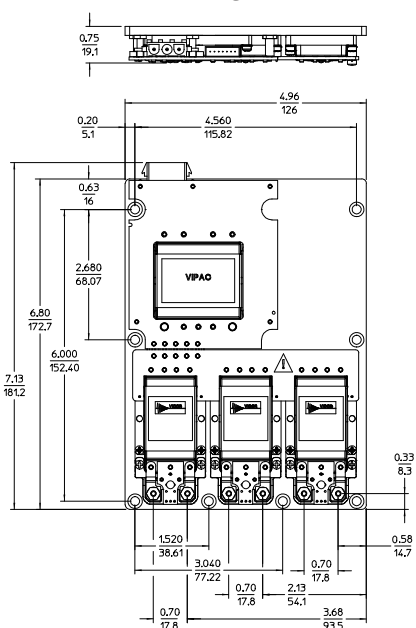


**Configuration MVC-B / MVX-B**

**LugMates**

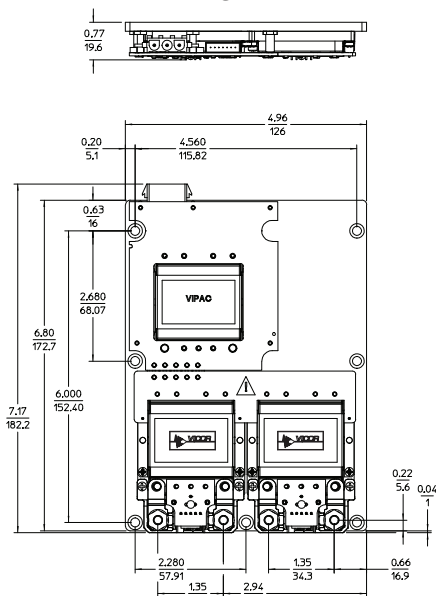


**Configuration MVC-D / MVX-D**

**LugMates**

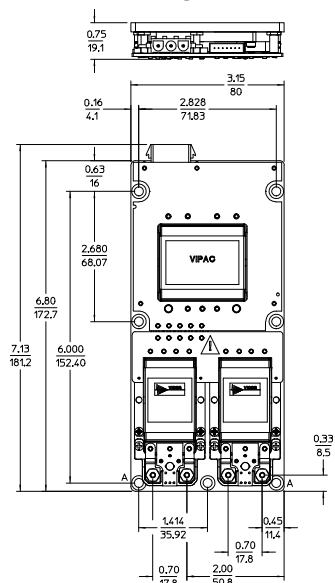


**Configuration MVC-E / MVX-E**

**LugMates**

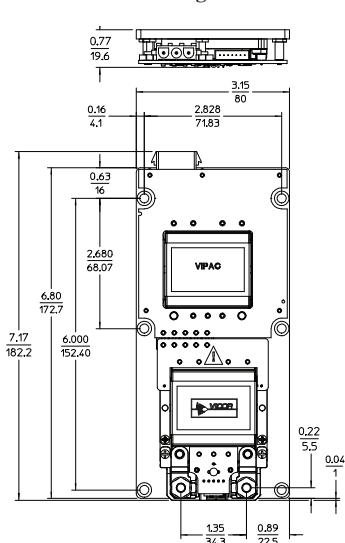


**Configuration MVC-F / MVX-F**

**LugMates**

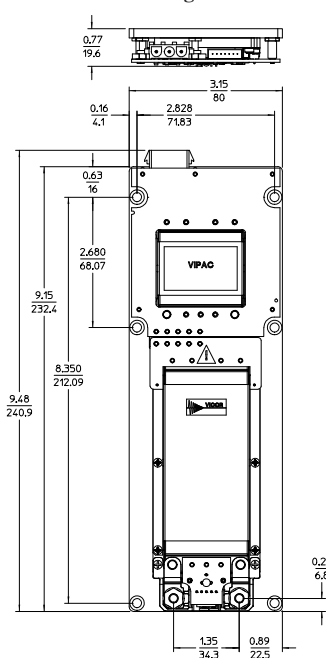

**Configuration MVC-G / MVX-G**


**LugMates**

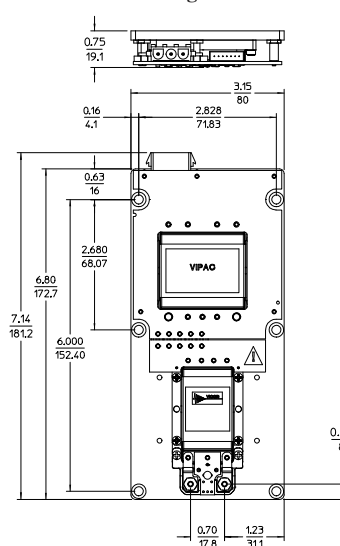


## HEAT SINK OPTIONS



**Coldplate**

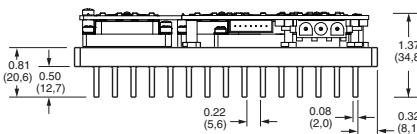

**0.5" Fin Option**

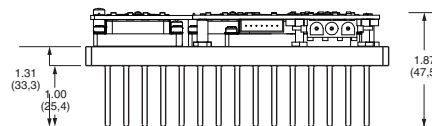

**1" Fin Option**

Fin spacing and relief are the same for both Fin options

---

## **Vicor's comprehensive line of power solutions includes high density AC-DC and DC-DC modules and accessory components, fully configurable AC-DC and DC-DC power supplies, and complete custom power systems.**

Information furnished by Vicor is believed to be accurate and reliable. However, no responsibility is assumed by Vicor for its use. Vicor makes no representations or warranties with respect to the accuracy or completeness of the contents of this publication. Vicor reserves the right to make changes to any products, specifications, and product descriptions at any time without notice. Information published by Vicor has been checked and is believed to be accurate at the time it was printed; however, Vicor assumes no responsibility for inaccuracies. Testing and other quality controls are used to the extent Vicor deems necessary to support Vicor's product warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

**Specifications are subject to change without notice.**

### **Vicor's Standard Terms and Conditions**

All sales are subject to Vicor's Standard Terms and Conditions of Sale, which are available on Vicor's webpage or upon request.

### **Product Warranty**

In Vicor's standard terms and conditions of sale, Vicor warrants that its products are free from non-conformity to its Standard Specifications (the "Express Limited Warranty"). This warranty is extended only to the original Buyer for the period expiring two (2) years after the date of shipment and is not transferable.

UNLESS OTHERWISE EXPRESSLY STATED IN A WRITTEN SALES AGREEMENT SIGNED BY A DULY AUTHORIZED VICOR SIGNATORY, VICOR DISCLAIMS ALL REPRESENTATIONS, LIABILITIES, AND WARRANTIES OF ANY KIND (WHETHER ARISING BY IMPLICATION OR BY OPERATION OF LAW) WITH RESPECT TO THE PRODUCTS, INCLUDING, WITHOUT LIMITATION, ANY WARRANTIES OR REPRESENTATIONS AS TO MERCHANTABILITY, FITNESS FOR PARTICULAR PURPOSE, INFRINGEMENT OF ANY PATENT, COPYRIGHT, OR OTHER INTELLECTUAL PROPERTY RIGHT, OR ANY OTHER MATTER.

This warranty does not extend to products subjected to misuse, accident, or improper application, maintenance, or storage. Vicor shall not be liable for collateral or consequential damage. Vicor disclaims any and all liability arising out of the application or use of any product or circuit and assumes no liability for applications assistance or buyer product design. Buyers are responsible for their products and applications using Vicor products and components. Prior to using or distributing any products that include Vicor components, buyers should provide adequate design, testing and operating safeguards.

Vicor will repair or replace defective products in accordance with its own best judgment. For service under this warranty, the buyer must contact Vicor to obtain a Return Material Authorization (RMA) number and shipping instructions. Products returned without prior authorization will be returned to the buyer. The buyer will pay all charges incurred in returning the product to the factory. Vicor will pay all reshipment charges if the product was defective within the terms of this warranty.

### **Life Support Policy**

VICOR'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS PRIOR WRITTEN APPROVAL OF THE CHIEF EXECUTIVE OFFICER AND GENERAL COUNSEL OF VICOR CORPORATION. As used herein, life support devices or systems are devices which (a) are intended for surgical implant into the body, or (b) support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in a significant injury to the user. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system or to affect its safety or effectiveness. Per Vicor Terms and Conditions of Sale, the user of Vicor products and components in life support applications assumes all risks of such use and indemnifies Vicor against all liability and damages.

### **Intellectual Property Notice**

Vicor and its subsidiaries own Intellectual Property (including issued U.S. and Foreign Patents and pending patent applications) relating to the products described in this data sheet. No license, whether express, implied, or arising by estoppel or otherwise, to any intellectual property rights is granted by this document. Interested parties should contact Vicor's Intellectual Property Department.

#### **Vicor Corporation**

25 Frontage Road  
Andover, MA, USA 01810  
Tel: 800-735-6200  
Fax: 978-475-6715

#### **email**

Customer Service: [custserv@vicorpower.com](mailto:custserv@vicorpower.com)  
Technical Support: [apps@vicorpower.com](mailto:apps@vicorpower.com)

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Vicor:

[MVC-D3029414](#)

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)