

# AMIS-3910XGEVB

## AMIS-3910XGEVB Evaluation Board User's Manual



ON Semiconductor®

<http://onsemi.com>

### Introduction

The AMIS-3910XGEVB evaluation board demonstrates the AMIS-39101 high side driver in SOIC package. The evaluation board includes all external components needed for operating AMIS-39101 and to demonstrate the small PCB surface area such an implementation requires.

### Overview

The AMIS-39101 is a robust high side driver featuring eight independent high current output drive channels along with a number of integrated fault protection circuits. This highly integrated product is designed for controlled delivery of power to a large variety of loads in industrial applications including motors, relays and LED arrays, among others. With all driver output channels in the conducting state, each channel can source up to 350 mA of continuous current (resistive load). In cases where all output drivers are not active, higher output current per channel can be achieved provided that the thermal limits of the device are not exceeded.

The device can be interfaced to a variety of microcontrollers via the serial interface link, in turn allowing for monitoring and controlling the state of each of the output drivers individually. In this case, at the onset of a potential hazardous situation the drivers are switched off and the diagnostic state of the drivers can be extracted via the serial interface.

### Features

- Eight High Side Output Drivers
- Up to 830 mA Continuous Current per Driver Pair (Resistive Load)
- Charge Pump with One External Capacitor

- Serial Interface
- Short-circuit Protection
- Diagnostic Features
- Power-down Mode
- Internal Thermal Shutdown
- 3.3 V and 5 V Microcontroller Compliant
- Excellent System ESD
- Automotive Compliant
- Temperature Range of  $-40^{\circ}\text{C}$  to  $+150^{\circ}\text{C}$
- Available in 28-pin SOIC
- These are Pb-Free Devices

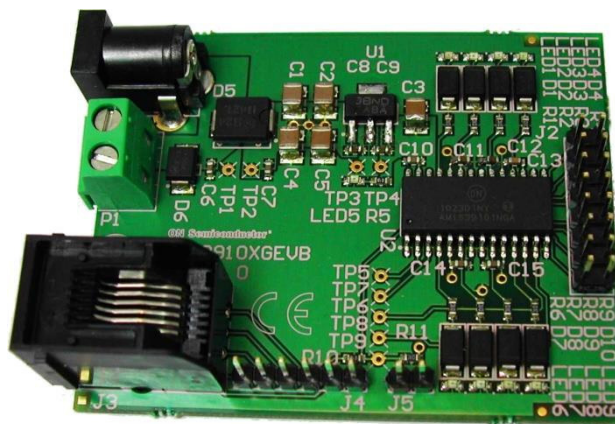


Figure 1. The AMIS-3910XGEVB Evaluation Board

## ELECTRICAL CHARACTERISTICS

Table 1. ELECTRICAL CHARACTERISTICS OF THE AMIS-3910XGEVB BOARD

Symbol	Parameter / Condition	Value		
		Min	Typ	Max
V_BAT Voltage				
V <sub>BAT</sub>	V_BAT Voltage	5.5 V	24 V	35 V
Current Drawn from V_BAT				
I <sub>BAT</sub>	Total Current Consumption	4 mA		3.75 A

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

# AMIS-3910XGEVB

## AMIS-39101 DESCRIPTION

The AMIS-39101 is a robust high side driver featuring eight independent high current output drive channels along with a number of integrated fault protection circuits. This highly integrated product is designed for controlled delivery of power to a large variety of loads in industrial applications including motors, relays and LED arrays, among others. With all driver output channels in the conducting state, each channel can source up to 350 mA of continuous current (resistive load). In cases where all output drivers are not active, higher output current per channel can be achieved provided that the thermal limits of the device are not exceeded.

Furthermore, in order to minimize system cost each output driver has built-in fly-back diodes. The device withstands short circuits to ground and supply, respectively.

It is designed with an array of integrated protection features including overtemperature and overcurrent detection and shutdown. The integrated charge pump requires only one external capacitor and provides for operation of the critical fault protection circuitry even in case of low supply voltages. The device can be interfaced to a variety of microcontrollers via the serial interface link, in turn allowing for monitoring and controlling the state of each of the output drivers individually. In this case, at the onset of a potential hazardous situation the drivers are switched off and the diagnostic state of the drivers can be extracted via the serial interface. The device also features a power down mode for reduced power consumption and has high built-in electrostatic discharge (ESD) protection capability for robust operation.

## AMIS-3910XGEVB DESCRIPTION

### BOM List

Table 2. AMIS-3910XGEVB BILL OF MATERIALS

Quantity	Reference	Part	Footprint	Comments	Manufacturer	Product Code
5	C1, C2, C3, C4, C5	10 $\mu$ F	C1210	50 V	Murata	GRM32DF51H106ZA01L
9	C6, C7, C8, C9, C10, C11, C12, C14, C15	100 nF	C0603	50 V	Murata	GRM188F51H104ZA01D
1	C13	22 nF	C0603	50 V	Murata	GRM188R71H223KA01D
8	D1, D2, D3, D4, D7, D8, D9, D10	MURA140T3G	SMA		ON Semiconductor	MURA140T3G
1	D5	MBRS4201T3G	SMC		ON Semiconductor	MBRS4201T3G
1	D6	P6SMB30CAT3G	SMB		ON Semiconductor	P6SMB30CAT3G
1	J1	NEB 21 R		DC Jack	Lumberg	NEB 21 R
1	J3			Terminal block	Molex	95009-2661
1	J2			Header, 16P	Wuerth Elektronik	613 016 211 21
1	J5			Header, 2P	Wuerth Elektronik	613 002 111 21
1	J4			Header, 6P	Wuerth Elektronik	613 006 111 21
1	P1				Wuerth Elektronik	691 216 510 002
9	LED1, LED2, LED3, LED4, LED5, LED6, LED7, LED8, LED9		LED0603	Green	Wuerth Elektronik	150060GS75000
2	R5, R10	1 k $\Omega$	R0603	100 mW	Multicomp	MCMR06X1001FTL
9	R1, R2, R3, R4, R6, R7, R8, R9, R11	10 k $\Omega$	R0603	100 mW	Multicomp	MCMR06X1002FTL
1	U1	NCV4274AST33T3G	SOT-223	LDO, 3.3 V	ON Semiconductor	NCV4274AST33T3G
1	U2	AMIS-39101	SOIC28		ON Semiconductor	AMIS39101PNPB4RG

# AMIS-3910XGEVB

## Schematic Diagram

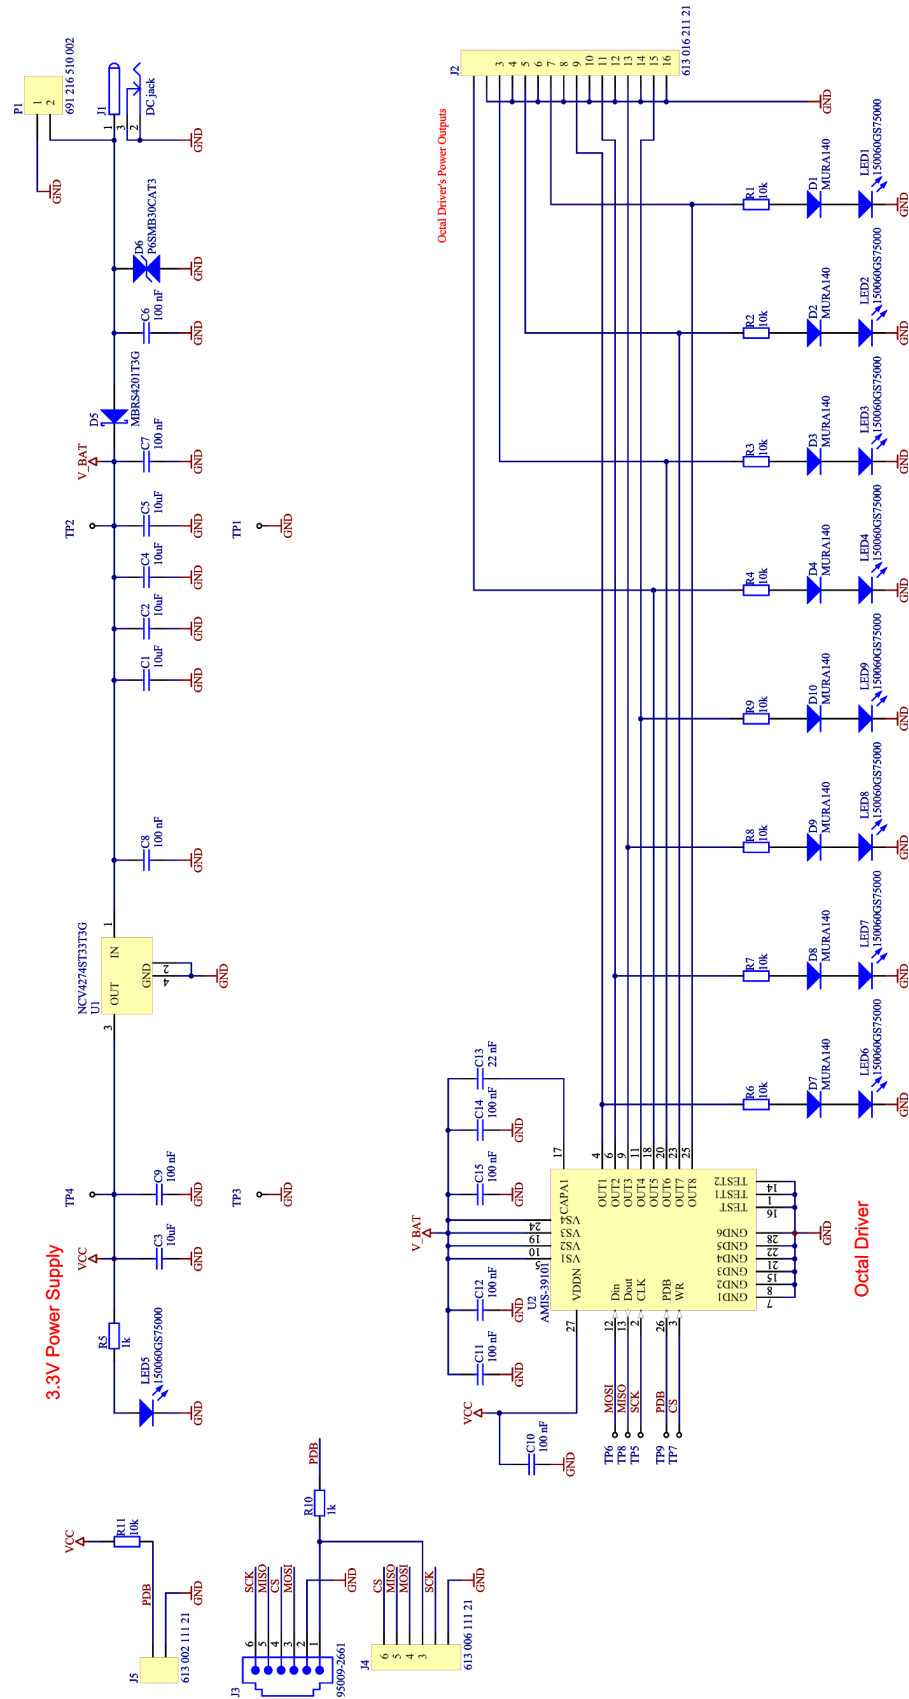


Figure 2. Schematic of AMIS-3910XGEVB



Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)