


# Low Signal Relay

## G6K

- Compact fourth generation design, offers excellent board space savings.
- Available in 2.54 and 3.2 mm coil-contact terminal spacing.
- “-Y” models meet 2.5 kV Bellcore surge requirements.
- Conforms to FCC Part 68.
- Terminal design based on Omron’s successful G6S relay.
- Available in PCB through-hole, SMT gullwing and SMT “inside-L” terminals.
- UL recognized / CSA certified.
- Available in single coil latching.
- RoHS Compliant.

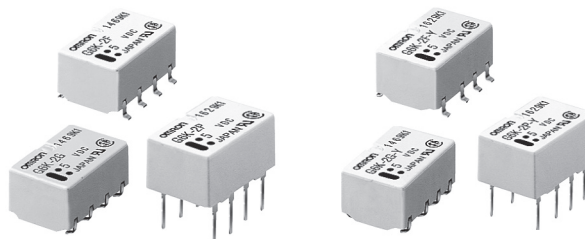

## Ordering Information

To Order: Select the part number and add the desired coil voltage rating (e.g., G6K-2F-DC5).

| Terminal         | Contact form | Model                           |                                                         |                                                                 |
|------------------|--------------|---------------------------------|---------------------------------------------------------|-----------------------------------------------------------------|
|                  |              | Non-latching<br>2.54 mm spacing | Non-latching<br>3.2 mm coil-contact<br>terminal spacing | Single coil latching<br>3.2 mm coil-contact<br>terminal spacing |
| Gullwing         | DPDT         | G6K-2F                          | G6K-2F-Y                                                | G6KU-2F-Y                                                       |
| Inside “L”       |              | G6K-2G                          | G6K-2G-Y                                                | G6KU-2G-Y                                                       |
| PCB through-hole |              | G6K-2P                          | G6K-2P-Y                                                | G6KU-2P-Y                                                       |

When ordering tape packing (surface mount versions), add “-TR” to the model number (e.g., G6K-2G-TR-DC5)

## Specifications

### ■ Contact Data

|                                         |                                   |
|-----------------------------------------|-----------------------------------|
| <b>Load</b>                             | Resistive load ( $\cos\phi=1$ )   |
| <b>Rated load</b>                       | 0.3 A at 125 VAC<br>1 A at 30 VDC |
| <b>Contact material</b>                 | Ag (Au clad)                      |
| <b>Max. carry current</b>               | 1 A                               |
| <b>Max. operating voltage</b>           | 125 VAC, 60 VDC                   |
| <b>Max. operating current</b>           | 1 A                               |
| <b>Max. switching capacity</b>          | 37.5 VA, 30W                      |
| <b>Min. permissible load (See note)</b> | 10 $\mu$ A at 10 mVDC             |

**Note:** This value was measured at a switching frequency of 120 operations/min and the criterion of contact resistance is 50  $\Omega$ . This value may vary depending on the switching frequency and operating environment. Always double-check relay suitability under actual operating conditions.

## ■ Coil Data

G6K- 2.5 mm coil-contact terminal spacing, standard, non-latching (G6K-2F, G6K-2G, G6K-2P)

G6K- 3.2 mm coil-contact terminal spacing, non-latching (G6K-2F-Y, G6K-2G-Y, G6K-2P-Y)

| Rated voltage<br>(VDC) | Rated current<br>(mA) | Coil resistance<br>(Ω) | Pick-up voltage  | Dropout voltage | Maximum voltage               | Power consumption<br>(mW) |
|------------------------|-----------------------|------------------------|------------------|-----------------|-------------------------------|---------------------------|
|                        |                       |                        | % of rated value |                 |                               |                           |
| 3                      | 33.0                  | 91                     | 80% max.         | 10% min.        | 150% max.<br>@ 23° C to 70° C | Approx. 100               |
| 4.5                    | 23.2                  | 194                    |                  |                 |                               |                           |
| 5                      | 21.1                  | 237                    |                  |                 |                               |                           |
| 6                      | 17.6                  | 341                    |                  |                 |                               |                           |
| 9                      | 11.3                  | 795                    |                  |                 |                               |                           |
| 12                     | 9.1                   | 1,315                  |                  |                 |                               |                           |
| 24                     | 4.6                   | 5,220                  |                  |                 |                               |                           |

G6KU- 3.2 mm spacing, single coil latching (G6KU-2F-Y, G6KU-2G-Y, G6KU-2P-Y)

| Rated voltage (VDC) | Rated current (mA) | Coil resistance (Ω) | Set-up voltage   | Reset voltage | Maximum voltage               | Power consumption (mW) |
|---------------------|--------------------|---------------------|------------------|---------------|-------------------------------|------------------------|
|                     |                    |                     | % of rated value |               |                               |                        |
| 3                   | 33.0               | 91                  | 75% max.         | 75% min.      | 150% max.<br>@ 23° C to 70° C | Approx. 100            |
| 4.5                 | 23.2               | 194                 |                  |               |                               |                        |
| 5                   | 21.1               | 237                 |                  |               |                               |                        |
| 6                   | 17.6               | 341                 |                  |               |                               |                        |
| 9                   | 11.3               | 795                 |                  |               |                               |                        |
| 12                  | 9.1                | 1,315               |                  |               |                               |                        |
| 24                  | 4.6                | 5,220               |                  |               |                               |                        |

**Note:** 1. The rated current and coil resistance are measured at a coil temperature of 23° C with a tolerance of ±10%.

2. The operating characteristics are measured at a coil temperature of 23° C unless otherwise specified.

3. Pick-up voltage will vary with temperature

4. The maximum voltage is the highest voltage that can be imposed on the relay coil instantaneously.

## ■ Characteristics

|                                    |                        |                                                                                                                                                                      |
|------------------------------------|------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Contact resistance (See note 1)    |                        | 100 mΩ max.                                                                                                                                                          |
| Operate (set) time (See note 2)    |                        | 3 ms max. (Approx. 1.4 ms - standard. Approx. 1.2 ms - latching)                                                                                                     |
| Release (set) time (See note 2)    |                        | 3 ms max. (Approx. 1.3 ms - standard. Approx. 1.2 ms - latching)                                                                                                     |
| Insulation resistance (See note 3) |                        | 1,000 MΩ min. (at 500 VDC)                                                                                                                                           |
| Dielectric strength                |                        | 1,500 VAC for 1 minute between coil contacts<br>1,000 VAC for 1 minute between contacts of different poles<br>750 VAC for 1 minute between contacts of the same pole |
| Surge withstand voltage            | “-Y” versions          | 2,500 V, (2 x 10 μs) between coil and contacts.<br>(Conforms to Bellcore specifications)                                                                             |
|                                    | Standard versions      | 1,500 V, (10 x 160 μs) between coil and contacts / contacts of different and same polarity.<br>(Conforms to FCC Part 68)                                             |
| Vibration                          | Mechanical durability  | 10 to 55 Hz; 5.0 mm double amplitude                                                                                                                                 |
|                                    | Malfunction durability | 10 to 55 Hz; 3.3 mm double amplitude                                                                                                                                 |
| Shock                              | Mechanical durability  | 1,000 m/s <sup>2</sup> (approx. 100G)                                                                                                                                |
|                                    | Malfunction durability | 750 m/s <sup>2</sup> (approx. 75G)                                                                                                                                   |
| Ambient temperature                |                        | -40° C to 70° C with no icing or condensation                                                                                                                        |
| Humidity                           |                        | 5 to 85% RH                                                                                                                                                          |
| Service life                       | Mechanical             | 50,000,000 operations min. (at 36,000 operations per hour)                                                                                                           |
|                                    | Electrical             | 100,000 operations min. at rated load (at 1,800 operations per hour)                                                                                                 |
| Weight                             |                        | Approx. 0.7 g                                                                                                                                                        |

**Note:** 1. The contact resistance was measured with 10 mA at 1 VDC with a voltage-drop method.

2. Values in parentheses are typical values unless otherwise stated.


3. The insulation resistance was measured with a 500-VDC megohmmeter applied to the same parts as those for checking the dielectric strength.

4. Data shown are of initial value.


5. The minimum set/reset signal width is 10 ms, for latching coil versions.

# ■ Characteristic data


## Maximum Switching Capacity

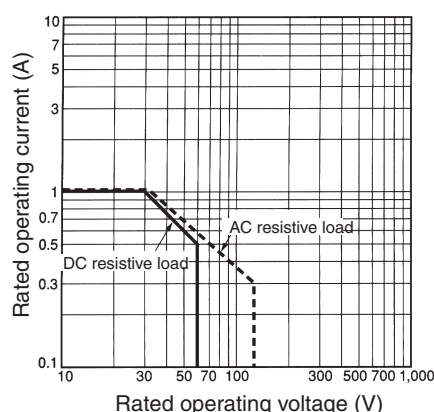

## Ambient Temperature vs. Maximum Coil Voltage

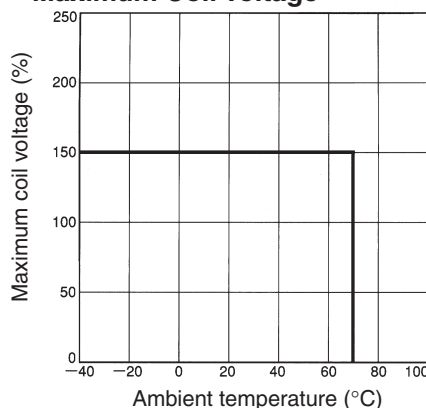


## Ambient Temperature vs. Switching Current

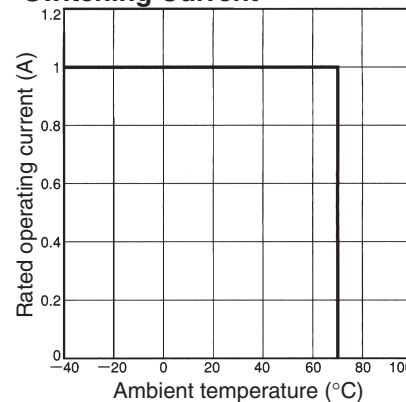


**Note:** The maximum coil voltage refers to the maximum value in a varying range of operating power voltage, not a continuous voltage.


## Electrical Service Life

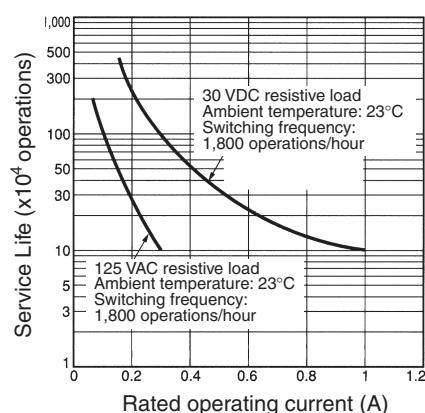


## Ambient Temperature vs. Must Operate or Must Release Voltage G6K-2G (F/P), G6K-2G (F/P)-Y

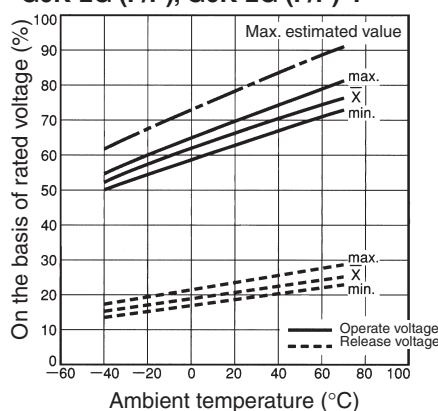


## Ambient Temperature vs. Must Set or Must Reset Voltage G6KU-2G (F/P)-Y

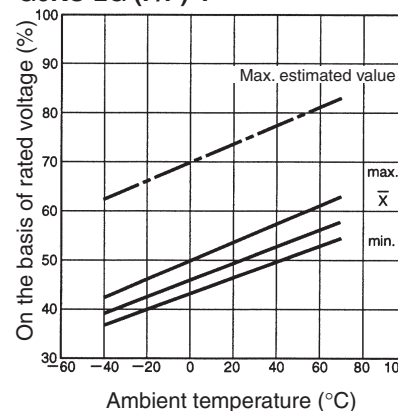

## Shock Malfunction

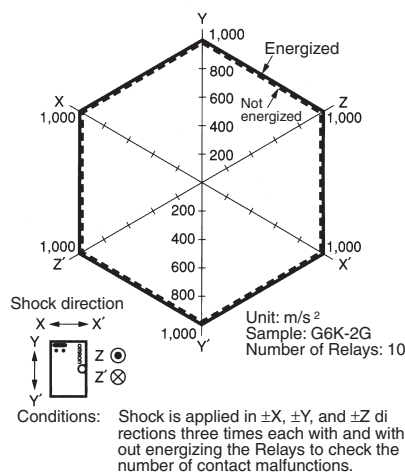


## Electrical Service Life (with Must Operate and Must Release Voltage) (See note.) G6K-2G (F/P), G6K-2G (F/P)-Y

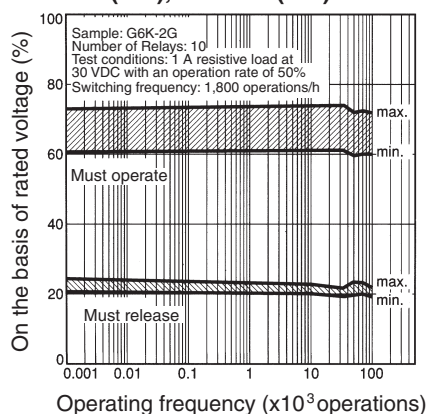


**Note:** The tests were conducted at an ambient temperature of 23°C.

## Electrical Service Life (Contact Resistance) (See note.) G6K-2G (F/P), G6K-2G (F/P)-Y

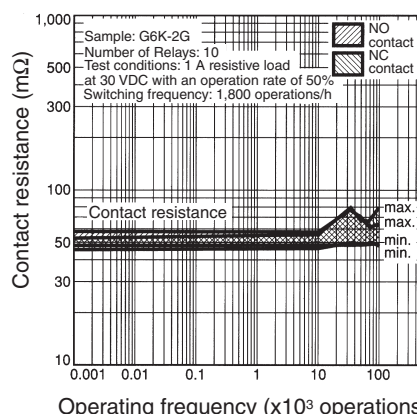


**Note:** The tests were conducted at an ambient temperature of 23°C.


# Contact Reliability Test (See note.) G6K-2G (F/P), G6K-2G (F/P)-Y

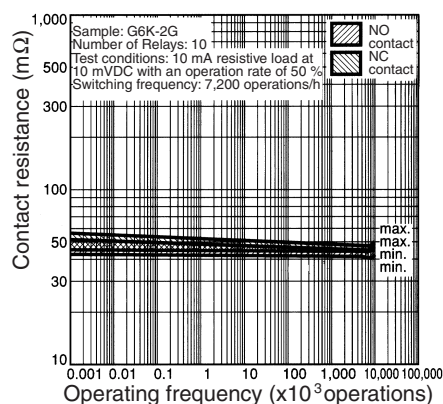

# Mutual Magnetic Interference G6K-2G (F/P), G6K-2G (F/P)-Y

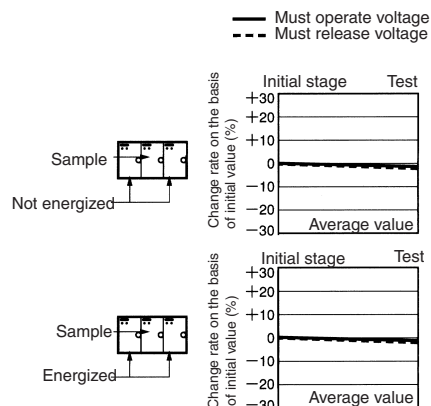




# Mutual Magnetic Interference G6K-2G (F/P), G6K-2G (F/P)-Y

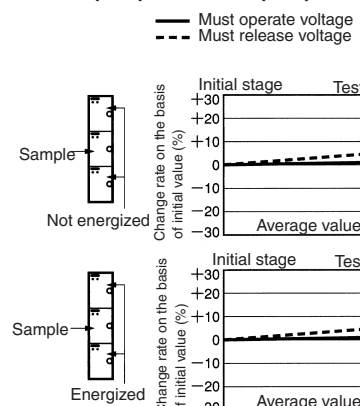


**Note 1:** The test was conducted at an ambient temperature of 23°C.

**2:** The contact resistance data are periodically measured reference values and are not values from each monitoring operation. Contact resistance values will vary according to the switching frequency and operating environment, so be sure to check operation under the actual operating conditions before use.


# External Magnetic Interference G6K-2G (F/P), G6K-2G (F/P)-Y

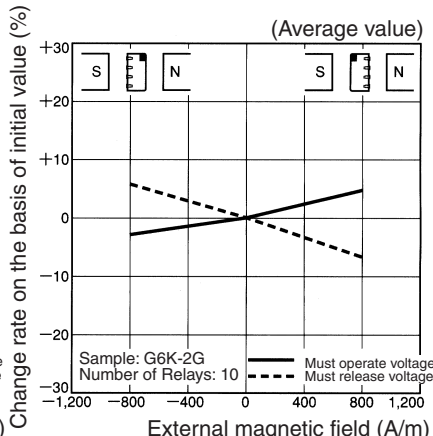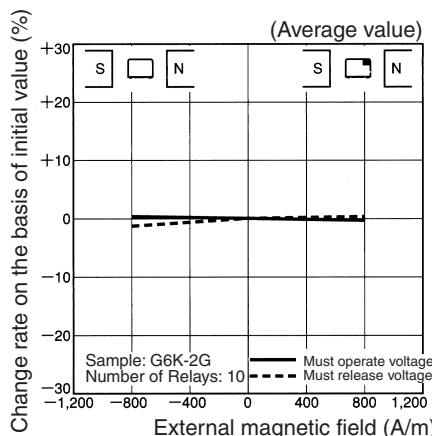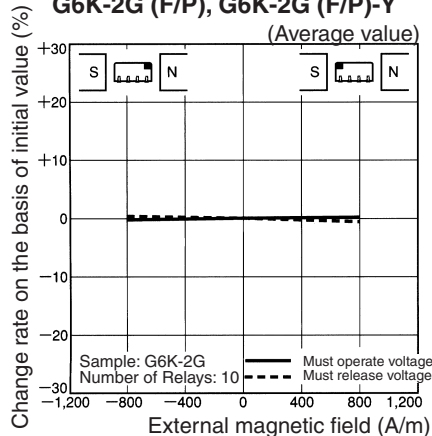


# High-frequency Characteristics (Isolation) G6K-2G (F/P), G6K-2G (F/P)-Y

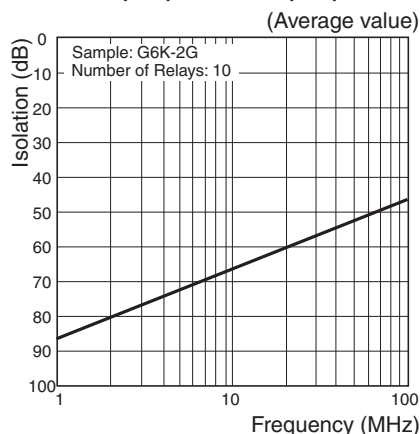

# High-frequency Characteristics (Insertion Loss) G6K-2G (F/P), G6K-2G (F/P)-Y

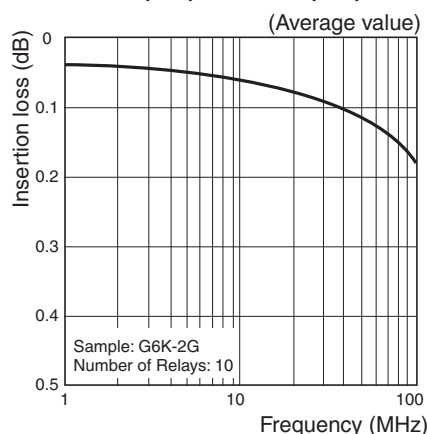


# High-frequency Characteristics (Return Loss) G6K-2G (F/P), G6K-2G (F/P)-Y

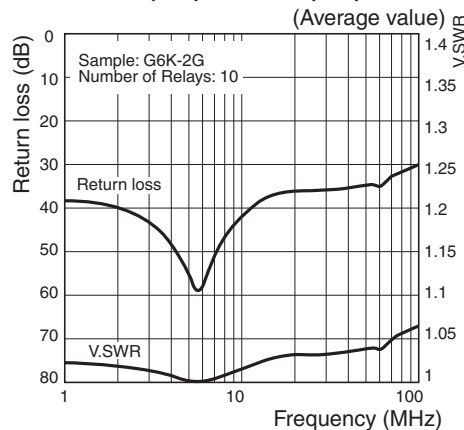


**Note: 1.** The tests were conducted at an ambient temperature of 23°C.

**2.** High-frequency characteristics depend on the PCB to which the Relay is mounted. Always check these characteristics including endurance in the actual machine before use.


### Must Operate and Must Release Time Distribution (See note.) G6K-2G (F/P), G6K-2G (F/P)-Y

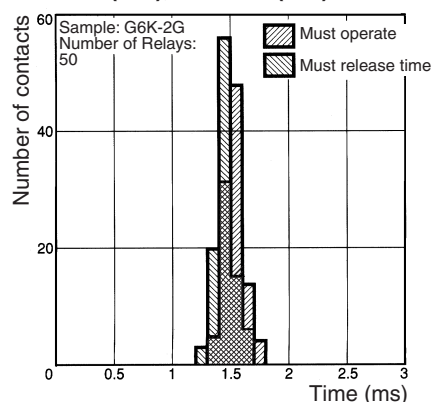

### Must Operate and Must Release Bounce Time Distribution (See note.) G6K-2G (F/P), G6K-2G (F/P)-Y

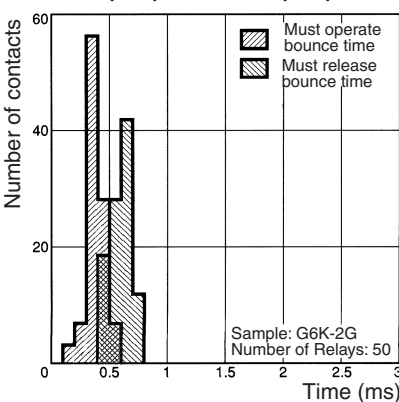

### Vibration Resistance G6K-2G (F/P), G6K-2G (F/P)-Y

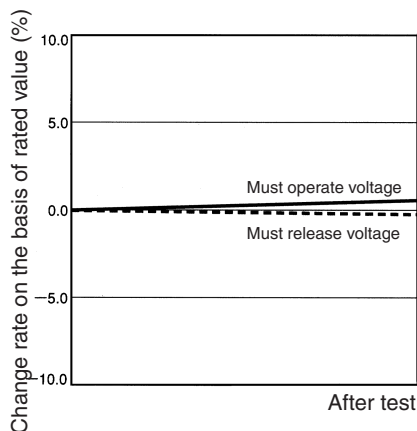

Note: The tests were conducted at an ambient temperature of 23°C.

## Approvals




UL Recognized (File No. E41515) / CSA Certified (File No. LR31928) - - Ambient Temp. = 40°C

| Contact form | Coil rating | Contact ratings                                                                            | Number of test operations |
|--------------|-------------|--------------------------------------------------------------------------------------------|---------------------------|
| DPDT         | 3 to 24 VDC | 1 A at 30 VDC (Resistive)<br>0.5 A at 60 VDC (Resistive)<br>0.3 A at 125 VAC (General Use) | 6,000                     |

## Dimensions


Note: All units are in millimeters unless otherwise indicated.

### G6K-2F




### Mounting Dimensions (Top View)

Tolerance: ±0.1 mm






### Terminal Arrangement/ Internal Connections (Top View)




Note 1: Each value has a tolerance of ±0.3 mm.  
Note 2: The coplanarity of the terminals is 0.1 mm max.

### G6K-2G




### Mounting Dimensions (Top View)

Tolerance: ±0.1 mm






### Terminal Arrangement/ Internal Connections (Top View)




Note 1: Each value has a tolerance of ±0.3 mm.  
Note 2: The coplanarity of the terminals is 0.1 mm max.

### G6K-2P




### Mounting Dimensions (Bottom View)

Tolerance: ±0.1 mm






### Terminal Arrangement/ Internal Connections (Bottom View)



Note: Each value has a tolerance of ±0.3 mm.


# G6K-2F-Y



## Mounting Dimensions (Top View)

Tolerance:  $\pm 0.1$  mm



## Terminal Arrangement/ Internal Connections (Top View)



**Note 1:** Each value has a tolerance of  $\pm 0.3$  mm.

**Note 2:** The coplanarity of the terminals is 0.1 mm max.

# G6K-2G-Y




\*Effective as of our production in April, 2013

## Mounting Dimensions (Top View)

Tolerance:  $\pm 0.1$  mm




## Terminal Arrangement/ Internal Connections (Top View)



**Note 1:** Each value has a tolerance of  $\pm 0.3$  mm.

**Note 2:** The coplanarity of the terminals is 0.1 mm max.


# G6K-2P-Y



## Mounting Dimensions (Bottom View)




Tolerance:  $\pm 0.1$  mm

## Terminal Arrangement/ Internal Connections (Bottom View)



**Note:** Each value has a tolerance of  $\pm 0.3$  mm.


# G6KU-2F-Y



## Mounting Dimensions (Top View)

Tolerance:  $\pm 0.1$  mm



## Terminal Arrangement/ Internal Connections (Top View)



**Note 1:** Each value has a tolerance of  $\pm 0.3$  mm.

**Note 2:** The coplanarity of the terminals is 0.1 mm max.

# G6KU-2G-Y




\*Effective as of our production in April, 2013

## Mounting Dimensions (Top View)

Tolerance:  $\pm 0.1$  mm




## Terminal Arrangement/ Internal Connections (Top View)



**Note 1:** Each value has a tolerance of  $\pm 0.3$  mm.

**Note 2:** The coplanarity of the terminals is 0.1 mm max.


# G6KU-2P-Y



## Mounting Dimensions (Bottom View)

Tolerance:  $\pm 0.1$  mm

## Terminal Arrangement/ Internal Connections (Bottom View)




**Note:** Each value has a tolerance of  $\pm 0.3$  mm.

# Packaging Information

|                                             |                                                                                                                                                                     |                                                                                      |
|---------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
| <b>Tube packing</b>                         | Standard nomenclature                                                                                                                                               | 50 pcs per anti-static tube                                                          |
| <b>Tape packing</b><br>(SMT versions, only) | When ordering, add "TR" before the rated coil voltage (e.g., G6K-2G-TR-DC5).<br>Note: TR is not part of the relay model number and will not be marked on the relay. | 900 pcs per reel<br>2 reels per box<br>Order in box multiples<br>(see details below) |

Relays in tube packing are arranged so that the orientation mark of each Relay is on the left side.  
Be sure to reference Relay orientation when mounting the Relay to the PCB.

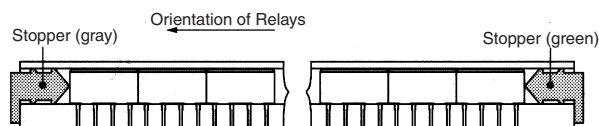


Tube length: 520 mm (stopper not included)  
No. of Relays per Tube: 50

## Tape and Reel Dimensions (Surface Mount Models)


- Tape type: ETX7200 (EIAJ - Electronic Industrial Association of Japan)
- Reel type: RPM-16D (EIAJ, 330 mm diameter)
- Relays per reel: 900

### 1. Direction of Relay Insertion

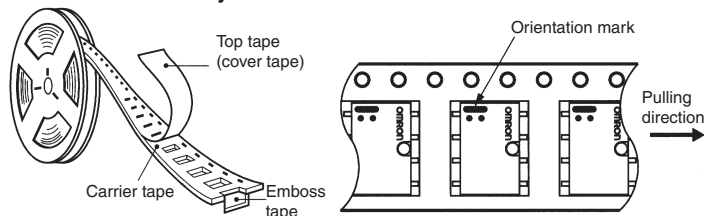


### 3. Carrier Tape Dimensions


G6K-2F, G6K-2F-Y, G6KU-2F-Y

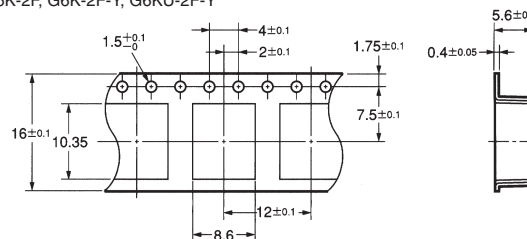

### 2. Reel Dimensions

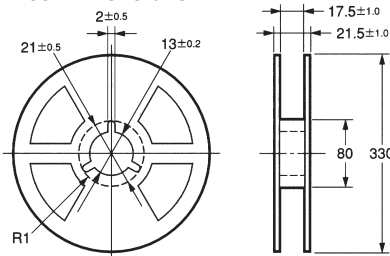

G6K-2G, G6K-2G-Y, G6KU-2G-Y

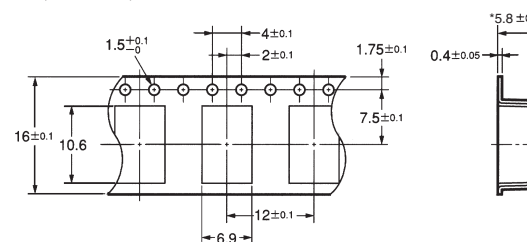


\*G6K(U)-2G-Y; Effective as of our production in April, 2013  
G6K-2G; Effective as of our production in July, 2013


## ■ Recommended Soldering Method

Temperature indicates the surface temperature of the PCBs.  
IRS Method (for surface mounting terminal models)

### (1) IRS Method (Mounting Solder: Lead)

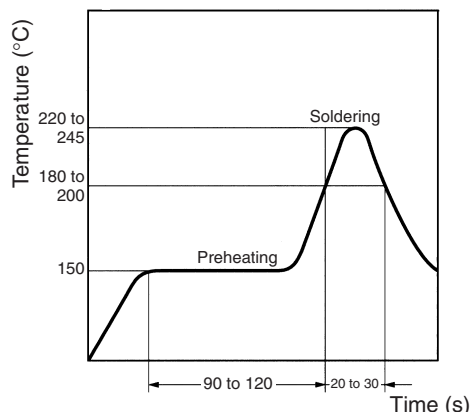


### (2) IRS Method (Mounting Solder: Lead-free)

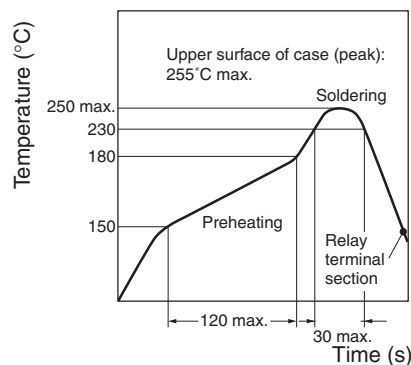


**Note:** The temperature profile indicates the temperature of the relay terminal section.

- The thickness of cream solder to be applied should be within a range between 150 and 200  $\mu\text{m}$  on OMRON's recommended PCB pattern.
- In order to perform correct soldering, it is recommended that the correct soldering conditions be maintained as shown below on the left side.

#### Correct Soldering



#### Incorrect Soldering

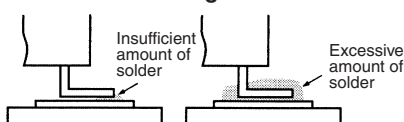

Visually check that the Relay is properly soldered.

## Precautions

### ■ Correct Use

#### Handling

Do not unpack the relay until mounting it.

#### Soldering

Solder: JIS Z3282, H63A or equivalent


Soldering temperature: Approx. 250°C (260°C if the DWS method is used)

Soldering time: Approx. 5 s max. (approx. 2 s for the first time and approx. 3 s for the second time if the DWS method is used)

Be sure to make a molten solder level adjustment so that the solder will not overflow on the PCB.

#### Claw Securing Force During Automatic Mounting

During automatic insertion of Relays, make sure to set the securing force of each claw to the following so that the Relays characteristics will be maintained.



#### Environmental Conditions During Operation, Storage, and Transportation

It is best to keep the relay in its packaging in a controlled environment until it is ready for mounting.

If the Relay is stored for a long time in an adverse environment with high temperature, high humidity, organic gases, or sulfide gases, sulfide or oxide films will form on the contact surfaces. These films may result in unstable contact, contact problems, or functional problems. Therefore, operate, store, or transport the product under specified environmental conditions.

#### Latching Relay Mounting

Make sure that the vibration or shock that is generated from other devices, such as relays in operation, on the same panel and imposed on the Latching Relay does not exceed the rated value, otherwise the Latching Relay that has been set may be reset or vice versa. The Latching Relay is reset before shipping. If excessive vibration or shock is imposed, however, the Latching Relay may be set accidentally. Be sure to apply a reset signal before use.

#### Maximum Allowable Voltage

The maximum allowable voltage of the coil can be obtained from the coil temperature increase and the heat-resisting temperature of coil insulating sheath material. (Exceeding the heat-resisting temperature may result in burning or short-circuiting.) The maximum allowable voltage also involves important restrictions which include the following:

- Must not cause thermal changes in or deterioration of the insulating material.
- Must not cause damage to other control devices.
- Must not cause any harmful effect on people.
- Must not cause fire.

Therefore, be sure to use the maximum allowable voltage as specified in the catalog.

As a rule, the rated voltage must be applied to the coil. A voltage exceeding the rated value, however, can be applied to the coil provided that the voltage is less than or equal to the maximum allowable voltage. It must be noted that continuous voltage application to the coil will cause a coil temperature increase which may affect characteristics such as electrical life and coil insulation.


## Coating

The Relay mounting on the PCB may be coated or washed but do not apply silicone coating or detergent containing silicone, otherwise the silicone coating or detergent may remain on the surface of the Relay.


## PCB Mounting

If two or more Relays are closely mounted with the long sides of the Relays facing each other and soldering is performed with infrared radiation, the solder may not be properly exposed to the infrared rays. Be sure to keep the proper distance between adjacent Relays as shown below to insure formation of good solder joints.

**G6K-2G**

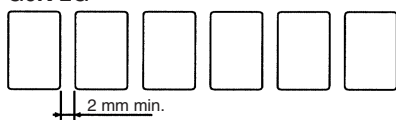

**G6K-2F**



Two or more Relays may be mounted as closely as desired with the short sides of the Relays facing each other.

All sales are subject to Omron Electronic Components LLC standard terms and conditions of sale, which can be found at [http://www.components.omron.com/components/web/webfiles.nsf/sales\\_terms.html](http://www.components.omron.com/components/web/webfiles.nsf/sales_terms.html)

**ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.**

To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.

---

**OMRON**<sup>®</sup>

**OMRON ELECTRONIC  
COMPONENTS LLC**

55 E. Commerce Drive, Suite B  
Schaumburg, IL 60173

**847-882-2288**

**OMRON ON-LINE**

Global - <http://www.omron.com>

USA - <http://www.components.omron.com>

Cat. No. X301-E-1c

03/13

Specifications subject to change without notice

Printed in USA

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)