

PRODUCT NO.
73725

(CONTINUED)

8. P/N'S WITH SUFFIX "LF" ARE LEAD FREE P/N'S



FOR LEAD FREE P/N, THE PRODUCT MEET EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATION AS DESCRIBED IN GS-22-008

FOR THE PRODUCTS WITH THE METAL SHELL PLATING NICKEL AND MATTE SN CAN WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 40 SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW PROCESS; FOR THE PRODUCTS WITH METAL SHELL PLATING BRIGHT SN OR SEMI-BRIGHT SN CAN'T WITHSTAND REFLOW AND JUST CAN WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN WAVE SOLDERING PROCESS.



FOR ALL LEAD FREE P/N'S, WITH SUFFIX LF.

12. THE PRODUCT CAN BE USED FOR PIP PROCESS


13. DATUM OF CUSTOMER'S PCB LAYOUT.

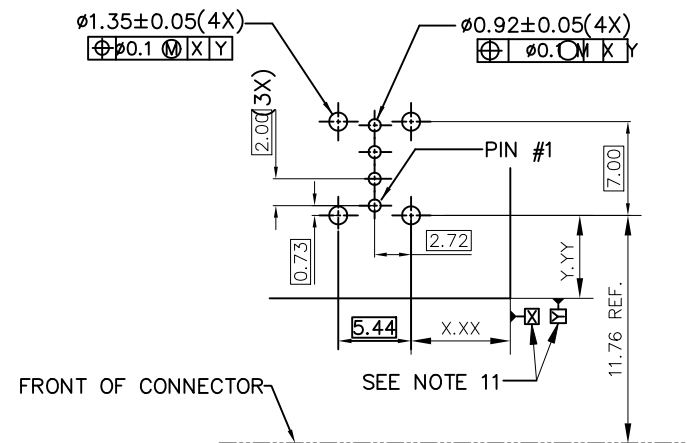

PC BOARD MOUNTING DIMENSIONS FOR 4 PIN



WITHOUT SENSOR CONTACT


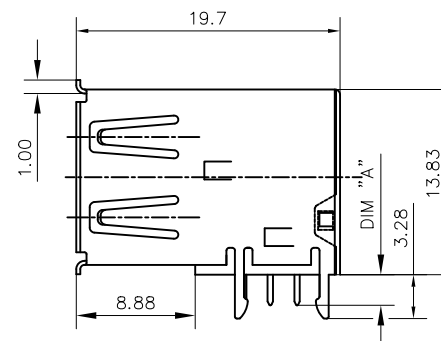


FOR 73725-X1X0B
HOLD DOWN STYLE "A"


mat'l. code				surface ¹²³ /tolerance			projection		product family		
				ISO 1302 ✓ ISO 406 ISO 1101					HPL 511 USB 2.0		
ltr	ecn	no	dr	date			tolerances unless otherwise specified		title		
AJ							mm		USB UP-RIGHT RECEPT		
				angles			.0±.30				
				linear			.00±.20				
				0°±2'			.000±.10				
				dr			PAMP		5/20/97		
				eng			R Y LIU		5/20/97		
				chr			R Y LIU		5/20/97		
				appd			JENN TSAO		5/20/97		
sheet		revision							dwg no		
index		sheet							sheet2 of 4		
									size		
									A3		
									type		
									Product Customer Drawing		
				</							

PRODUCT NO.


73725

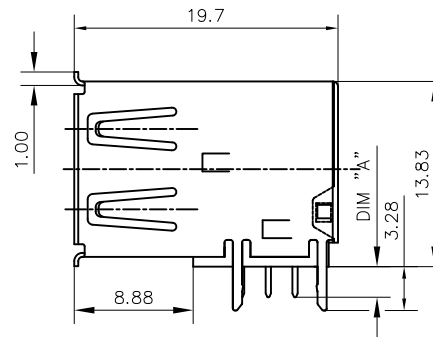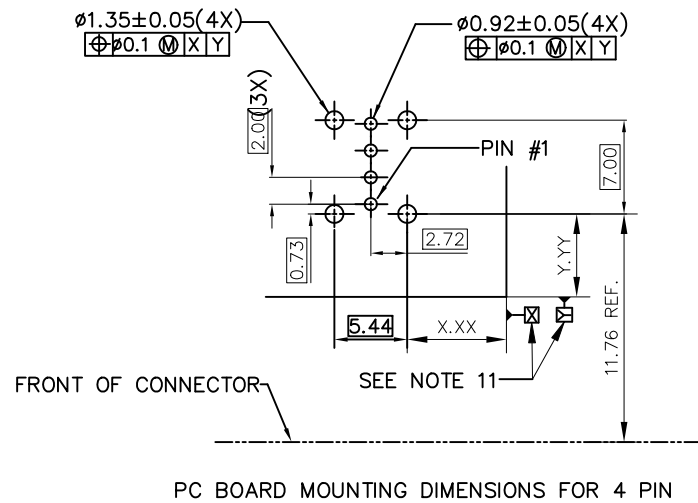


WITHOUT SENSOR CONTACT
FOR 73725-X1X0B
HOLD DOWN STYLE "B"

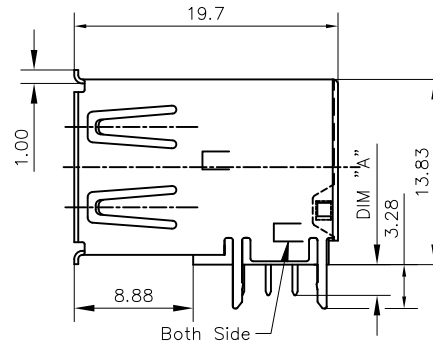


WITHOUT SENSOR CONTACT
FOR 73725-XXA0XLF
73725-XXB0XLF ONLY
HOLD DOWN STYLE "F"



SECTION A-A

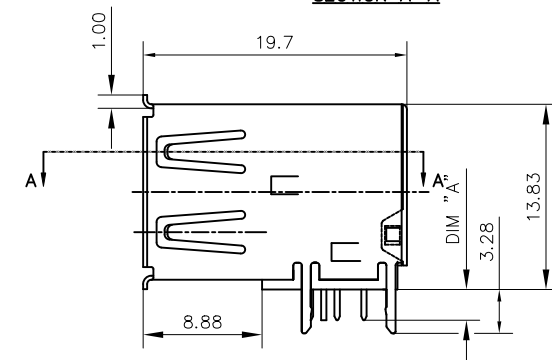


WITH SENSOR CONTACT
FOR 73725-X0X0B
HOLD DOWN STYLE "B"

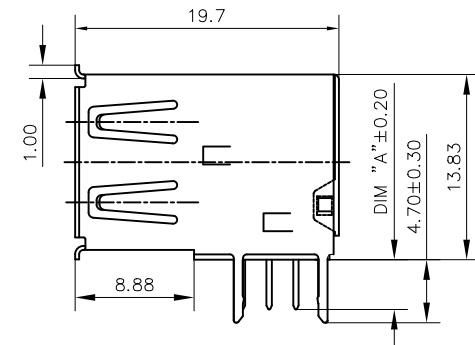


WITHOUT SENSOR CONTACT
FOR 73725-X191XLF
HOLD DOWN STYLE "D"

mat'l. code				surface ¹²³ ISO 1302 ✓		toleranceISO 406 ISO 1101		projection 		product familyHPL 511 USB 2.0					
ltr	ecn	no	dr	date	tolerances unless otherwise specified					title					
AJ					angles		.0±.30		mm		USB UP-RIGHT RECEPT				
					linear		.00±.20								
					0°±2'		.000±.10								
					dr	PAMP	5/20/97		Amphenol FCI		dwg no		sheet3 of 4		size
					eng	R Y LIU	5/20/97				73725		A3		
					chr	R Y LIU	5/20/97								
					appd	JENN TSAO	5/20/97				type Product Customer Drawing				
sheet index		revision sheet													


PRODUCT NO.
73725

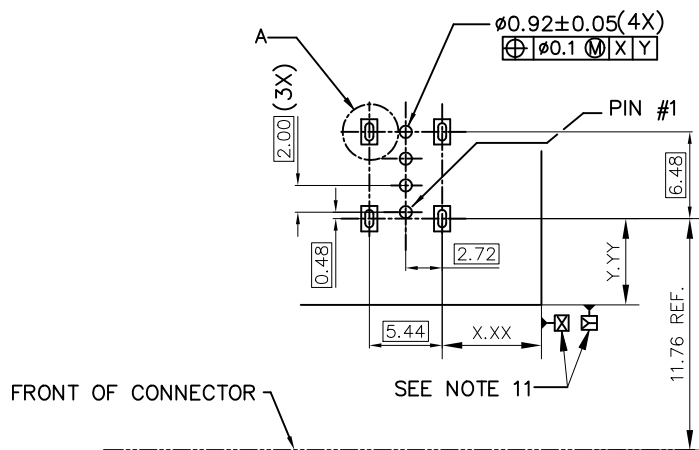

PC BOARD MOUNTING DIMENSIONS FOR 4 PIN



DETAIL A 5 : 1

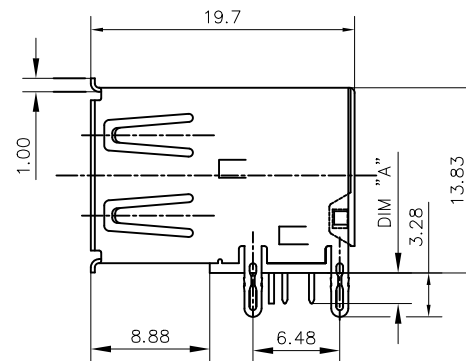

WITHOUT SENSOR CONTACT
FOR 73725-X150B
HOLD DOWN STYLE "C"

mat'l. code				surface ¹²³ ISO 1302		toleranceISO 406 ISO 1101		projection 		product family HPL 511 USB 2.0									
ltr		ecn no		dr		date		tolerances unless otherwise specified				title							
AJ								angles		.0±.30				USB UP-RIGHT RECEPT					
								linear		.00±.20									
								0°±2°		.000±.10									
								dr		PAMP		5/20/97		dwg no		sheet4 of 4		size	
								engr		R Y LIU		5/20/97				73725		A3	
								chr		R Y LIU		5/20/97							
								appd		JENN TSAO		5/20/97		type		Product		Customer Drawing	
sheet index		revision sheet																	

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru