

PR1 Relay Base for:

- Relays With SPDT or DPDT Contacts
- Solid-State Relays With the Same Structure

Universal Modular System

The 15 mm (0.591 in.) wide PR1 relay base range is a modular system consisting of PR1-B... relay bases, compact electromechanical relays with SPDT or DPDT contacts, solid-state relays, and a comprehensive range of accessories. These include:

- Plug-in input/interference suppression modules
- Relay retaining bracket with labeling field and eject function
- Labels
- Continuous jumpers

Depending on the application, complete coupling relays can be created, which are optimized in terms of cost, function, and service life.

Base Versions

The relay bases are available in two versions with screw connections³⁾ - the flat 2/2 level PR1-BSC2 and the "logical" 1/3 level PR1-BSC3. The second version has coil and contact connections that are located opposite one another and thus meets the requirements of modern control cabinet concepts with clear isolation of control signals and load. Both bases can be extended in terms of functions through the use of keyed plug-in modules with various display and interference suppression elements.


Cost-Effective Electromechanical Relays







Powerful and cost-effective REL-MR electromechanical miniature power relays are recommended for standard applications. They are available in the following versions:

- With one 16 A PDT contact
 - With two 8 A PDT contacts
 - In all popular AC and DC coil voltages
 - In power contact and gold contact versions
- Additional suitable standard and special relays (e.g., for lamp loads) are available on request⁴⁾.

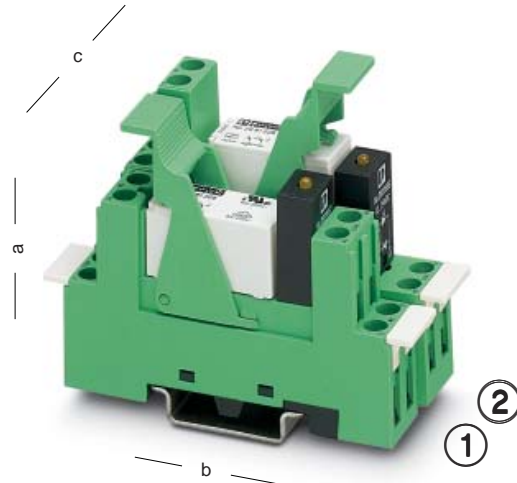Alternative: Wear-Resistant Solid-State Relays

In critical applications, electromechanical relays reach their maximum service life relatively quickly. This is why, as an alternative, PR1-B... bases can be fitted with OPT wear-resistant solid-state relays with the same structure. These relays provide optimum service life for applications with a high switching frequency and/or for switching high DC loads.



| | ① | ② |
|------------------------------------|---|--|
| | PR1-BSC2... | PR1-BSC3... |
| Nominal voltage U ¹⁾ | 300 V AC | 300 V AC |
| Nominal current I ¹⁾ | 12 A | 12 A |
| Conductor cross section | | |
| – Solid | 2 x 2.5 mm ² | 2 x 2.5 mm ² |
| – Flexible | 2 x 2.5 mm ² | 2 x 2.5 mm ² |
| American Wire Gauge | 2 x 14 AWG | 2 x 14 AWG |
| Connection type |  M 3 |  M 3 |
| Approvals ²⁾ |  |  |
| Stripping length | 8 mm (0.31 in.)  | 8 mm (0.31 in.)  |
| Height (a) with retaining bracket: | | |
| – EL1-P16 | 63 mm (2.480 in.) | 66 mm (2.598 in.) |
| – EL1-P25 | 71 mm (2.795 in.) | 79 mm (3.110 in.) |
| Depth (b) | 75 mm (2.953 in.) | 78.5 mm (3.091 in.) |
| Width (c) | 15.5 mm (0.610 in.) | 15.5 mm (0.610 in.) |
| Ambient temperature | -25°C...+85°C (-13°F...+185°F) | -25°C...+85°C (-13°F...+185°F) |













¹⁾ The maximum electrical data is relay dependent.

²⁾ Details on request.

³⁾ Spring-cage connections on request.



⁴⁾ See INTERFACE catalog.

PR1 Relay Base for Miniature Power Relays With SPDT or DPDT Contacts

| Description | Type | Order No. | Pcs. Pkt. |
|--|---|--|--|
| <p>PR1 relay base, for miniature power relays or miniature switching relays with SPDT or DPDT contacts or solid-state relays with a similar structure, 2/2 level version, screw connections, optional connection of input/interference suppression module, for mounting on , safe isolation of I/Os, including MP1 markers, 10 pcs. per pack</p>  | PR1-BSC2/2x21 | 28 33 51 8 | 10 |
| <p>PR1 relay base, for miniature power relays or miniature switching relays with SPDT or DPDT contacts or solid-state relays with a similar structure, 1/3 level version, screw connections, optional connection of input/interference suppression module, for mounting on , safe isolation of I/Os, including MP1 markers, 10 pcs. per pack</p>  | PR1-BSC3/2x21 | 28 33 52 1 | 10 |
| <p>Relay retaining bracket, with eject function and integrated device marking area (7.5 x 15 mm [0.295 x 0.591 in.]), suitable for PR1 relay base: – For 16 mm (0.630 in.) high miniature power relays and solid-state relays¹⁾ – For 25 mm (0.984 in.) high miniature switching relays¹⁾ and solid-state relays¹⁾</p>  | EL1-P16 EL1-P25 | 28 33 54 7 28 33 55 0 | 10 10 |
| <p>Device marker, 6 x 15 mm (0.236 x 0.591 in.) marking area</p>  | MP1 | 28 33 63 1 | 10 |
| <p>Plug-in module, for mounting on PR1 and PR2, with free-wheeling diode and yellow LED, polarity: A1 +, A2 – Input voltage: – 12 - 24 V DC ±20% – 48 - 60 V DC ±20% – 110 V DC ±20%</p>  | LDP-12-24DC LDP-48-60DC LDP-110DC | 28 33 65 7 28 33 66 0 28 33 67 3 | 10 10 10 |
| <p>Plug-in module, for mounting on PR1 and PR2, with free-wheeling diode and yellow LED, polarity: A1 –, A2 + (Japanese standard) Input voltage: – 12 -24 V DC ±20% – 48 - 60 V DC ±20% – 110 V DC ±20%</p>  | LDM-12-24DC LDM-48-60DC LDM-110DC | 28 33 68 6 28 33 69 9 28 33 70 9 | 10 10 10 |
| <p>Plug-in module, for mounting on PR1 and PR2, with varistor and yellow LED, input voltage: – 12 - 24 V AC/DC ±20% – 48 - 60 V AC/DC ±20% – 120 - 230 V AC/110 V DC ±20%</p>  | LV-12-24UC LV-48-60UC LV-120-230AC/110 DC | (30 V varistor) (75 V varistor) (275 V varistor) | 28 33 71 2 28 33 72 5 28 33 73 8 |
| <p>Plug-in module, for mounting on PR1 and PR2, with varistor Input voltage: – 12 - 24 V AC/DC ±20% – 48 - 60 V AC/DC ±20% – 120 - 230 V AC/DC ±20%</p>  | V-12-24UC V-48-60UC V-120-230UC | (30 V varistor) (75 V varistor) (275 V varistor) | 28 33 86 4 28 33 87 7 28 33 88 0 |
| <p>Plug-in module, for mounting on PR1 and PR2, with RC element Input voltage: – 12 - 24 V AC/DC ±20% – 48 - 60 V AC/DC ±20% – 120 - 230 V AC/DC ±20%</p>  | RC-12-24UC RC-48-60UC RC-120-230UC | (220 nF/100 Ω) (220 nF/220 Ω) (100 nF/470 Ω) | 28 33 74 1 28 33 75 4 28 33 76 7 |
| <p>Wire jumper, 50-pos., can be separated, maximum jumpering distance of 60 mm (2.36 in.), 0.5 mm² (20 AWG), insulation: – Blue – Black – Gray</p>  | DB 50-90 BU DB 50-90 BK DB 50-90 GY | 28 21 18 0 28 20 91 6 28 20 92 9 | 1 1 1 |

¹⁾ See INTERFACE catalog

REL-MR Plug-In Miniature Power Relays¹⁾ With SPDT Contact, Suitable for PR1 Relay Base

| | |
|--|--|
| Description | |
| Plug-in miniature power relays, with power contact, SPDT contact, suitable for PR1-B... base Coil voltage: – 12 V DC – 24 V DC – 60 V DC – 110 V DC – 24 V AC – 120 V AC – 230 V AC | |
|  | |
|  | |
| Pin assignment: view of the connections. | |
| As above, but with solid gold coating, SPDT contact Coil voltage: – 12 V DC – 24 V DC – 110 V DC – 24 V AC – 120 V AC – 230 V AC | |

| Type | Order No. | Pcs. Pkt. |
|----------------------|------------|-----------|
| REL-MR- 12DC/21HC | 29 61 30 9 | 10 |
| REL-MR- 24DC/21HC | 29 61 31 2 | 10 |
| REL-MR- 60DC/21HC | 29 61 32 5 | 10 |
| REL-MR-110DC/21HC | 29 61 33 8 | 10 |
| REL-MR- 24AC/21HC | 29 61 40 6 | 10 |
| REL-MR-120AC/21HC | 29 61 41 9 | 10 |
| REL-MR-230AC/21HC | 29 61 42 2 | 10 |
| REL-MR- 12DC/21HC AU | 29 61 53 2 | 10 |
| REL-MR- 24DC/21HC AU | 29 61 54 5 | 10 |
| REL-MR-110DC/21HC AU | 29 61 56 1 | 10 |
| REL-MR- 24AC/21HC AU | 29 61 50 3 | 10 |
| REL-MR-120AC/21HC AU | 29 61 51 6 | 10 |
| REL-MR-230AC/21HC AU | 29 61 52 9 | 10 |

Technical Data

Coil Side DC Coils

Nominal input voltage U_N
 Permissible range
 Typical input current at U_N
 Typical response time at U_N
 Typical release time at U_N
 DC coil resistance at 20°C (68°F)

| 12 V DC | 24 V DC | 60 V DC | 110 V DC |
|-----------------------|-------------|----------------|-----------------|
| See diagram on page 5 | | | |
| 33 mA | 17 mA | 8.2 mA | 4.1 mA |
| 7 ms | 7 ms | 7 ms | 7 ms |
| 3 ms | 3 ms | 3 ms | 3 ms |
| 360 Ω ±10% | 1440 Ω ±10% | 7340 Ω -15+35% | 26600 Ω -15+35% |

Coil Side AC Coils (50 Hz/60 Hz)

Nominal input voltage U_N
 Permissible range (with reference to U_N)
 Typical input current at U_N (50 Hz/60 Hz)
 Typical response time at U_N (depending on phase relation)
 Typical release time at U_N (depending on phase relation)
 DC coil resistance at 20°C (68°F)

| 24 V AC | 120 V AC | 230 V AC |
|-----------------------|-------------|--------------|
| See diagram on page 5 | | |
| 32 mA/24 mA | 7 mA/5 mA | 3 mA/2.5 mA |
| 3 - 12 ms | 3 - 12 ms | 3 - 12 ms |
| 2 - 9 ms | 2 - 9 ms | 2 - 9 ms |
| 350 Ω ±10% | 8100 Ω ±15% | 32500 Ω ±15% |

Contact Side

Contact type
 Contact material
 Maximum switching voltage
 Minimum switching voltage
 Limiting continuous current
 Maximum inrush current
 Minimum switching current
 Maximum shutdown power (ohmic load) 250 V AC
 Minimum switching power

| REL-MR...21HC | REL-MR...21HCAU |
|--|----------------------------------|
| Single contact, 1 Form C contact | Single contact, 1 Form C contact |
| AgNi | AgNi + 5 μ Au ²⁾ |
| 250 V AC/DC | 30 V AC/36 V DC(250 V AC/DC) |
| 12 V | 100 mV (12 V) |
| 16 A | 50 mA (16 A) |
| 30 A (300 ms) | 50 mA (30 A, 300 ms) |
| 100 mA | 1 mA (100 mA) |
| 4000 VA | – (4000 VA) |
| For additional data, see diagram on page 5 | |
| 1.2 W | 100 μW (1.2 W) |

General Data

Test voltage: Winding/contact
 Ambient temperature
 Nominal operating mode
 Mechanical service life
 Electrical service life
 Standards/specifications



5 kV, 50 Hz, 1 minute
 -40°C to +85°C (-40°F to +185°F)
 100% ED
 3 x 10⁷ cycles
 See diagram on page 5
 IEC 60 255/DIN VDE 0435 (in relevant parts), DIN EN 50 178/
 VDE 0160 (in relevant parts), EN 60 730/DIN VDE 0631,
 IEC 60 664/IEC 60 664 A/DIN VDE 0110, degree of pollution 3,
 Surge Voltage Category III
 UL; CSA; VDE
 Any/can be mounted without spacing

Approvals
 Mounting position/mounting

¹⁾ Alternative: For REL/KSR miniature switching relay, OPT solid-state relay, see INTERFACE catalog.

²⁾ If the specified maximum values are exceeded, the gold coating will be damaged. In subsequent operation, the maximum values given in brackets will apply. This can then result in reduced service life, similar to simple power contacts.

REL-MR Plug-In Miniature Power Relays¹⁾ With DPDT Contacts, Suitable for PR1 Relay Base

| | |
|--|--|
| Description | |
| Plug-in miniature power relays, with power contacts, DPDT contacts Coil voltage: – 12 V DC – 24 V DC – 60 V DC – 110 V DC – 24 V AC – 120 V AC – 230 V AC | |
|  | |
|  | |
| Pin assignment: view of the connections. | |
| As above, but with solid gold coating, DPDT contacts Coil voltage: – 12 V DC – 24 V DC – 60 V DC – 110 V DC – 24 V AC – 120 V AC – 230 V AC | |

| Type | Order No. | Pcs. Pkt. |
|-----------------------|------------|-----------|
| REL-MR- 12DC/21-21 | 29 61 25 7 | 10 |
| REL-MR- 24DC/21-21 | 29 61 19 2 | 10 |
| REL-MR- 60DC/21-21 | 29 61 27 3 | 10 |
| REL-MR-110DC/21-21 | 29 61 20 2 | 10 |
| REL-MR- 24AC/21-21 | 29 61 43 5 | 10 |
| REL-MR-120AC/21-21 | 29 61 44 8 | 10 |
| REL-MR-230AC/21-21 | 29 61 45 1 | 10 |
| REL-MR- 12DC/21-21 AU | 29 61 29 9 | 10 |
| REL-MR- 24DC/21-21 AU | 29 61 21 5 | 10 |
| REL-MR- 60DC/21-21 AU | 29 61 28 6 | 10 |
| REL-MR-110DC/21-21 AU | 29 61 22 8 | 10 |
| REL-MR- 24AC/21-21 AU | 29 61 46 4 | 10 |
| REL-MR-120AC/21-21 AU | 29 61 47 7 | 10 |
| REL-MR-230AC/21-21 AU | 29 61 48 0 | 10 |

Technical Data

Coil Side DC Coils

Nominal input voltage U_N
 Permissible range
 Typical input current at U_N
 Typical response time at U_N
 Typical release time at U_N
 DC coil resistance at 20°C (68°F)

| 12 V DC | 24 V DC | 60 V DC | 110 V DC |
|-----------------------|-------------|----------------|----------------|
| See diagram on page 5 | | | |
| 33 mA | 17 mA | 8.2 mA | 4.1 mA |
| 7 ms | 7 ms | 7 ms | 7 ms |
| 3 ms | 3 ms | 3 ms | 3 ms |
| 360 Ω ±10% | 1440 Ω ±10% | 7340 Ω -15+35% | 26600Ω -15+35% |

Coil Side AC Coils (50 Hz/60 Hz)

Nominal input voltage U_N
 Permissible range (with reference to U_N)
 Typical input current at U_N (50 Hz/60 Hz)
 Typical response time at U_N (depending on phase relation)
 Typical release time at U_N (depending on phase relation)
 DC coil resistance at 20°C (68°F)

| 24 V AC | 120 V AC | 230 V AC |
|-----------------------|-------------|--------------|
| See diagram on page 5 | | |
| 32 mA/24 mA | 7 mA/5 mA | 3 mA/2.5 mA |
| 3 -12 ms | 3 -12 ms | 3 -12 ms |
| 2 - 9 ms | 2 - 9 ms | 2 - 9 ms |
| 350 Ω ±10% | 8100 Ω ±15% | 32500 Ω ±15% |

Contact Side

Contact type
 Contact material
 Maximum switching voltage
 Minimum switching voltage
 Limiting continuous current
 Maximum inrush current
 Minimum switching current
 Maximum shutdown power (ohmic load) 250 V AC
 Minimum switching power

| REL-MR...21-21 | REL-MR...21-21AU |
|--|-----------------------------------|
| Single contact, 2 Form C contacts | Single contact, 2 Form C contacts |
| AgNi | AgNi + 5 μ Au ²⁾ |
| 250 V AC/DC | 30 V AC/36 V DC(250 V AC/DC) |
| 5 V | 100 mV (5 V) |
| 8 A | 50 mA (8 A) |
| 15 A (300 ms) | 50 mA (15 A, 300 ms) |
| 10 mA | 1 mA (10 mA) |
| 2000 VA | – (2000 VA) |
| For additional data, see diagram on page 5 | |
| 50 mW | 100 μW (50 mW) |

General Data

Test voltage: Winding/contact
 Contact/contact
 Ambient temperature
 Nominal operating mode
 Mechanical service life
 Electrical service life
 Standards/specifications

 Approvals
 Mounting position/mounting

5 kV, 50 Hz, 1 minute
 2.5 kV, 50 Hz, 1 minute
 -40°C to +85°C (-40°F to +185°F)
 100% ED
 3 x 10⁷ cycles
 See diagram on page 5
 IEC 60 255/DIN VDE 0435 (in relevant parts), DIN EN 50 178/
 VDE 0160 (in relevant parts), EN 60 730/DIN VDE 0631,
 IEC 60 664/IEC 60 664 A/DIN VDE 0110, degree of pollution 3,
 Surge Voltage Category III
 UL; CSA; VDE
 Any/can be mounted without spacing

¹⁾ Alternative: For REL/KSR miniature switching relay, see INTERFACE catalog.


²⁾ If the specified maximum values are exceeded, the gold coating will be damaged. In subsequent operation, the maximum values given in brackets will apply. This can then result in reduced service life, similar to simple power contacts.

Diagrams for REL-MR... Miniature Power Relays

REL-MR...21HC... (SPDT Contact)


Operating voltage range

$$T_u = T_{coil}$$

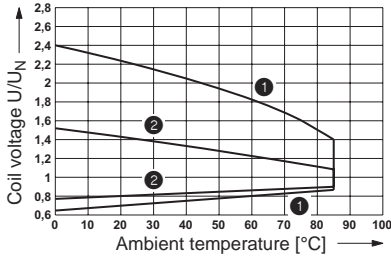


- 1 DC coils
- 2 AC coils

Shutdown power

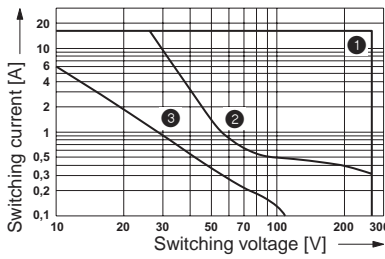

- 1 AC, ohmic load
- 2 DC, ohmic load
- 3 DC, L/R = 40 ms


Electrical service life

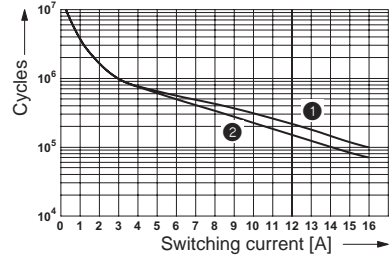

- 1 250 V AC, ohmic load (DC coils)
- 2 250 V AC, ohmic load (AC coils)

Service life reduction factor


with varying cos φ

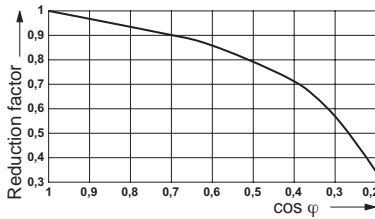

REL-MR...21-21... (DPDT Contacts)


Operating voltage range

$$T_u = T_{coil}$$

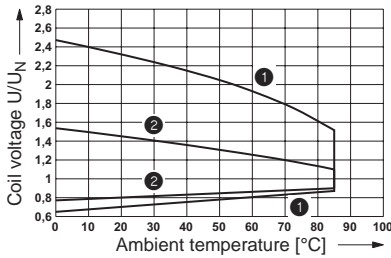


- 1 DC coils
- 2 AC coils

Shutdown power

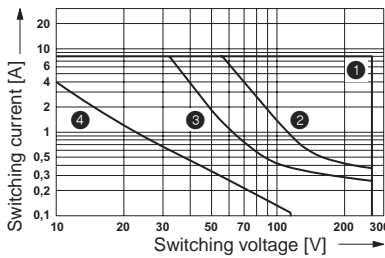

- 1 AC, ohmic load
- 2 DC, ohmic load, contacts in series
- 3 DC, ohmic load
- 4 DC, L/R = 40 ms


Electrical service life

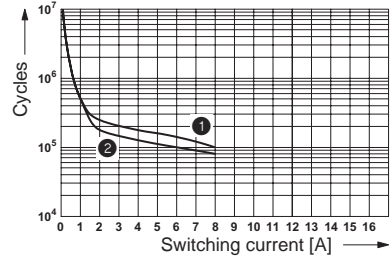

- 1 250 V AC, ohmic load (DC coils)
- 2 250 V AC, ohmic load (AC coils)

Service life reduction factor

with varying cos φ

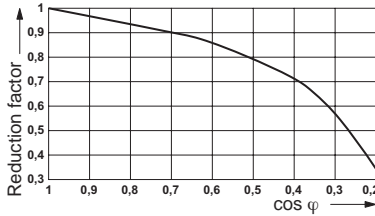

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкуренеспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru