





**Normally closed  
SOP8-pin type  
of 400V load voltage**

**PhotoMOS®  
GU SOP 2 Form B  
(AQW414S)**



mm inch



**RoHS compliant**

### FEATURES

**1. 2 channels in miniature SOP8-pin design**

The device comes in a super-miniature SO package measuring —approx. 38% of the volume and 66% of the footprint size of DIP8-pin type.

**2. Controls low-level analog signals**

PhotoMOS feature extremely low closed-circuit offset voltage to enable control of low-level analog signals without distortion.

**3. I/O isolation voltage of 1,500Vrms**

### TYPICAL APPLICATIONS

- Power supply
- Measuring instruments
- Security equipment
- Industrial robots
- Sensing equipment

### TYPES

|                | Output rating* |              | Package  | Part No.                         |                                  |          | Packing quantity   |               |
|----------------|----------------|--------------|----------|----------------------------------|----------------------------------|----------|--|---------------|
|                | Load voltage   | Load current |          | Through hole terminal            | Surface-mount terminal           |          | Tube   | Tape and reel |
|                |                |              |          | Tube packing style               | Tape and reel packing style      |          |  |               |
|                |                |              |          | Picked from the 1/2/3/4-pin side | Picked from the 5/6/7/8-pin side |          |  |               |
| AC/DC dual use | 400 V          | 80 mA        | SOP8-pin | AQW414S                          | AQW414SX                         | AQW414SZ | 1 tube contains:<br>50 pcs.<br>1 batch contains:<br>1,000 pcs. | 1,000 pcs     |

\*Indicate the peak AC and DC values.

Note: The packing style indicator "X" or "Z" are not marked on the device.

### RATING

**1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)**


|                         | Item                    | Symbol            | AQW414S                     | Remarks   |
|-------------------------|-------------------------|-------------------|-----------------------------|---|
| Input                   | LED forward current     | I <sub>F</sub>    | 50 mA                       |   |
|                         | LED reverse voltage     | V <sub>R</sub>    | 5 V                         |   |
|                         | Peak forward current    | I <sub>FP</sub>   | 1 A                         | f = 100 Hz, Duty factor = 0.1%                      |
|                         | Power dissipation       | P <sub>in</sub>   | 75 mW                       |   |
| Output                  | Load voltage (peak AC)  | V <sub>L</sub>    | 400 V                       |   |
|                         | Continuous load current | I <sub>L</sub>    | 0.08 A (0.1 A)              | Peak AC, DC<br>( ): in case of using only 1 channel |
|                         | Peak load current       | I <sub>peak</sub> | 0.24 A                      | 100 ms (1 shot), V <sub>L</sub> = DC                |
|                         | Power dissipation       | P <sub>out</sub>  | 600 mW                      |   |
| Total power dissipation |                         | P <sub>T</sub>    | 650 mW                      |   |
| I/O isolation voltage   |                         | V <sub>iso</sub>  | 1,500 Vrms                  |   |
| Ambient temperature     | Operating               | T <sub>opr</sub>  | -40 to +85°C -40 to +185°F  | (Non-icing at low temperatures)                     |
|                         | Storage                 | T <sub>stag</sub> | -40 to +100°C -40 to +212°F |   |

# GU SOP 2 Form B (AQW414S)

## 2. Electrical characteristics (Ambient temperature: 25°C 77°F)

| Item                             |                           | Symbol                                   | AQW414S          | Condition  |
|----------------------------------|---------------------------|--|------------------|--|
| Input                            | LED operate (OFF) current | Typical                                  | 0.9 mA           | $I_L = \text{Max.}$  |
|                                  |                           | Maximum                                  | 3 mA             |  |
|                                  | LED reverse (ON) current  | Minimum                                  | 0.4 mA           | $I_L = \text{Max.}$  |
|                                  |                           | Typical                                  | 0.8 mA           |  |
| LED dropout voltage              | Typical                   | 1.25 V (1.14 V at $I_F = 5 \text{ mA}$ ) |                  | $I_F = 50 \text{ mA}$  |
|                                  | Maximum                   | 1.5 V                                    |                  |  |
| Output                           | On resistance             | Typical                                  | 26 $\Omega$      | $I_F = 0 \text{ mA}$<br>$I_L = \text{Max.}$<br>Within 1 s            |
|                                  |                           | Maximum                                  | 50 $\Omega$      |  |
|                                  | Off state leakage current | Maximum                                  | 1 $\mu\text{A}$  | $I_F = 5 \text{ mA}$<br>$V_L = \text{Max.}$                          |
| Transfer characteristics         | Operate (OFF) time*       | Typical                                  | 0.43 ms          | $I_F = 0 \text{ mA} \rightarrow 5 \text{ mA}$<br>$I_L = \text{Max.}$ |
|                                  |                           | Maximum                                  | 1 ms             |  |
|                                  | Reverse (ON) time*        | Typical                                  | 0.3 ms           | $I_F = 5 \text{ mA} \rightarrow 0 \text{ mA}$<br>$I_L = \text{Max.}$ |
|                                  |                           | Maximum                                  | 1 ms             |  |
|                                  | I/O capacitance           | Typical                                  | 0.8 pF           | $f = 1 \text{ MHz}$<br>$V_B = 0 \text{ V}$                           |
| Maximum                          |                           | 1.5 pF                                   |                  |  |
| Initial I/O isolation resistance | Minimum                   | $R_{iso}$                                | 1,000 M $\Omega$ | 500 V DC   |

\*Operate/Reverse time

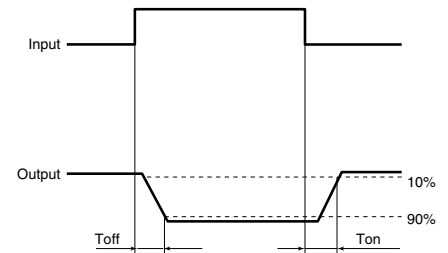

## 3. Recommended operating conditions (Ambient temperature: 25°C 77°F)

Please use under recommended operating conditions to obtain expected characteristics.

| Item                    | Symbol | Number of used channels | Min. | Max. | Unit |
|-------------------------|--------|-------------------------|------|------|------|
| LED current             | $I_F$  | 1ch<br>2ch              | 5    | 30   | mA   |
| Load voltage (Peak AC)  | $V_L$  |                         | —    | 320  | V    |
| Continuous load current | $I_L$  |                         | —    | 0.1  | 0.08 |


■ These products are not designed for automotive use.

If you are considering to use these products for automotive applications, please contact your local Panasonic Corporation technical representative.

## REFERENCE DATA


1. Load current vs. ambient temperature characteristics

Allowable ambient temperature: -40 to +85°C  
-40 to +185°F

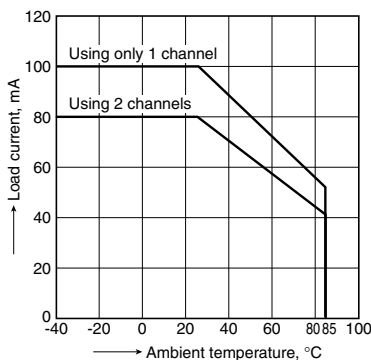


2. On resistance vs. ambient temperature characteristics

Measured portion: between terminals 5 and 6, 7 and 8;  
LED current: 0 mA; Load voltage: Max. (DC);  
Continuous load current: Max. (DC)

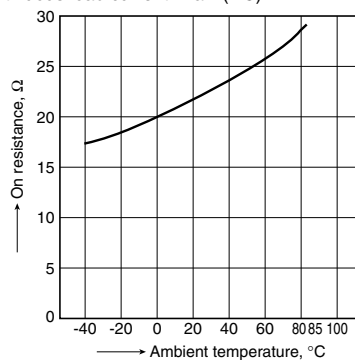


3. Operate (OFF) time vs. ambient temperature characteristics

LED current: 5 mA;  
Load voltage: Max. (DC);  
Continuous load current: Max. (DC)

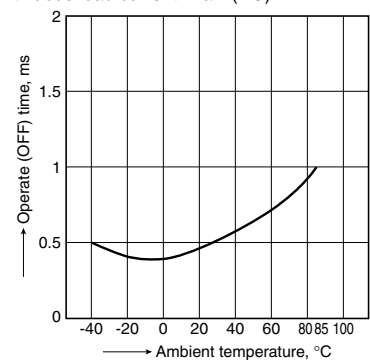


4. Reverse (ON) time vs. ambient temperature characteristics

LED current: 5 mA; Load voltage: Max. (DC);  
Continuous load current: Max. (DC)

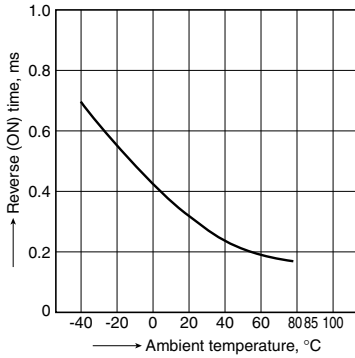


5. LED operate (OFF) current vs. ambient temperature characteristics

Load voltage: Max. (DC);  
Continuous load current: Max. (DC)

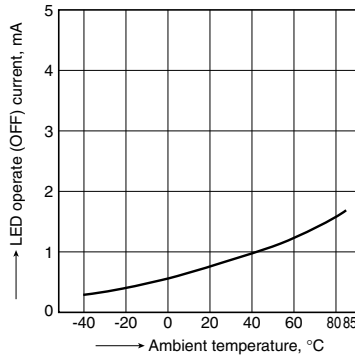


6. LED reverse (ON) current vs. ambient temperature characteristics

Load voltage: Max. (DC);  
Continuous load current: Max. (DC)

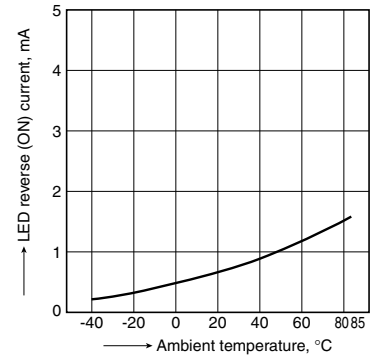


7. LED dropout voltage vs. ambient temperature characteristics

LED current: 5 to 50 mA

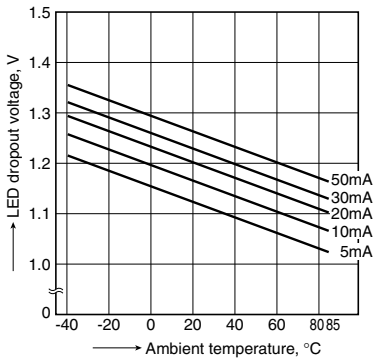


8. Current vs. voltage characteristics of output at MOS portion

Measured portion: between terminals 5 and 6, 7 and 8;  
Ambient temperature: 25°C 77°F




9. Off state leakage current vs. load voltage characteristics

Measured portion: between terminals 5 and 6, 7 and 8;  
LED current: 5 mA; Ambient temperature: 25°C 77°F

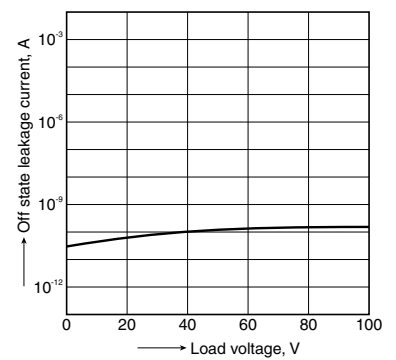


10. Operate (OFF) time vs. LED forward current characteristics

Measured portion: between terminals 5 and 6, 7 and 8;  
Load voltage: Max. (DC);  
Continuous load current: Max. (DC);  
Ambient temperature: 25°C 77°F

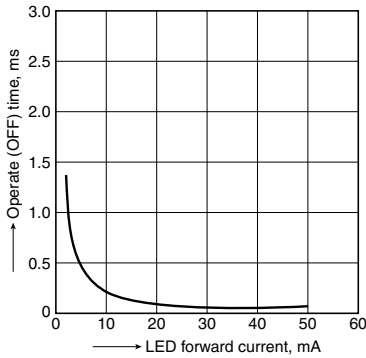


11. Reverse (ON) time vs. LED forward current characteristics

Measured portion: between terminals 5 and 6, 7 and 8;  
Load voltage: Max. (DC);  
Continuous load current: Max. (DC);  
Ambient temperature: 25°C 77°F

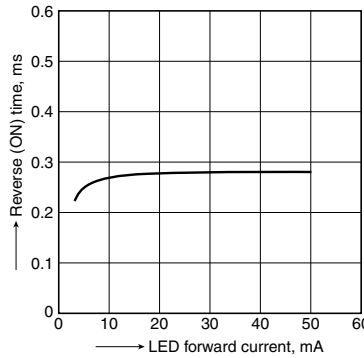

12. Output capacitance vs. applied voltage characteristics

Measured portion: between terminals 5 and 6, 7 and 8;  
LED current: 5 mA;  
Frequency: 1 MHz;  
Ambient temperature: 25°C 77°F

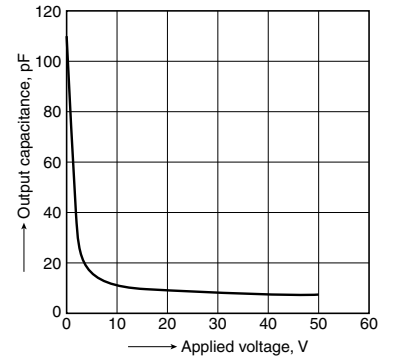

"PhotoMOS®", "PhotoMOS" and "PHOTOMOS" are registered trademarks of Panasonic Corporation.

\*Recognized in Japan, the United States, all member states of European Union and other countries.

Please contact .....

---

**Panasonic Corporation**

Electromechanical Control Business Division

■ 1006, Oaza Kadoma, Kadoma-shi, Osaka 571-8506, Japan  
[industrial.panasonic.com/ac/e/](http://industrial.panasonic.com/ac/e/)

**Panasonic®**

©Panasonic Corporation 2017

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Panasonic:](#)

[AQW414S](#)

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)