



DIP8-pin type featuring low on-resistance with 200V/400V load voltage

PhotoMOS®

RF 2 Form A

Low on-resistance (AQW22ON)

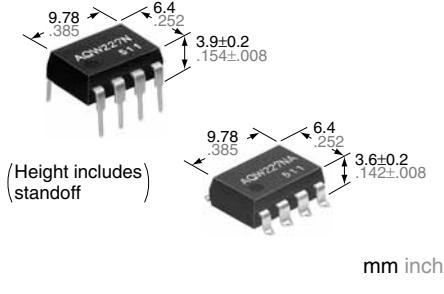

RoHS compliant

FEATURES

1. 2-channels (Form A) type with high response speed, low leakage current and low on-resistance.
2. Applicable for 2 Form A use as well as two independent 1 Form A use
3. Low capacitance between output terminals ensures high response speed:

The capacitance between output terminals is small; typ. 10 pF. This enables for a fast operation speed of typ. 0.2 ms.

4. High sensitivity and low on-resistance:
5. Max. 0.07 A of load current can be controlled with input current of 5 mA. The on-resistance is less than our conventional models.
6. Low-level off state leakage current
7. Controls low-level analog signals: PhotoMOS features extremely low closed-circuit offset voltages to enable control of small analog signals without distortion.

TYPICAL APPLICATIONS

- Measuring instruments
Scanner, IC checker, Board tester, etc.

TYPES

	Output rating*		Package	Part No.			Packing quantity	
				Through hole terminal	Surface-mount terminal			
	Load voltage	Load current		Tube packing style	Picked from the 1/2/3-pin side	Picked from the 4/5/6-pin side	Tube	Tape and reel
AC/DC dual use	200 V	50 mA	DIP8-pin	AQW227N	AQW227NA	AQW227NAX	AQW227NAZ	1 tube contains: 50 pcs. 1 batch contains: 500 pcs.
	400 V	40 mA		AQW224N	AQW224NA	AQW224NAX	AQW224NAZ	

*Indicate the peak AC and DC values.

Note: The surface mount terminal indicator "A" and the packing style indicator "X" or "Z" are not marked on the device.

RATING

1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)

Item		Symbol	AQW227N(A)		AQW224N(A)	Remarks
Input	LED forward current	I _F		50 mA		
	LED reverse voltage	V _R		5 V		
	Peak forward current	I _{FP}		1 A		f = 100 Hz, Duty factor = 0.1%
	Power dissipation	P _{in}		75 mW		
Output	Load voltage (peak AC)	V _L	200 V		400 V	
	Continuous load current	I _L	0.05 A (0.07 A)		0.04 A (0.05 A)	Peak AC, DC (): in case of using only 1 channel
	Peak load current	I _{peak}	0.15 A		0.12 A	A connection: 100 ms (1 shot), V _L = DC
	Power dissipation	P _{out}		800 mW		
Total power dissipation		P _T		850 mW		
I/O isolation voltage		V _{iso}		1,500 V AC		
Temperature limits	Operating	T _{opr}		−40°C to +85°C	−40°F to +185°F	Non-condensing at low temperatures
	Storage	T _{stg}		−40°C to +100°C	−40°F to +212°F	


RF 2 Form A Low on-resistance (AQW22ON)

2. Electrical characteristics (Ambient temperature: 25°C 77°F)

Item		Symbol	AQW227N(A)	AQW224N(A)	Remarks
Input	LED operate current	Typical Maximum	I_{Fon}	0.9 mA 3.0 mA	$I_L = \text{Max.}$
	LED turn off current			0.4 mA 0.8 mA	
	LED dropout voltage	Typical Maximum	V_F	1.25 V (1.14 V at $I_F = 5 \text{ mA}$) 1.5 V	$I_F = 50 \text{ mA}$
	On resistance	Typical Maximum	R_{on}	30 Ω 50 Ω	$I_F = 5 \text{ mA}$ $I_L = \text{Max.}$ Within 1 s on time
Output	Output capacitance	Typical Maximum	C_{out}	10 pF 15 pF	$I_F = 0$ $V_B = 0$ $f = 1 \text{ MHz}$
	Off state leakage current	Maximum		I_{Leak}	
Transfer characteristics	Turn on time**	Typical Maximum	T_{on}	0.2 ms 0.5 ms	$I_F = 5 \text{ mA}$ $I_L = \text{Max.}$
	Turn off time**	Typical Maximum		0.08 ms 0.2 ms	
	I/O capacitance	Typical Maximum	C_{iso}	0.8 pF 1.5 pF	$f = 1 \text{ MHz}$ $V_B = 0$
	Initial I/O isolation resistance	Minimum		R_{iso}	

*Available as custom orders (1 nA or less)

**Turn on/Turn off time

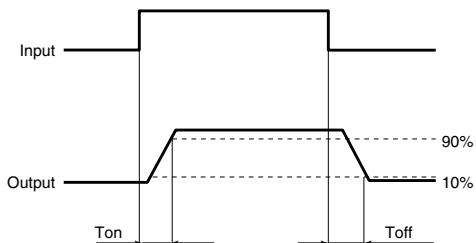

RECOMMENDED OPERATING CONDITIONS

Please obey the following conditions to ensure proper device operation and resetting.

Item	Symbol	Recommended value	Unit
Input LED current	I_F	5	mA

■ These products are not designed for automotive use.


If you are considering to use these products for automotive applications, please contact your local Panasonic Corporation technical representative.

REFERENCE DATA

1. Load current vs. ambient temperature characteristics


Allowable ambient temperature: -40°C to +85°C
-40°F to +185°F

When using 2 channels

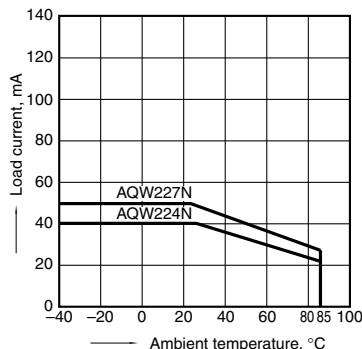


2. On resistance vs. ambient temperature characteristics

Measured portion: between terminals 5 and 6, 7 and 8; LED current: 5 mA; Load voltage: Max. (DC); Continuous load current: Max. (DC)

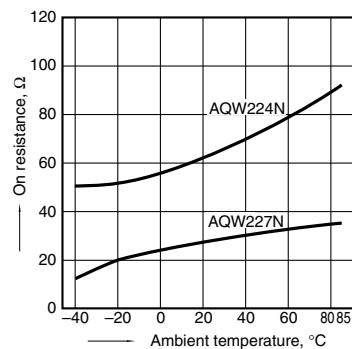

3. Turn on time vs. ambient temperature characteristics


LED current: 5 mA; Load voltage: Max. (DC); Continuous load current: Max. (DC)

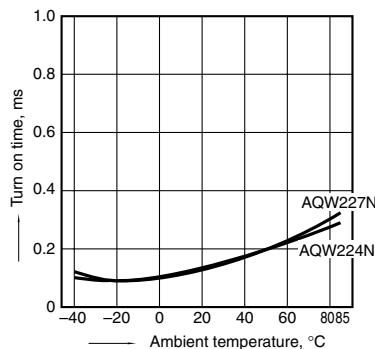

RF 2 Form A Low on-resistance (AQW22ON)


4. Turn off time vs. ambient temperature characteristics

LED current: 5 mA; Load voltage: Max. (DC); Continuous load current: Max. (DC)

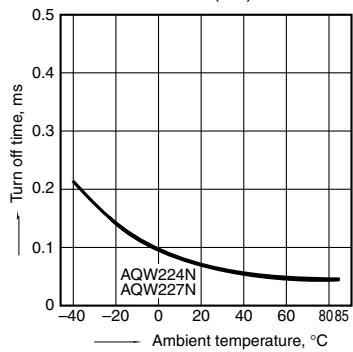


5. LED operate current vs. ambient temperature characteristics

Load voltage: Max. (DC); Continuous load current: Max. (DC)

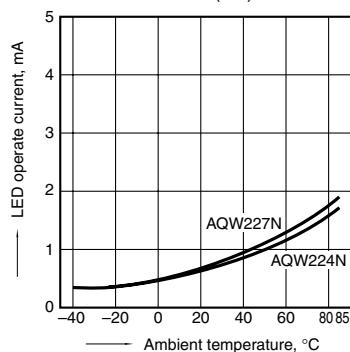


6. LED turn off current vs. ambient temperature characteristics

Load voltage: Max. (DC); Continuous load current: Max. (DC)

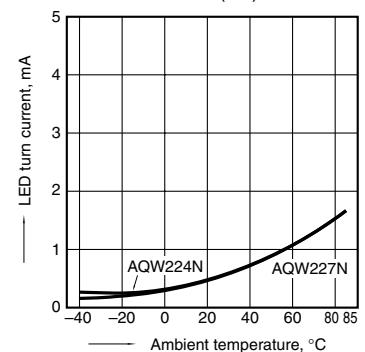


7. LED dropout voltage vs. ambient temperature characteristics

Sample: All types;
LED current: 5 to 50 mA

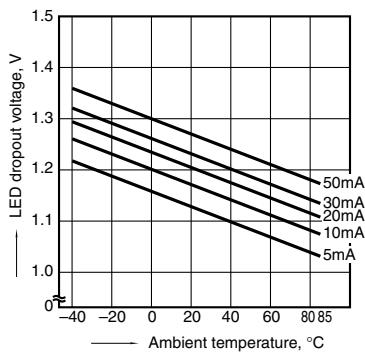


8. Voltage vs. current characteristics of output at MOS portion

Measured portion: between terminals 5 and 6, 7 and 8; Ambient temperature: 25°C 77°F




9. Off state leakage current

Measured portion: between terminals 5 and 6, 7 and 8;
Ambient temperature: 25°C 77°F

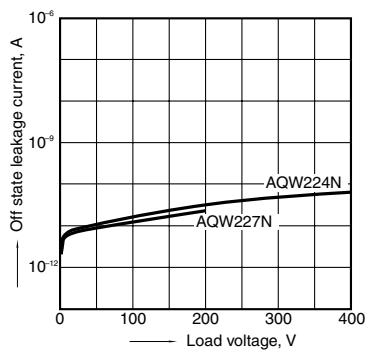


10. LED forward current vs. turn on time characteristics

Measured portion: between terminals 5 and 6, 7 and 8; Load voltage: Max. (DC); Continuous load current: Max. (DC); Ambient temperature: 25°C 77°F

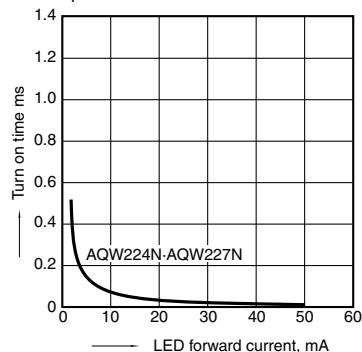


11. LED forward current vs. turn off time characteristics

Measured portion: between terminals 5 and 6, 7 and 8; Load voltage: Max. (DC); Continuous load current: Max. (DC); Ambient temperature: 25°C 77°F

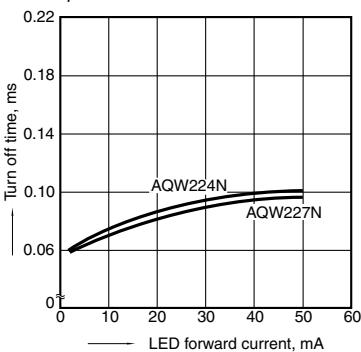

12. Applied voltage vs. output capacitance characteristics


Measured portion: between terminals 5 and 6, 7 and 8; Frequency: 1 MHz, 30 mVRms; Ambient temperature: 25°C 77°F

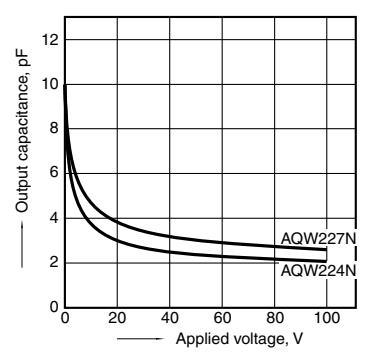

13. Isolation characteristics

(50 Ω impedance)


Measured portion: between terminals 5 and 6, 7 and 8;
Ambient temperature: 25°C 77°F

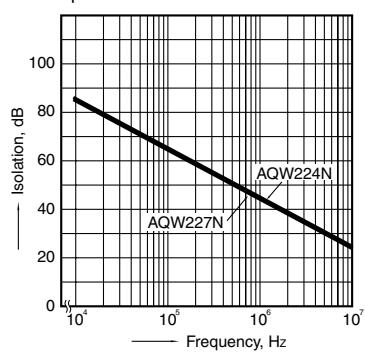

14. Insertion loss characteristics

(50 Ω impedance)

Measured portion: between terminals 5 and 6, 7 and 8;
Ambient temperature: 25°C 77°F

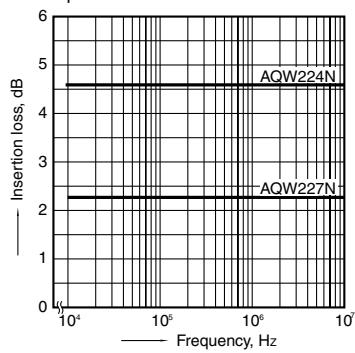

ООО "ЛайфЭлектроникс"

"LifeElectronics" LLC

ИНН 7805602321 КПП 780501001 Р/С 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 30101810900000000703 БИК 044030703

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибуторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибуторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помочь разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)
Email: org@lifeelectronics.ru