


### ADG506A/ADG507A

#### FEATURES

**44 V Supply Maximum Rating**  
 **$V_{SS}$  to  $V_{DD}$  Analog Signal Range**  
**Single/Dual Supply Specifications**  
**Wide Supply Ranges (10.8 V to 16.5 V)**  
**Extended Plastic Temperature Range**  
 (–40°C to +85°C)  
**Low Power Dissipation (28 mW max)**  
**Low Leakage (20 pA typ)**  
**Available in 28-Lead DIP, SOIC, PLCC, TSSOP and LCCC Packages**  
**Superior Alternative to:**  
 DG506A, HI-506  
 DG507A, HI-507

#### FUNCTIONAL BLOCK DIAGRAM

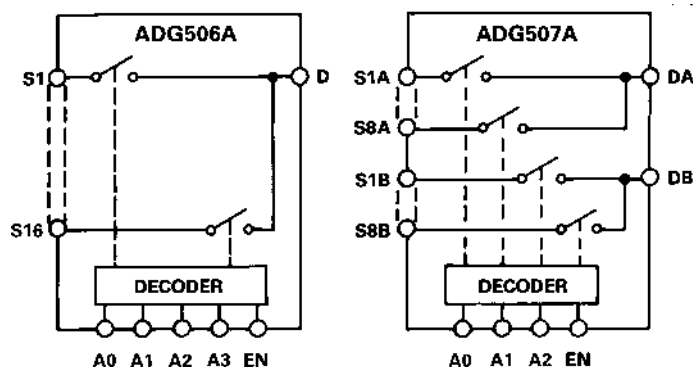

#### GENERAL DESCRIPTION

The ADG506A and ADG507A are CMOS monolithic analog multiplexers with 16 channels and dual 8 channels, respectively. The ADG506A switches one of 16 inputs to a common output, depending on the state of four binary addresses and an enable input. The ADG507A switches one of eight differential inputs to a common differential output, depending on the state of three binary addresses and an enable input. Both devices have TTL and 5 V CMOS logic compatible digital inputs.

The ADG506A and ADG507A are designed on an enhanced LC<sup>2</sup>MOS process, which gives an increased signal capability of  $V_{SS}$  to  $V_{DD}$  and enables operation over a wide range of supply voltages. The devices can operate comfortably anywhere in the 10.8 V to 16.5 V single or dual supply range. These multiplexers also feature high switching speeds and low  $R_{ON}$ .

#### PRODUCT HIGHLIGHTS

- Single/Dual Supply Specifications with a Wide Tolerance**  
The devices are specified in the 10.8 V to 16.5 V range for both single and dual supplies.
- Extended Signal Range**  
The enhanced LC<sup>2</sup>MOS processing results in a high break-down and an increased analog signal range of  $V_{SS}$  to  $V_{DD}$ .
- Break-Before-Make Switching**  
Switches are guaranteed break-before-make so input signals are protected against momentary shorting.
- Low Leakage**  
Leakage currents in the range of 20 pA make these multiplexers suitable for high precision circuits.

#### ORDERING GUIDE

| Model <sup>1</sup> | Temperature Range | Package Option <sup>2</sup> |
|--------------------|-------------------|-----------------------------|
| ADG506AKN          | –40°C to +85°C    | N-28                        |
| ADG506AKR          | –40°C to +85°C    | R-28                        |
| ADG506AKP          | –40°C to +85°C    | P-28A                       |
| ADG506ABQ          | –40°C to +85°C    | Q-28                        |
| ADG506ATQ          | –55°C to +125°C   | Q-28                        |
| ADG506ATE          | –55°C to +125°C   | E-28A                       |
| ADG507AKN          | –40°C to +85°C    | N-28                        |
| ADG507AKR          | –40°C to +85°C    | R-28                        |
| ADG507AKP          | –40°C to +85°C    | P-28A                       |
| ADG507AKRU         | –40°C to +85°C    | RU-28                       |
| ADG507ABQ          | –40°C to +85°C    | Q-28                        |
| ADG507ATQ          | –55°C to +125°C   | Q-28                        |
| ADG507ATE          | –55°C to +125°C   | E-28A                       |

#### NOTES

<sup>1</sup>To order MIL-STD-883, Class B processed parts, add /883B to part number. See Analog Devices' *Military/Aerospace Reference Manual* (1994) for military data sheet.

<sup>2</sup>E = Leadless Ceramic Chip Carrier (LCCC); N = Plastic DIP; P = Plastic Leaded Chip Carrier (PLCC); Q = Cerdip; R = 0.3" Small Outline IC (SOIC); RU = Thin Shrink Small Outline Package (TSSOP).

#### REV. C

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices.

# ADG506A/ADG507A—SPECIFICATIONS

**Dual Supply** ( $V_{DD} = +10.8 \text{ V}$  to  $+16.5 \text{ V}$ ,  $V_{SS} = -10.8 \text{ V}$  to  $-16.5 \text{ V}$  unless otherwise noted)

|                                                                    | ADG506A<br>ADG507A<br>K Version<br>−40°C to |                 | ADG506A<br>ADG507A<br>B Version<br>−40°C to |                 | ADG506A<br>ADG507A<br>T Version<br>−55°C to |                 |          |                                                                                                                  |
|--------------------------------------------------------------------|---------------------------------------------|-----------------|---------------------------------------------|-----------------|---------------------------------------------|-----------------|----------|------------------------------------------------------------------------------------------------------------------|
| Parameter                                                          | +25°C                                       | +85°C           | +25°C                                       | +85°C           | +25°C                                       | +125°C          | Units    | Comments                                                                                                         |
| ANALOG SWITCH                                                      |                                             |                 |                                             |                 |                                             |                 |          |                                                                                                                  |
| Analog Signal Range                                                | V <sub>SS</sub>                             | V <sub>SS</sub> | V <sub>SS</sub>                             | V <sub>SS</sub> | V <sub>SS</sub>                             | V <sub>SS</sub> | V min    | −10 V ≤ V <sub>S</sub> ≤ +10 V, I <sub>DS</sub> = 1 mA; Test Circuit 1                                           |
| R <sub>ON</sub>                                                    | V <sub>DD</sub>                             | V <sub>DD</sub> | V <sub>DD</sub>                             | V <sub>DD</sub> | V <sub>DD</sub>                             | V <sub>DD</sub> | V max    |                                                                                                                  |
|                                                                    | 280                                         |                 | 280                                         |                 | 280                                         |                 | Ω typ    |                                                                                                                  |
|                                                                    | 450                                         | 600             | 450                                         | 600             | 450                                         | 600             | Ω max    |                                                                                                                  |
|                                                                    | 300                                         | 400             | 300                                         | 400             |                                             |                 | Ω max    |                                                                                                                  |
| R <sub>ON</sub> Drift                                              |                                             |                 |                                             |                 | 300                                         | 400             | Ω max    | V <sub>DD</sub> = 15 V (±10%), V <sub>SS</sub> = −15 V (±10%)                                                    |
| R <sub>ON</sub> Match                                              | 0.6                                         |                 | 0.6                                         |                 | 0.6                                         |                 | %/°C typ | V <sub>DD</sub> = 15 V (±5%), V <sub>SS</sub> = −15 V (±5%)                                                      |
|                                                                    | 5                                           |                 | 5                                           |                 | 5                                           |                 | % typ    | −10 V ≤ V <sub>S</sub> ≤ +10 V, I <sub>DS</sub> = 1 mA                                                           |
| I <sub>S</sub> (OFF), Off Input Leakage                            | 0.02                                        |                 | 0.02                                        |                 | 0.02                                        |                 | nA typ   | V1 = ±10 V, V2 = ∓10 V; Test Circuit 2                                                                           |
|                                                                    | 1                                           | 50              | 1                                           | 50              | 1                                           | 50              | nA max   |                                                                                                                  |
| I <sub>D</sub> (OFF), Off Output Leakage                           | 0.04                                        |                 | 0.04                                        |                 | 0.04                                        |                 | nA typ   | V1 = ±10 V, V2 = ∓10 V; Test Circuit 3                                                                           |
| ADG506A                                                            | 1                                           | 200             | 1                                           | 200             | 1                                           | 200             | nA max   |                                                                                                                  |
| ADG507A                                                            | 1                                           | 100             | 1                                           | 100             | 1                                           | 100             | nA max   | V1 = ±10 V, V2 = ∓10 V; Test Circuit 4                                                                           |
| I <sub>D</sub> (ON), On Channel Leakage                            | 0.04                                        |                 | 0.04                                        |                 | 0.04                                        |                 | nA typ   |                                                                                                                  |
| ADG506A                                                            | 1                                           | 200             | 1                                           | 200             | 1                                           | 200             | nA max   |                                                                                                                  |
| ADG507A                                                            | 1                                           | 100             | 1                                           | 100             | 1                                           | 100             | nA max   |                                                                                                                  |
| I <sub>DIFF</sub> , Differential Off Output Leakage (ADG507A Only) |                                             | 25              |                                             | 25              |                                             | 25              | nA max   | V1 = ±10 V, V2 = ∓10 V; Test Circuit 5                                                                           |
| DIGITAL CONTROL                                                    |                                             |                 |                                             |                 |                                             |                 |          |                                                                                                                  |
| V <sub>INH</sub> , Input High Voltage                              |                                             | 2.4             |                                             | 2.4             |                                             | 2.4             | V min    | V <sub>IN</sub> = 0 to V <sub>DD</sub>                                                                           |
| V <sub>INL</sub> , Input Low Voltage                               |                                             | 0.8             |                                             | 0.8             |                                             | 0.8             | V max    |                                                                                                                  |
| I <sub>INL</sub> or I <sub>INH</sub>                               |                                             | 1               |                                             | 1               |                                             | 1               | μA max   |                                                                                                                  |
| C <sub>IN</sub> Digital Input Capacitance                          | 8                                           |                 | 8                                           |                 | 8                                           |                 | pF max   |                                                                                                                  |
| DYNAMIC CHARACTERISTICS                                            |                                             |                 |                                             |                 |                                             |                 |          |                                                                                                                  |
| t <sub>TRANSITION</sub> <sup>1</sup>                               | 200                                         |                 | 200                                         |                 | 200                                         |                 | ns typ   | V1 = ±10 V, V2 = +10 V; Test Circuit 6                                                                           |
|                                                                    | 300                                         | 400             | 300                                         | 400             | 300                                         | 400             | ns max   |                                                                                                                  |
| t <sub>OPEN</sub> <sup>1</sup>                                     | 50                                          |                 | 50                                          |                 | 50                                          |                 | ns typ   | Test Circuit 7                                                                                                   |
|                                                                    | 25                                          | 10              | 25                                          | 10              | 25                                          | 10              | ns min   |                                                                                                                  |
| t <sub>ON</sub> (EN) <sup>1</sup>                                  | 200                                         |                 | 200                                         |                 | 200                                         |                 | ns typ   | Test Circuit 8                                                                                                   |
|                                                                    | 300                                         | 400             | 300                                         | 400             | 300                                         | 400             | ns max   |                                                                                                                  |
| t <sub>OFF</sub> (EN) <sup>1</sup>                                 | 200                                         |                 | 200                                         |                 | 200                                         |                 | ns typ   | Test Circuit 8                                                                                                   |
|                                                                    | 300                                         | 400             | 300                                         | 400             | 300                                         | 400             | ns max   |                                                                                                                  |
| OFF Isolation                                                      | 68                                          |                 | 68                                          |                 | 68                                          |                 | dB typ   | V <sub>EN</sub> = 0.8 V, R <sub>L</sub> = 1 kΩ, C <sub>L</sub> = 15 pF,<br>V <sub>S</sub> = 7 V rms, f = 100 kHz |
|                                                                    | 50                                          |                 | 50                                          |                 | 50                                          |                 | dB min   |                                                                                                                  |
| C <sub>S</sub> (OFF)                                               | 5                                           |                 | 5                                           |                 | 5                                           |                 | pF typ   |                                                                                                                  |
| C <sub>D</sub> (OFF)                                               |                                             |                 |                                             |                 |                                             |                 |          | V <sub>EN</sub> = 0.8 V                                                                                          |
| ADG506A                                                            | 44                                          |                 | 44                                          |                 | 44                                          |                 | pF typ   |                                                                                                                  |
| ADG507A                                                            | 22                                          |                 | 22                                          |                 | 22                                          |                 | pF typ   | R <sub>S</sub> = 0 Ω, V <sub>S</sub> = 0 V; Test Circuit 9                                                       |
| Q <sub>INJ</sub> , Charge Injection                                | 4                                           |                 | 4                                           |                 | 4                                           |                 | pC typ   |                                                                                                                  |
| POWER SUPPLY                                                       |                                             |                 |                                             |                 |                                             |                 |          |                                                                                                                  |
| I <sub>DD</sub>                                                    | 0.6                                         |                 | 0.6                                         |                 | 0.6                                         |                 | mA typ   | V <sub>IN</sub> = V <sub>INL</sub> or V <sub>INH</sub>                                                           |
|                                                                    |                                             | 1.5             |                                             | 1.5             |                                             | 1.5             | mA max   |                                                                                                                  |
| I <sub>SS</sub>                                                    | 20                                          |                 | 20                                          |                 | 20                                          |                 | μA typ   | V <sub>IN</sub> = V <sub>IN</sub> or V <sub>INH</sub>                                                            |
|                                                                    |                                             | 0.2             |                                             | 0.2             |                                             | 0.2             | mA max   |                                                                                                                  |
| Power Dissipation                                                  | 10                                          |                 | 10                                          |                 | 10                                          |                 | mW typ   |                                                                                                                  |
|                                                                    |                                             | 28              |                                             | 28              |                                             | 28              | mW max   |                                                                                                                  |

## NOTES

<sup>1</sup>Sample tested at +25°C to ensure compliance.

Specifications subject to change without notice.

Single Supply ( $V_{DD} = +10.8 \text{ V to } +16.5 \text{ V}$ ,  $V_{SS} = \text{GND} = 0 \text{ V}$  unless otherwise noted)

|                                                                    | ADG506A<br>ADG507A<br>K Version |                   | ADG506A<br>ADG507A<br>B Version |                   | ADG506A<br>ADG507A<br>T Version |                    |          |                                                                                                                                               |
|--------------------------------------------------------------------|---------------------------------|-------------------|---------------------------------|-------------------|---------------------------------|--------------------|----------|-----------------------------------------------------------------------------------------------------------------------------------------------|
| Parameter                                                          | +25°C                           | -40°C to<br>+85°C | +25°C                           | -40°C to<br>+85°C | +25°C                           | -55°C to<br>+125°C | Units    | Comments                                                                                                                                      |
| ANALOG SWITCH                                                      |                                 |                   |                                 |                   |                                 |                    |          |                                                                                                                                               |
| Analog Signal Range                                                | V <sub>SS</sub>                 | V <sub>SS</sub>   | V <sub>SS</sub>                 | V <sub>SS</sub>   | V <sub>SS</sub>                 | V <sub>SS</sub>    | V min    | 0 V ≤ V <sub>S</sub> ≤ +10 V, I <sub>DS</sub> = 0.5 mA; Test Circuit 1                                                                        |
| R <sub>ON</sub>                                                    | V <sub>DD</sub>                 | V <sub>DD</sub>   | V <sub>DD</sub>                 | V <sub>DD</sub>   | V <sub>DD</sub>                 | V <sub>DD</sub>    | V max    |                                                                                                                                               |
|                                                                    | 500                             |                   | 500                             |                   | 500                             |                    | Ω typ    |                                                                                                                                               |
|                                                                    | 700                             | 1000              | 700                             | 1000              | 700                             | 1000               | Ω max    |                                                                                                                                               |
| R <sub>ON</sub> Drift                                              | 0.6                             |                   | 0.6                             |                   | 0.6                             |                    | %/°C typ | 0 V ≤ V <sub>S</sub> ≤ +10 V, I <sub>DS</sub> = 0.5 mA                                                                                        |
| R <sub>ON</sub> Match                                              | 5                               |                   | 5                               |                   | 5                               |                    | % typ    | 0 V ≤ V <sub>S</sub> ≤ +10 V, I <sub>DS</sub> = 0.5 mA                                                                                        |
| I <sub>S</sub> (OFF), Off Input Leakage                            | 0.02                            |                   | 0.02                            |                   | 0.02                            |                    | nA typ   | V1 = +10 V/0 V, V2 = 0 V/ +10 V;<br>Test Circuit 2                                                                                            |
|                                                                    | 1                               | 50                | 1                               | 50                | 1                               | 50                 | nA max   |                                                                                                                                               |
| I <sub>D</sub> (OFF), Off Output Leakage                           | 0.04                            |                   | 0.04                            |                   | 0.04                            |                    | nA typ   | V1 = +10 V/0 V, V2 = 0 V/ +10 V;<br>Test Circuit 3                                                                                            |
| ADG506A                                                            | 1                               | 200               | 1                               | 200               | 1                               | 200                | nA max   |                                                                                                                                               |
| ADG507A                                                            | 1                               | 100               | 1                               | 100               | 1                               | 100                | nA max   |                                                                                                                                               |
| I <sub>D</sub> (ON), On Channel Leakage                            | 0.04                            |                   | 0.04                            |                   | 0.04                            |                    | nA typ   | V1 = +10 V/0 V, V2 = 0 V/ +10 V;<br>Test Circuit 4                                                                                            |
| ADG506A                                                            | 1                               | 200               | 1                               | 200               | 1                               | 200                | nA max   |                                                                                                                                               |
| ADG507A                                                            | 1                               | 100               | 1                               | 100               | 1                               | 100                | nA max   |                                                                                                                                               |
| I <sub>DIFF</sub> , Differential Off Output Leakage (ADG507A Only) |                                 | 25                |                                 | 25                |                                 | 25                 | nA max   | V1 = +10 V/0 V, V2 = 0 V/ +10 V;<br>Test Circuit 5                                                                                            |
| DIGITAL CONTROL                                                    |                                 |                   |                                 |                   |                                 |                    |          |                                                                                                                                               |
| V <sub>INH</sub> , Input High Voltage                              |                                 | 2.4               |                                 | 2.4               |                                 | 2.4                | V min    | V <sub>IN</sub> = 0 to V <sub>DD</sub>                                                                                                        |
| V <sub>INL</sub> , Input Low Voltage                               |                                 | 0.8               |                                 | 0.8               |                                 | 0.8                | V max    |                                                                                                                                               |
| I <sub>INL</sub> or I <sub>INH</sub>                               |                                 | 1                 |                                 | 1                 |                                 | 1                  | μA max   |                                                                                                                                               |
| C <sub>IN</sub> Digital Input Capacitance                          | 8                               |                   | 8                               |                   | 8                               |                    | pF max   |                                                                                                                                               |
| DYNAMIC CHARACTERISTICS                                            |                                 |                   |                                 |                   |                                 |                    |          |                                                                                                                                               |
| t <sub>TRANSITION</sub> <sup>1</sup>                               | 300                             |                   | 300                             |                   | 300                             |                    | ns typ   | V1 = +10 V/0 V, V2 = +10 V; Test Circuit 6                                                                                                    |
|                                                                    | 450                             | 600               | 450                             | 600               | 450                             | 600                | ns max   |                                                                                                                                               |
| t <sub>OPEN</sub> <sup>1</sup>                                     | 50                              |                   | 50                              |                   | 50                              |                    | ns typ   | Test Circuit 7                                                                                                                                |
|                                                                    | 25                              | 10                | 25                              | 10                | 25                              | 10                 | ns min   |                                                                                                                                               |
| t <sub>ON</sub> (EN) <sup>1</sup>                                  | 250                             |                   | 250                             |                   | 250                             |                    | ns typ   | Test Circuit 8                                                                                                                                |
|                                                                    | 450                             | 600               | 450                             | 600               | 450                             | 600                | ns max   |                                                                                                                                               |
| t <sub>OFF</sub> (EN) <sup>1</sup>                                 | 250                             |                   | 250                             |                   | 250                             |                    | ns typ   | Test Circuit 8                                                                                                                                |
|                                                                    | 450                             | 600               | 450                             | 600               | 450                             | 600                | ns max   |                                                                                                                                               |
| OFF Isolation                                                      | 68                              |                   | 68                              |                   | 68                              |                    | dB typ   | V <sub>EN</sub> = 0.8 V, R <sub>L</sub> = 1 kΩ, C <sub>L</sub> = 15 pF,<br>V <sub>S</sub> = 3.5 V rms, f = 100 kHz<br>V <sub>EN</sub> = 0.8 V |
|                                                                    | 50                              |                   | 50                              |                   | 50                              |                    | dB min   |                                                                                                                                               |
| C <sub>S</sub> (OFF)                                               | 5                               |                   | 5                               |                   | 5                               |                    | pF typ   |                                                                                                                                               |
| C <sub>D</sub> (OFF)                                               |                                 |                   |                                 |                   |                                 |                    |          |                                                                                                                                               |
| ADG506A                                                            | 44                              |                   | 44                              |                   | 44                              |                    | pF typ   | V <sub>EN</sub> = 0.8 V                                                                                                                       |
| ADG507A                                                            | 22                              |                   | 22                              |                   | 22                              |                    | pF typ   |                                                                                                                                               |
| Q <sub>INJ</sub> , Charge Injection                                | 4                               |                   | 4                               |                   | 4                               |                    | pC typ   | R <sub>S</sub> = 0 Ω, V <sub>S</sub> = 0 V; Test Circuit 9                                                                                    |
| POWER SUPPLY                                                       |                                 |                   |                                 |                   |                                 |                    |          |                                                                                                                                               |
| I <sub>DD</sub>                                                    | 0.6                             |                   | 0.6                             |                   | 0.6                             |                    | mA typ   | V <sub>IN</sub> = V <sub>INL</sub> or V <sub>INH</sub>                                                                                        |
|                                                                    |                                 | 1.5               |                                 | 1.5               |                                 | 1.5                | mA max   |                                                                                                                                               |
| Power Dissipation                                                  | 10                              |                   | 10                              |                   | 10                              |                    | mW typ   |                                                                                                                                               |
|                                                                    |                                 | 25                |                                 | 25                |                                 | 25                 | mW max   |                                                                                                                                               |

## NOTES

<sup>1</sup>Sample tested at +25°C to ensure compliance.

Specifications subject to change without notice.

Truth Table (ADG506A)

| A3 | A2 | A1 | A0 | EN | On Switch |
|----|----|----|----|----|-----------|
| X  | X  | X  | X  | 0  | NONE      |
| 0  | 0  | 0  | 0  | 1  | 1         |
| 0  | 0  | 0  | 1  | 1  | 2         |
| 0  | 0  | 1  | 0  | 1  | 3         |
| 0  | 0  | 1  | 1  | 1  | 4         |
| 0  | 1  | 0  | 0  | 1  | 5         |
| 0  | 1  | 0  | 1  | 1  | 6         |
| 0  | 1  | 1  | 0  | 1  | 7         |
| 0  | 1  | 1  | 1  | 1  | 8         |
| 1  | 0  | 0  | 0  | 1  | 9         |
| 1  | 0  | 0  | 1  | 1  | 10        |
| 1  | 0  | 1  | 0  | 1  | 11        |
| 1  | 0  | 1  | 1  | 1  | 12        |
| 1  | 1  | 0  | 0  | 1  | 13        |
| 1  | 1  | 0  | 1  | 1  | 14        |
| 1  | 1  | 1  | 0  | 1  | 15        |
| 1  | 1  | 1  | 1  | 1  | 16        |

Truth Table (ADG507A)

| A2 | A1 | A0 | EN | On Switch Pair |
|----|----|----|----|----------------|
| X  | X  | X  | 0  | NONE           |
| 0  | 0  | 0  | 1  | 1              |
| 0  | 0  | 1  | 1  | 2              |
| 0  | 1  | 0  | 1  | 3              |
| 0  | 1  | 1  | 1  | 4              |
| 1  | 0  | 0  | 1  | 5              |
| 1  | 0  | 1  | 1  | 6              |
| 1  | 1  | 0  | 1  | 7              |
| 1  | 1  | 1  | 1  | 8              |

X = Don't Care

# ADG506A/ADG507A

## ABSOLUTE MAXIMUM RATINGS<sup>1</sup>

(T<sub>A</sub> = 25°C unless otherwise noted)

|                                    |                                                                                 |
|------------------------------------|---------------------------------------------------------------------------------|
| V <sub>DD</sub> to V <sub>SS</sub> | 44 V                                                                            |
| V <sub>DD</sub> to GND             | 25 V                                                                            |
| V <sub>SS</sub> to GND             | -25 V                                                                           |
| Analog Inputs <sup>2</sup>         |                                                                                 |
| Voltage at S, D                    | V <sub>SS</sub> - 2 V to V <sub>DD</sub> + 2 V or 20 mA, Whichever Occurs First |
| Continuous Current, S or D         | 20 mA                                                                           |
| Pulsed Current S or D              | 1 ms Duration, 10% Duty Cycle 40 mA                                             |
| Digital Inputs <sup>2</sup>        |                                                                                 |
| Voltage at A, EN                   | V <sub>SS</sub> - 4 V to V <sub>DD</sub> + 4 V or 20 mA, Whichever Occurs First |

## CAUTION

ESD (electrostatic discharge) sensitive device. Electrostatic charges as high as 4000 V readily accumulate on the human body and test equipment and can discharge without detection. Although the ADG506A/ADG507A feature proprietary ESD protection circuitry, permanent damage may occur on devices subjected to high energy electrostatic discharges. Therefore, proper ESD precautions are recommended to avoid performance degradation or loss of functionality.

## Power Dissipation (Any Package)

|                        |         |
|------------------------|---------|
| Up to +75°C            | 470 mW  |
| Derates above +75°C by | 6 mW/°C |

## Operating Temperature

|                        |                 |
|------------------------|-----------------|
| Commercial (K Version) | -40°C to +85°C  |
| Industrial (B Version) | -40°C to +85°C  |
| Extended (T Version)   | -55°C to +125°C |

Storage Temperature Range -65°C to +150°C

Lead Temperature (Soldering, 10 secs) +300°C

## NOTES


<sup>1</sup>Stresses above those listed under Absolute Maximum Ratings may cause permanent damage to the device. This is a stress rating only; functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

<sup>2</sup>Overvoltage at A, EN, S or D will be clamped by diodes. Current should be limited to the Maximum Rating above.




## PIN CONFIGURATIONS


### DIP, SOIC

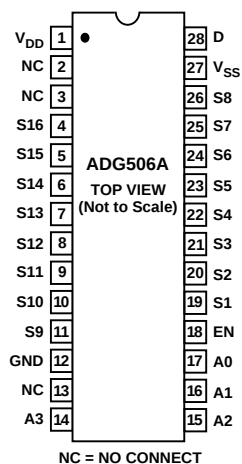


### LCCC

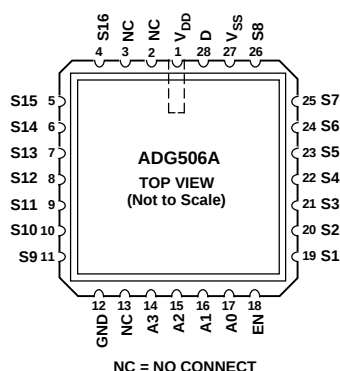


### PLCC

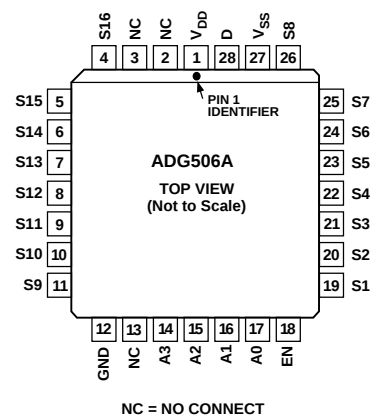


### DIP, SOIC, TSSOP

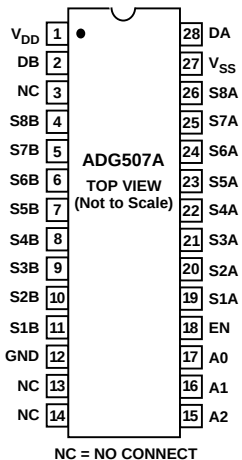

### LCCC

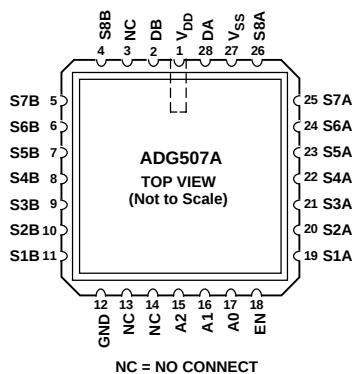

### PLCC

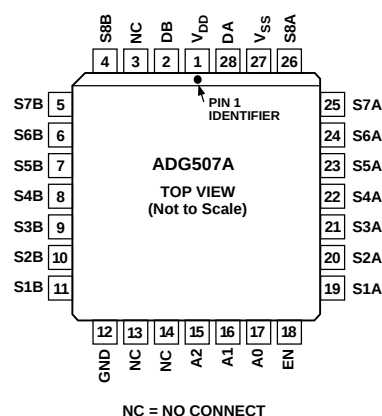

# Typical Performance Characteristics—ADG506A/ADG507A

The multiplexers are guaranteed functional with reduced single or dual supplies down to 4.5 V.

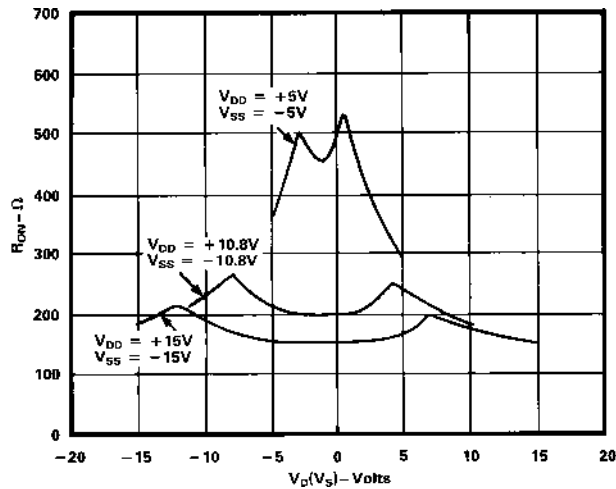


Figure 1.  $R_{ON}$  as a Function of  $V_D$  ( $V_S$ ): Dual Supply Voltage,  $T_A = +25^\circ\text{C}$

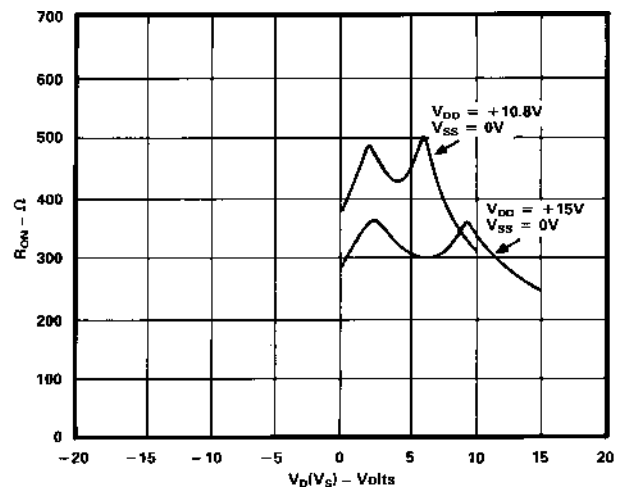


Figure 4.  $R_{ON}$  as a Function of  $V_D$  ( $V_S$ ) Single Supply Voltage,  $T_A = +25^\circ\text{C}$

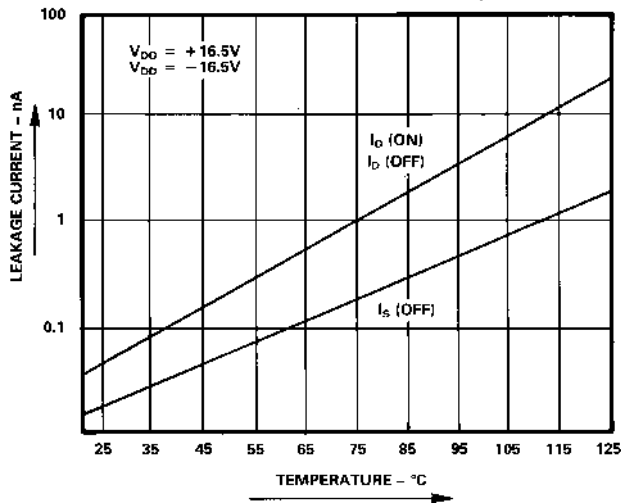


Figure 2. Leakage Current as a Function of Temperature (Note: Leakage Currents Reduce as the Supply Voltages Reduce)

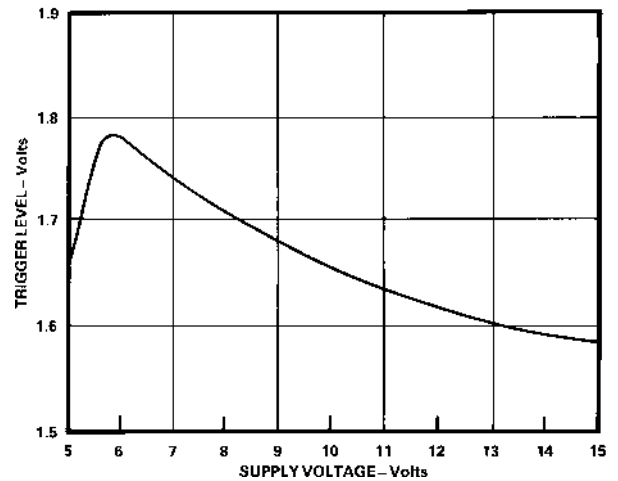


Figure 5. Trigger Levels vs. Power Supply Voltage, Dual or Single Supply,  $T_A = +25^\circ\text{C}$

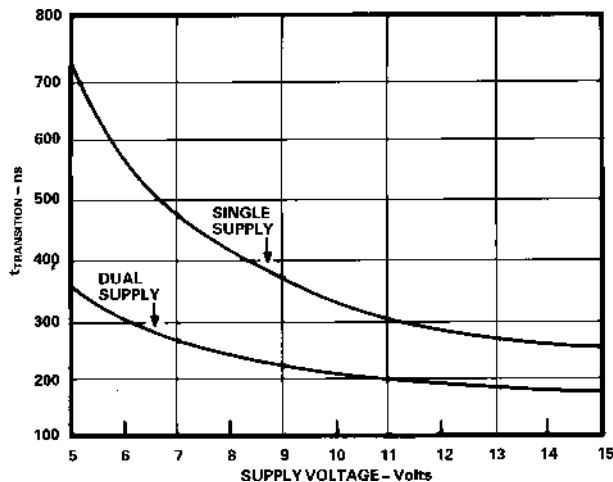


Figure 3.  $t_{TRANSITION}$  vs. Supply Voltage: Dual and Single Supplies,  $T_A = +25^\circ\text{C}$  (Note: For  $V_{DD}$  and  $|V_{SS}| < 10\text{ V}$ ;  $V1 = V_{DD}/V_{SS}$ ,  $V2 = V_{SS}/V_{DD}$ . See Test Circuit 6)


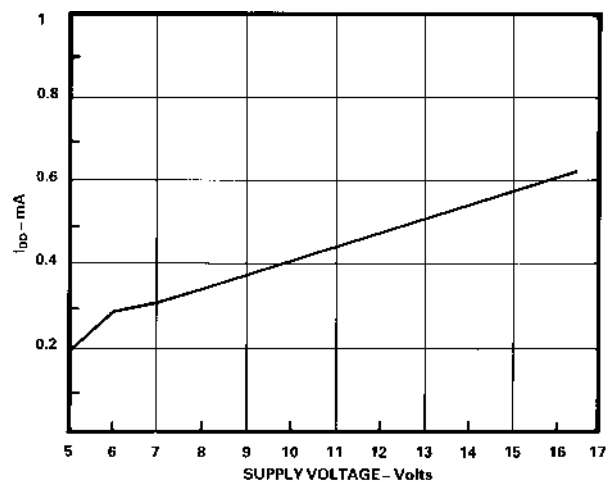



Figure 6.  $I_{DD}$  vs. Supply Voltage: Dual or Single Supply,  $T_A = +25^\circ\text{C}$

# ADG506A/ADG507A–Test Circuits


Note: All Digital Input Signal Rise and Fall Times Measured from 10% to 90% of 3 V.  $t_R = t_F = 20$  ns.

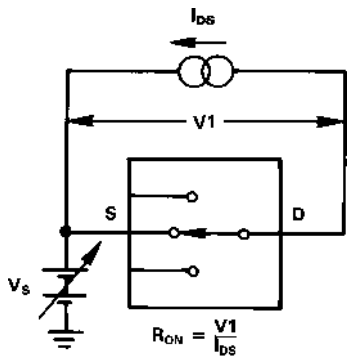


Test Circuit 1.  $R_{ON}$

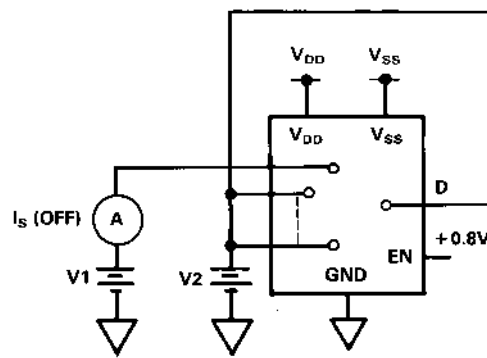


Test Circuit 2.  $I_S$  (OFF)

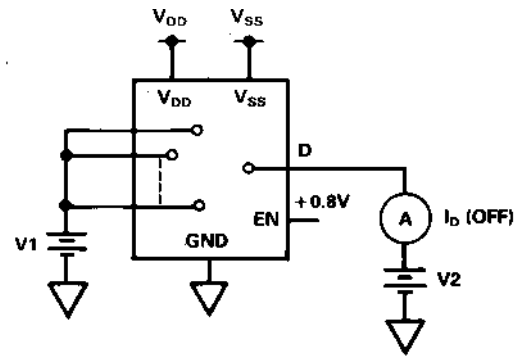


Test Circuit 3.  $I_D$  (OFF)

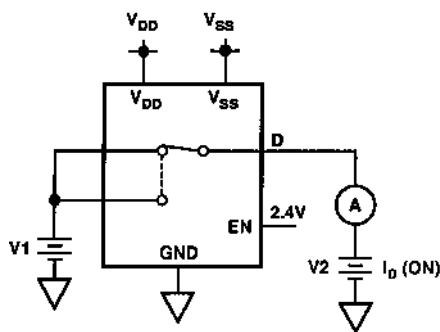

Test Circuit 4.  $I_D$  (ON)


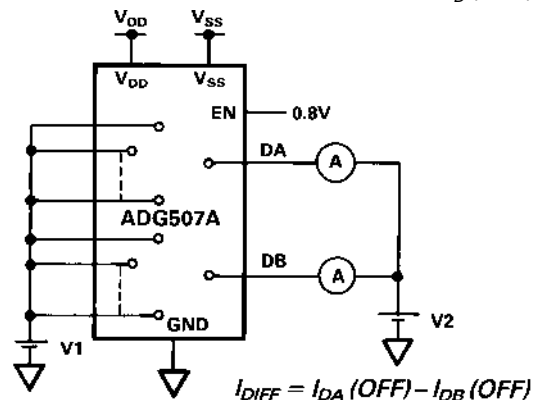


Test Circuit 5.  $I_{DIFF}$




\*SIMILAR CONNECTION FOR AD507A


Test Circuit 6. Switching Time of Multiplexer,  $t_{TRANSITION}$

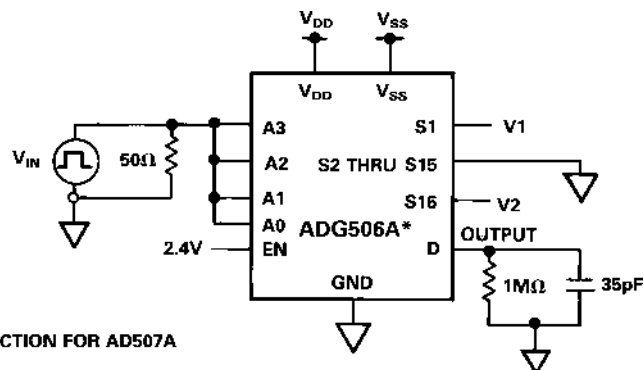

\*SIMILAR CONNECTION FOR AD507A


Test Circuit 7. Break-Before-Make Delay,  $t_{OPEN}$

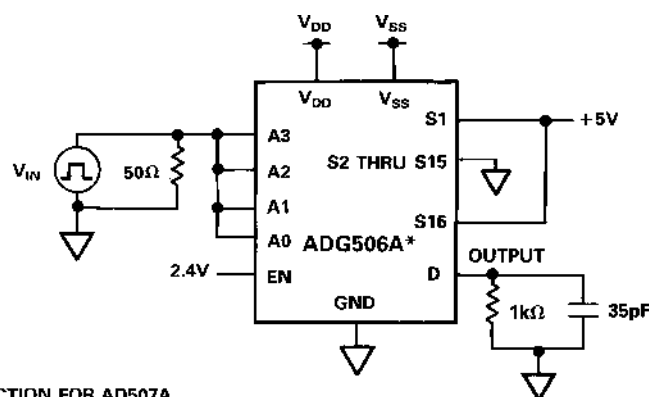

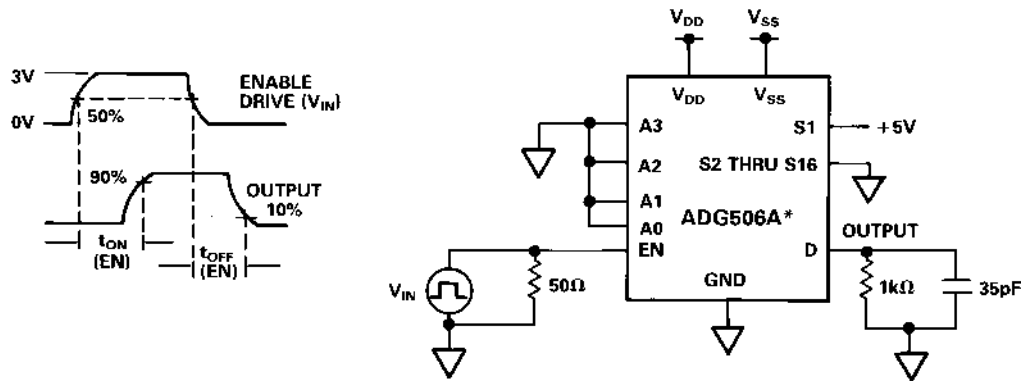

\*SIMILAR CONNECTION FOR AD507A

Test Circuit 8. Enable Delay,  $t_{ON}(EN)$ ,  $t_{OFF}(EN)$

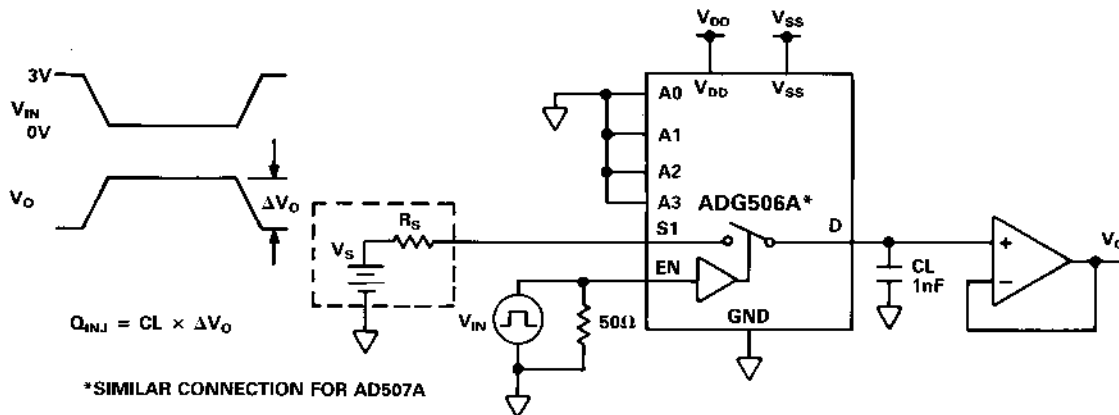

\*SIMILAR CONNECTION FOR AD507A

Test Circuit 9. Charge Injection

## SINGLE SUPPLY AUTOMOTIVE APPLICATION

The excellent performance of the multiplexers under single supply conditions makes the ADG506A/ADG507A suitable in applications such as automotive and disc drives where only positive power supply voltages are normally available. The following application circuit shows the ADG507A connected as an 8-channel differential multiplexer in an automotive, data acquisition application circuit.

The AD7580 is a 10-bit successive approximation ADC, which has an on-chip sample-and-hold amplifier and provides a conversion result in 20  $\mu$ s. The ADC has differential analog inputs and is configured in the application circuit for a span of 2.5 V over a common-mode range 0 V to +5 V. Wider common-mode ranges can be accommodated. See the AD7579/AD7580 data sheet for more details. The complete system operates from +12 V (+10%) and +5 V supplies. The analog input signals to the ADG507A contain information such as temperature, pressure, speed etc.

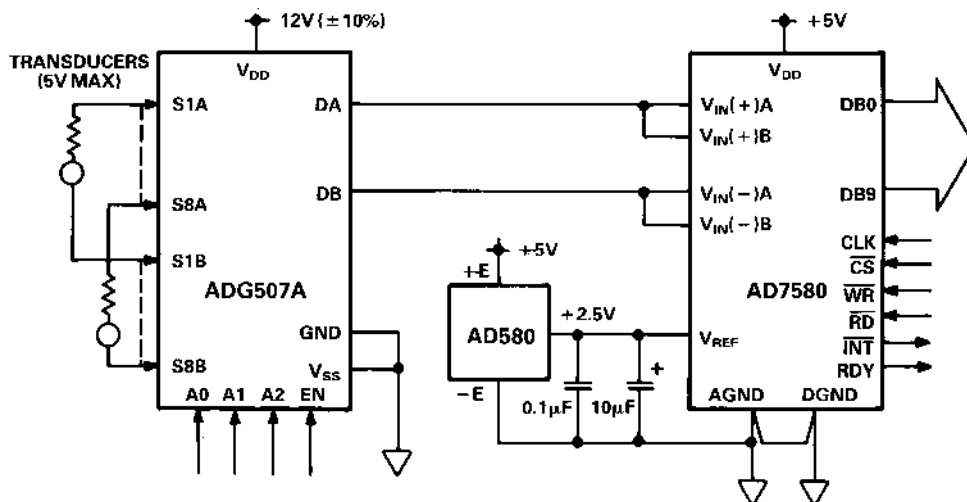


Figure 7. ADG507A in a Single Supply Automotive Data Acquisition Application

# ADG506A/ADG507A

## TERMINOLOGY


|                 |                                                                                          |
|-----------------|------------------------------------------------------------------------------------------|
| $R_{ON}$        | Ohmic resistance between terminals D and S                                               |
| $R_{ON}$ Match  | Difference between the $R_{ON}$ of any two channels                                      |
| $R_{ON}$ Drift  | Change in $R_{ON}$ versus temperature                                                    |
| $I_S$ (OFF)     | Source terminal leakage current when the switch is off                                   |
| $I_D$ (OFF)     | Drain terminal leakage current when the switch is off                                    |
| $I_D$ (ON)      | Leakage current that flows from the closed switch into the body                          |
| $V_S$ ( $V_D$ ) | Analog voltage on terminal S or D                                                        |
| $C_S$ (OFF)     | Channel input capacitance for "OFF" condition                                            |
| $C_D$ (OFF)     | Channel output capacitance for "OFF" condition                                           |
| $C_{IN}$        | Digital input capacitance                                                                |
| $t_{ON}$ (EN)   | Delay time between the 50% and 90% points of the digital input and switch "ON" condition |

|                         |                                                                                                                                            |
|-------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|
| $t_{OFF}$ (EN)          | Delay time between the 50% and 10% points of the digital input and switch "OFF" condition                                                  |
| $t_{TRANSITION}$        | Delay time between the 50% and 90% points of the digital inputs and switch "ON" condition when switching from one address state to another |
| $t_{OPEN}$              | "OFF" time measured between 50% points of both switches when switching from one address state to another                                   |
| $V_{INL}$               | Maximum input voltage for Logic "0"                                                                                                        |
| $V_{INH}$               | Minimum input voltage for Logic "1"                                                                                                        |
| $I_{INL}$ ( $I_{INH}$ ) | Input current of the digital input                                                                                                         |
| $V_{DD}$                | Most positive voltage supply                                                                                                               |
| $V_{SS}$                | Most negative voltage supply                                                                                                               |
| $I_{DD}$                | Positive supply current                                                                                                                    |
| $I_{SS}$                | Negative supply current                                                                                                                    |


## OUTLINE DIMENSIONS

Dimensions shown in inches and (mm).


28-Lead Plastic DIP (Suffix N)

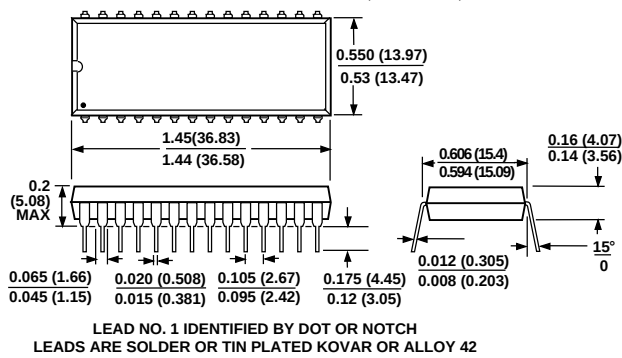


28-Lead Cerdip (Suffix Q)

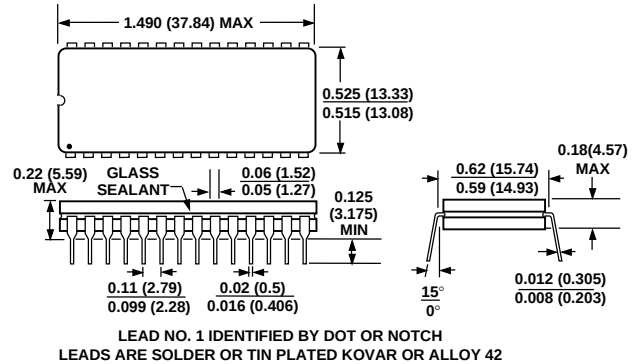


28-Lead SOIC (Suffix R)

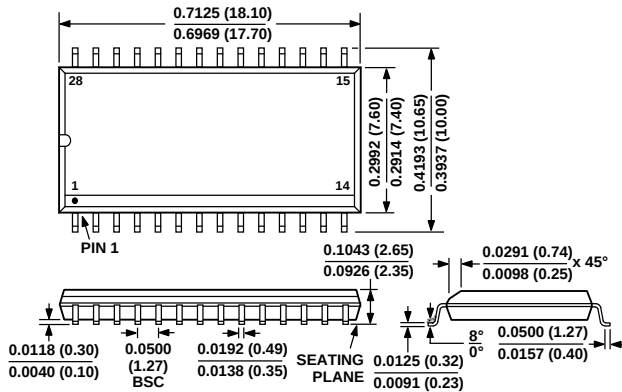


28-Lead TSSOP (Suffix RU)

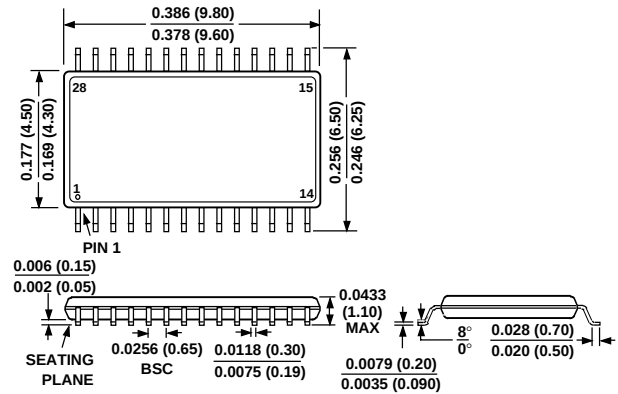

28-Terminal Plastic Leaded Chip Carrier (Suffix P)

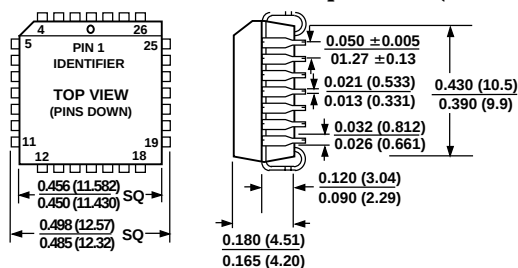

28-Terminal Leadless Ceramic Chip Carrier (Suffix E)

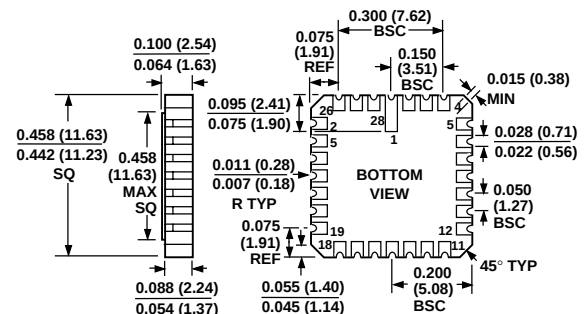

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)