

Data Sheet

LL01BR-TYRxxR34-M2-T



BRIDGELUX_ES_ARRAY



■ Features & Typical Applications

- High efficiency
- Available in 3 beam Patterns
- Optimized for uniform effects
- Lens without Housing
- Spot Lighting
- Architectural Lighting

■ Table of Contents


General Information & Product Nomenclature.....	P.2
Optical Specifications	P.3
Mechanical Specifications	P.4
Package Specifications	P.5

LL01BR-TYRxxR34-Mx-T

General Information

- Reflector Material Flammability Rating Aluminum
- Surface Coating Material Aluminum Mirror
- Operating Temperature range -40°C~+110°C(upper limit +120°C)
- Storage Temperature range -40°C~+110°C(upper limit +120°C)
- Usage and Maintenance:
 1. If necessary, clean reflectors with mild soap, water and soft cloth.
 2. Never use any commercial cleaning solvents on reflectors, like alcohol.
 3. Please handle or install reflectors with wearing gloves, skin oils may damage reflector or its optical characteristic.

Product Nomenclature

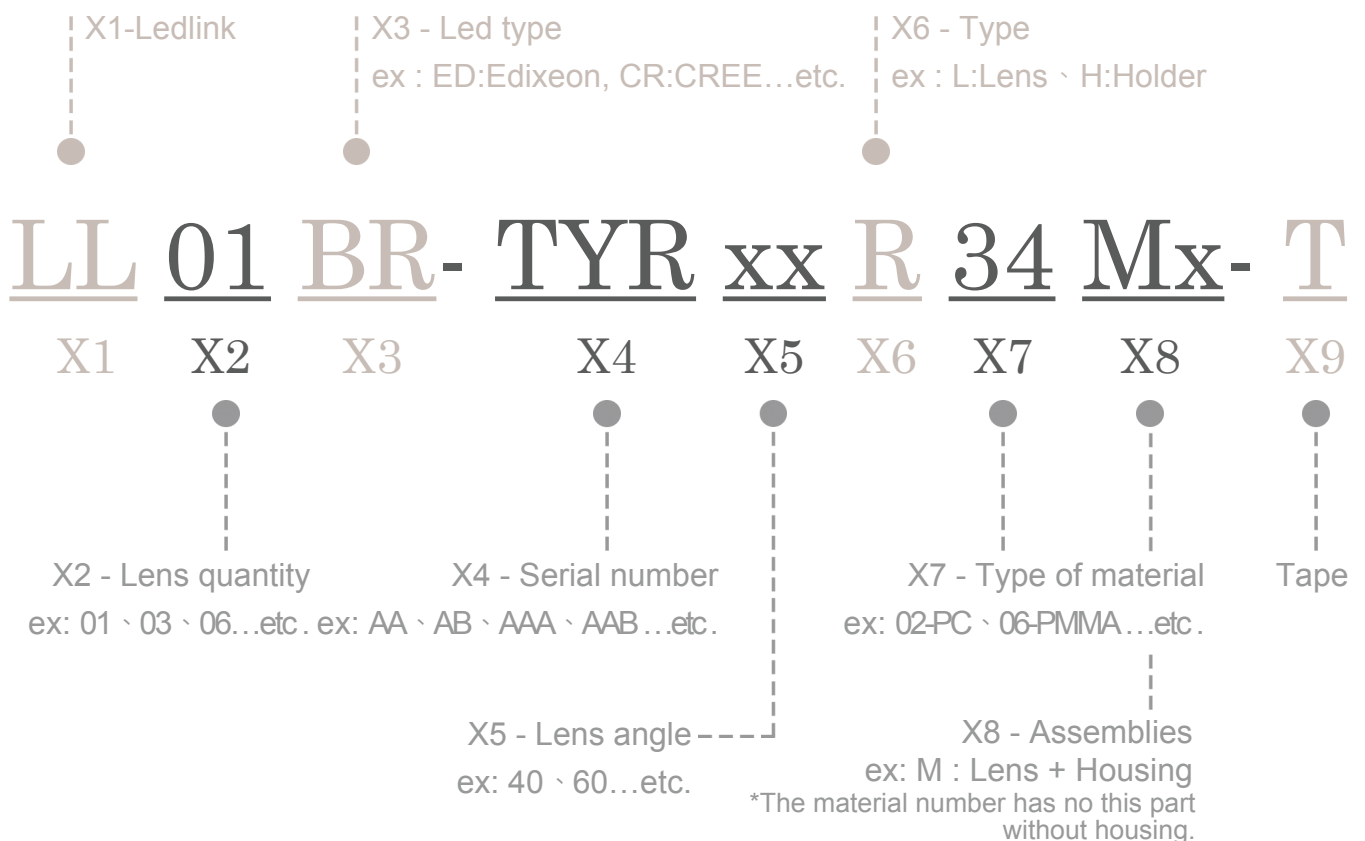









LL01BR-TYRxxR34-M2-T

Optical Specifications



BRIDGELUX_ES_ARRAY

Note: (1) All the results of analysis are based on 0 degrees of elevation.
 (2) Tolerance: $\pm 10\%$.
 (3) Led Luminous Flux(lm): 617.

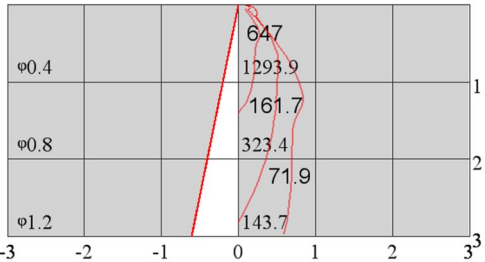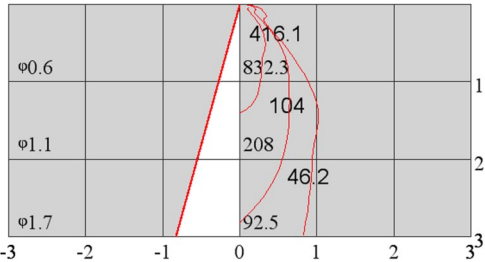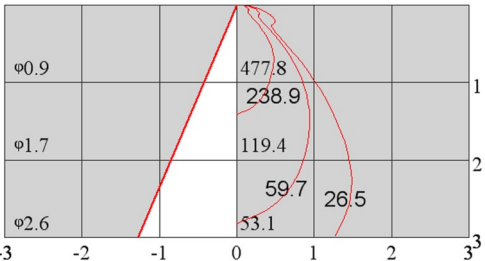Part Number	FWHM	Field Angle*	cd / lm	IES File
LL01BR-TYR24R34-M2-T	23°	76°	2.1	Download
				
Beam Pattern	Light Distribution Curve	Illuminance Distribution		
Part Number	FWHM	Field Angle*	cd / lm	IES File
LL01BR-TYR34R34-M2-T	33°	84°	1.3	Download
				
Beam Pattern	Light Distribution Curve	Illuminance Distribution		
Part Number	FWHM	Field Angle*	cd / lm	IES File
LL01BR-TYR50R34-M2-T	55°	92°	0.8	Download
				
Beam Pattern	Light Distribution Curve	Illuminance Distribution		

*The Field Angle is the angle between the two directions opposed to each other over the beam axis for which the luminous intensity is 10% that of the maximum luminous intensity.
 *This testing result is obtained through testing the popular rank LED samples which provided by the original manufacturer. Hence, the testing results would be varied as the users choose same LED model but different rank.

LL01BR-TYRxxR34-M2-T

Mechanical Specification

1. Fixing method

☐ Glue

☐ Screw


☒ Tape

☐ Fixing-ring


☒ Frame

Note: (1) All dimensions are in mm.
 (2) All measurements are ± 0.15 mm unless otherwise indicated.


2. Lens dimensions

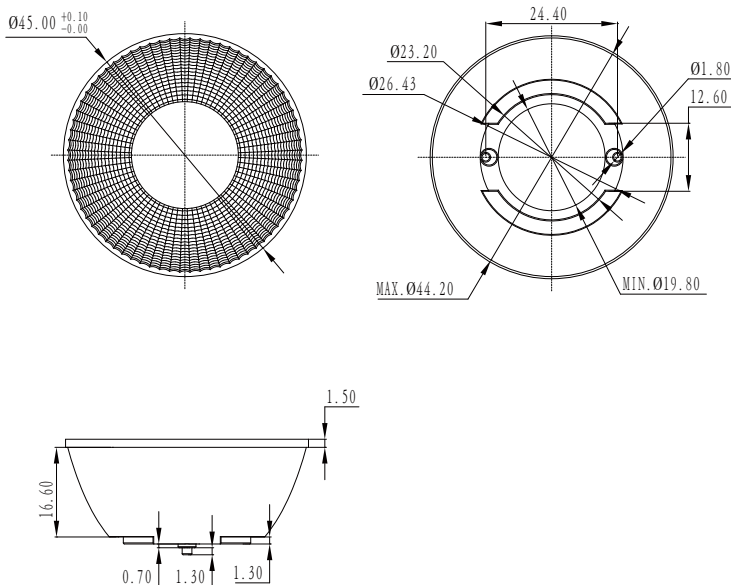


3. Lens + Leds + MCPCB assembly instruction

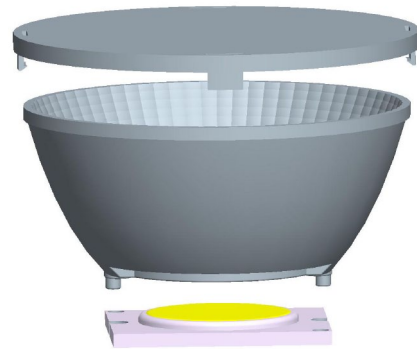

4. Lens assembly dimensions

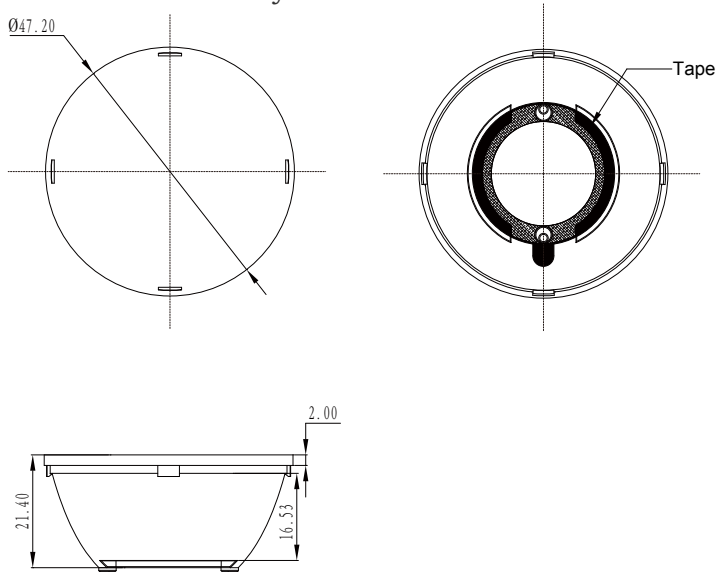


5. View assembly lens with MCPCB:

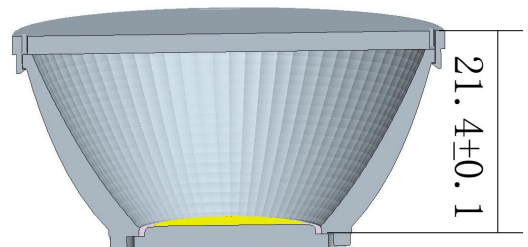



LL01BR-TYRxxR34-M2-T

Package Specifications

Item	Quantity	Total	Size(L*W*H)	G.W
Inner box		42 pcs	33*30*1.3 cm	4.5g
Outer box	630 pcs/Outer box	630 pcs	35*31*21 cm	
Outer box				

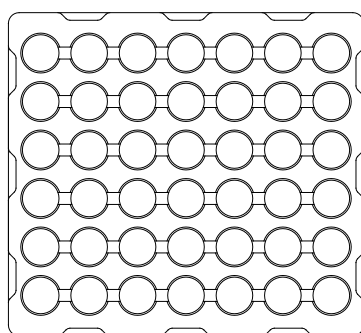

42 pcs/Inner box

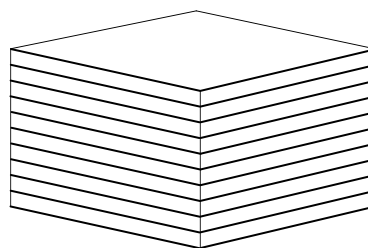

630 pcs/Outer box



Note:

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru