



TAOGLAS®



Datasheet

Barracuda

Part No:
OMB.433.B03F21

Description:

Barracuda - 433MHz 3dBi Omni Directional Outdoor Antenna with N Type Female Connector, U-Bolt, 523mm Length

Features:

- Omni-Directional Radiation Pattern
- Collinear
- 3dBi Peak gain, 433 MHz
- Fiberglass Housing
- Robust design for all weather operation
- IP65 Waterproof
- Length: 553mm, Weight: 350g
- N type Female connector
- Wall/Pole Mount bracket included
- RoHS & Reach Compliant

1. Introduction	3
2. Specifications	4
3. Antenna Characteristics	5
4. Radiation Patterns	7
5. Mechanical Drawing	11
6. Packaging	12
7. Antenna Installation Guide	13
Changelog	14

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein.

Reproduction, use or disclosure to third parties without express permission is strictly prohibited.



1. Introduction



The OMB.433.B03F21 is a fiberglass Omni-directional outdoor antenna, operating in the 433 MHz ISM band. The antenna is designed for applications such as metering, industrial / environmental monitoring, remote asset monitoring, and mesh network applications.

The OMB.433 operates at 433MHz, one of the most widely used license free ISM bands, with a 3dBi peak gain. The omni-directional antenna radiates uniformly in the azimuth. This collinear design characteristic provides the best performance, giving optimized coverage and therefore longer range in the horizontal plane over 360 degrees, thus minimizing the amount of nodes needed for a mesh network.

The UV resistant fiberglass housing enables the OMB antenna to be utilized in all kinds of harsh environments, making it more robust and safer than traditional whip antennas. It can be connected directly to the access point or telemetry unit, or can be mounted on wall or device surface via the N-type connector.

Another larger model, the OMB.433.B06F21 with 6dBi peak gain, also working in the 433MHz ISM band, is also available. Gain and connector customizable, subject to MOQ.


2. Specifications

Electrical	
Frequency (MHz)	433
Antenna Type	Collinear Dipole Array
Peak Gain	3 dB
Polarization	Vertical
Impedance	50 ohms
Max Input Power	100 watts
VSWR	1.5:1
Radiation	Omni-Directional
Vertical Beamwidth	60 Deg
Horizontal Beamwidth	360 Deg
Internal Material	Copper
Connector	N Type Female
Mechanical	
Length	553 mm (Max)
Radome Diameter	24mm
Bracket Dimension	70 x 53mm (Max)
Antenna Weight	350g
Mounting Accessories Weight	70g
Application	Indoor/Outdoor
Radome Material	White Fiberglass
Bracket Material	Aluminium
Mount Style	Pole Mount/Wall Mount
U Bolt	Stainless Steel
Wind Resistance	>150mph (>241km/h)
Waterproof	IP65
Environmental	
Storage Temperature	-40°C to +85°C
Operating Temperature	-40°C to +85°C
Operating Humidity	10%~90% non-condensing
Storage Humidity	5%~90% non-condensing


3. Antenna Characteristics

3.1 ISM 433


Return Loss

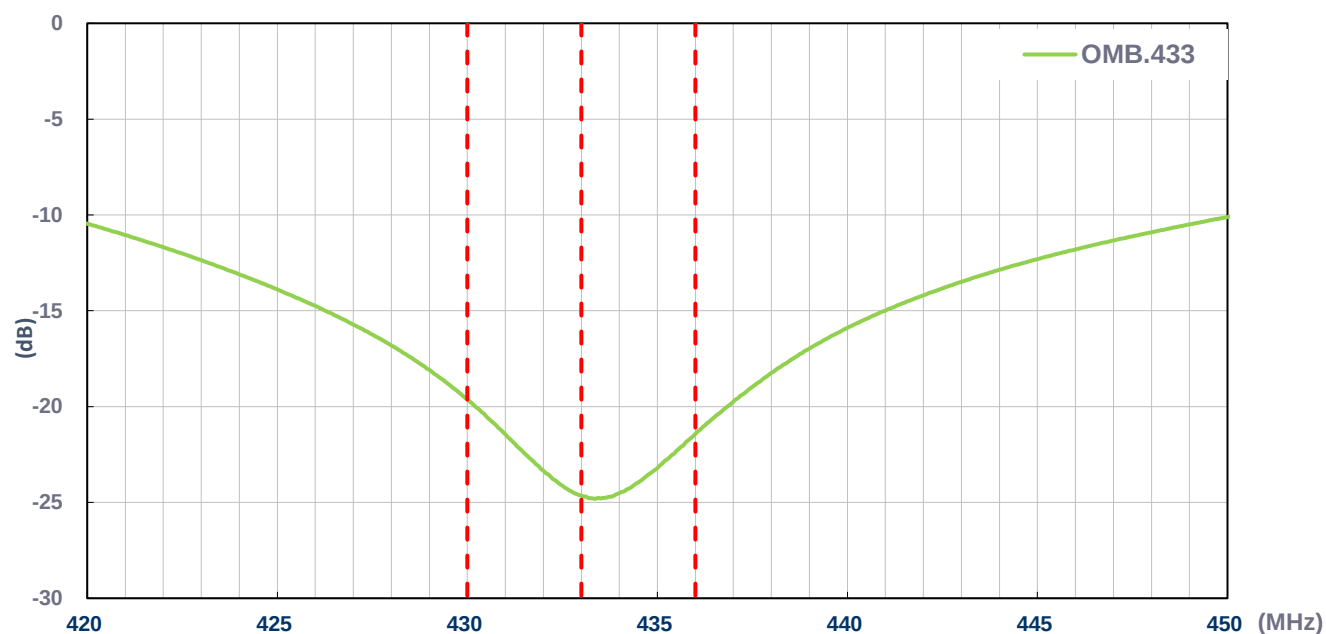


Efficiency

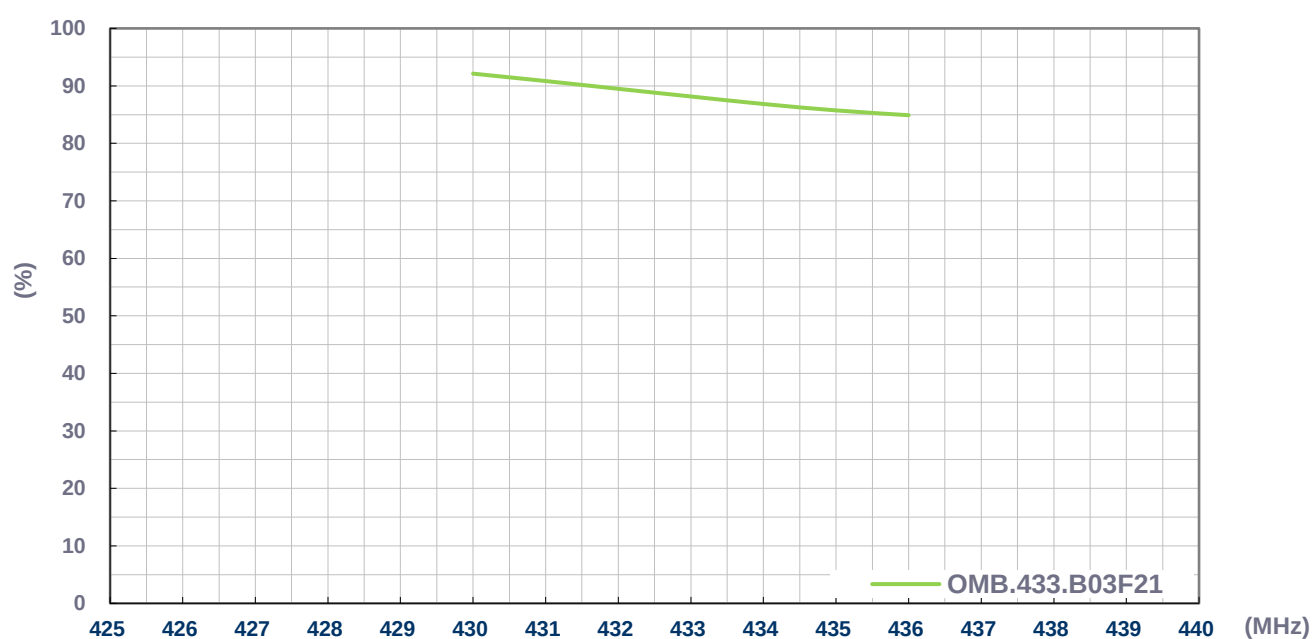

Average Gain

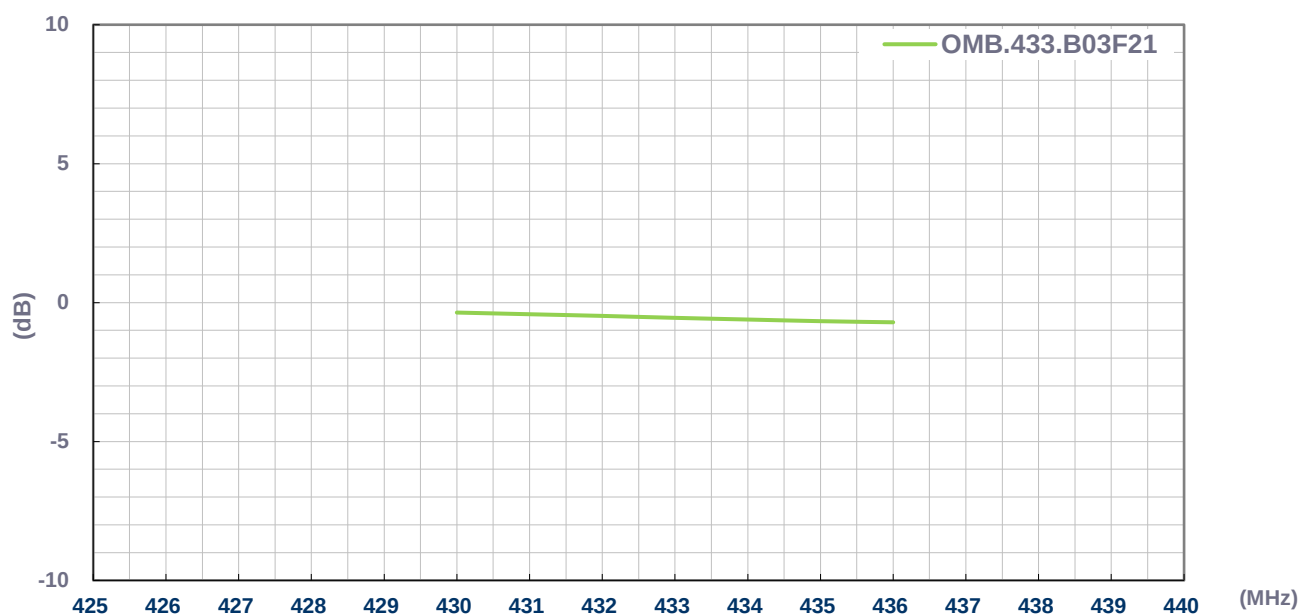


Peak Gain

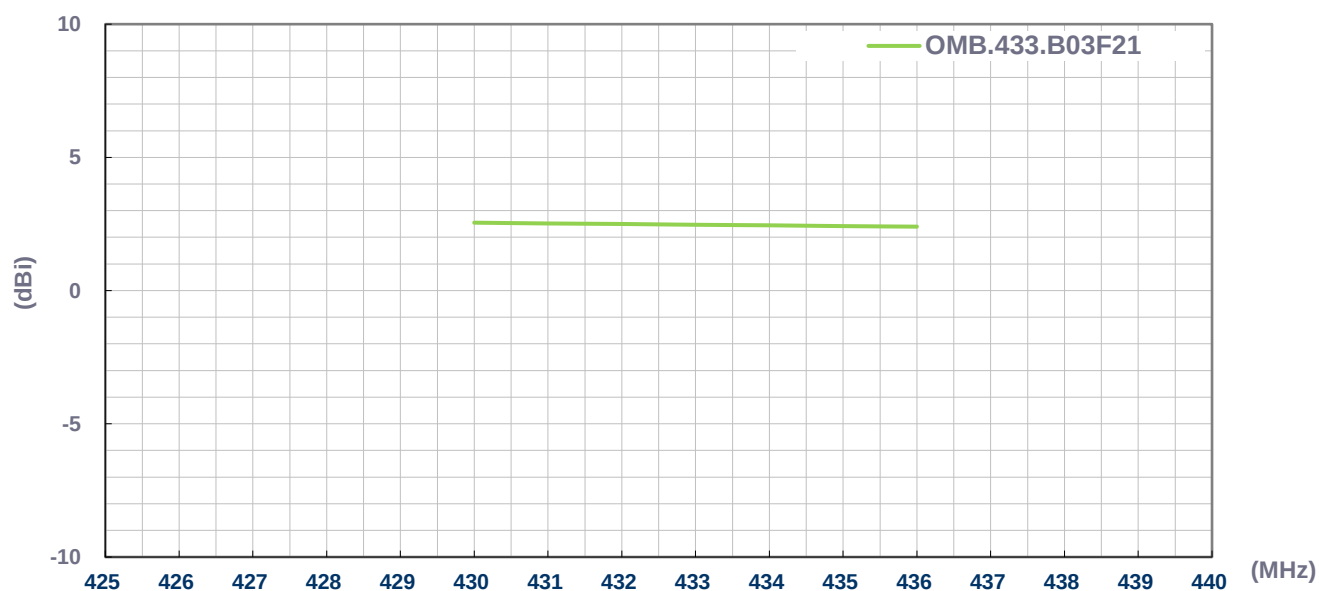


4. Radiation Patterns

4.1 Test Setup

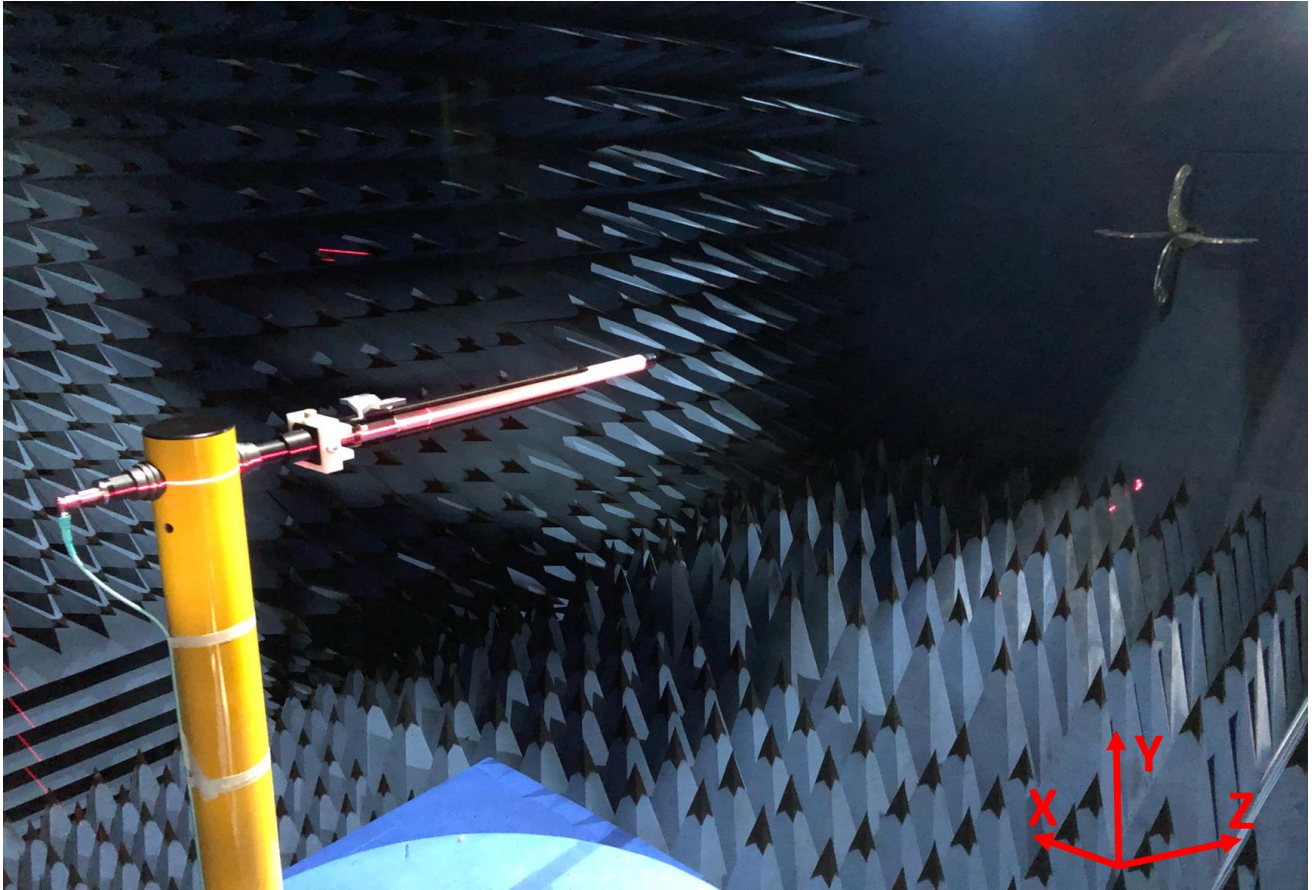




4.2 430MHz 3D and 2D Radiation Patterns

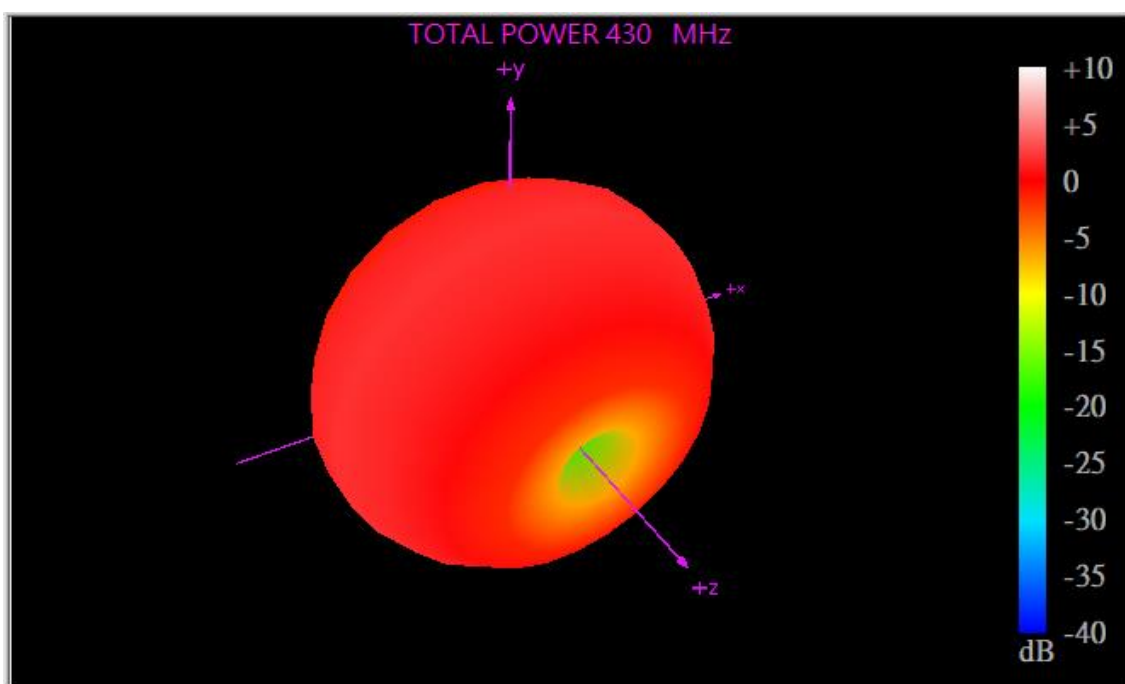


XZ Plane

YZ Plane

XY Plane

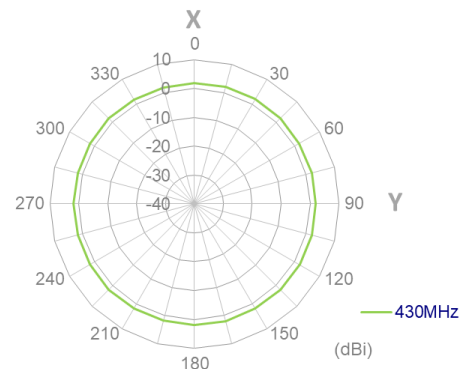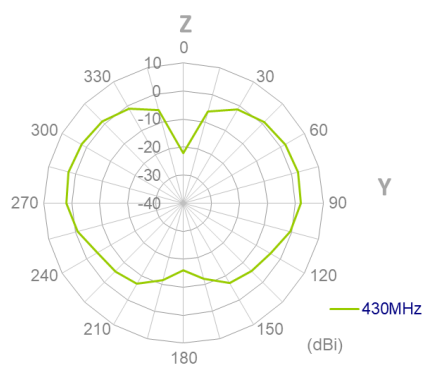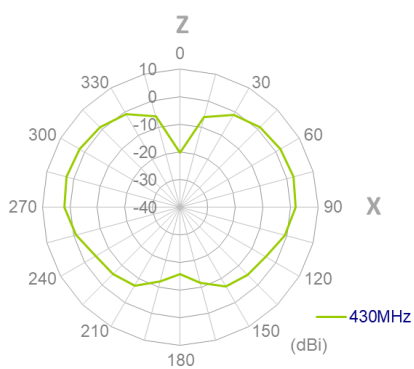




4.3 433 MHz 3D and 2D Radiation Patterns

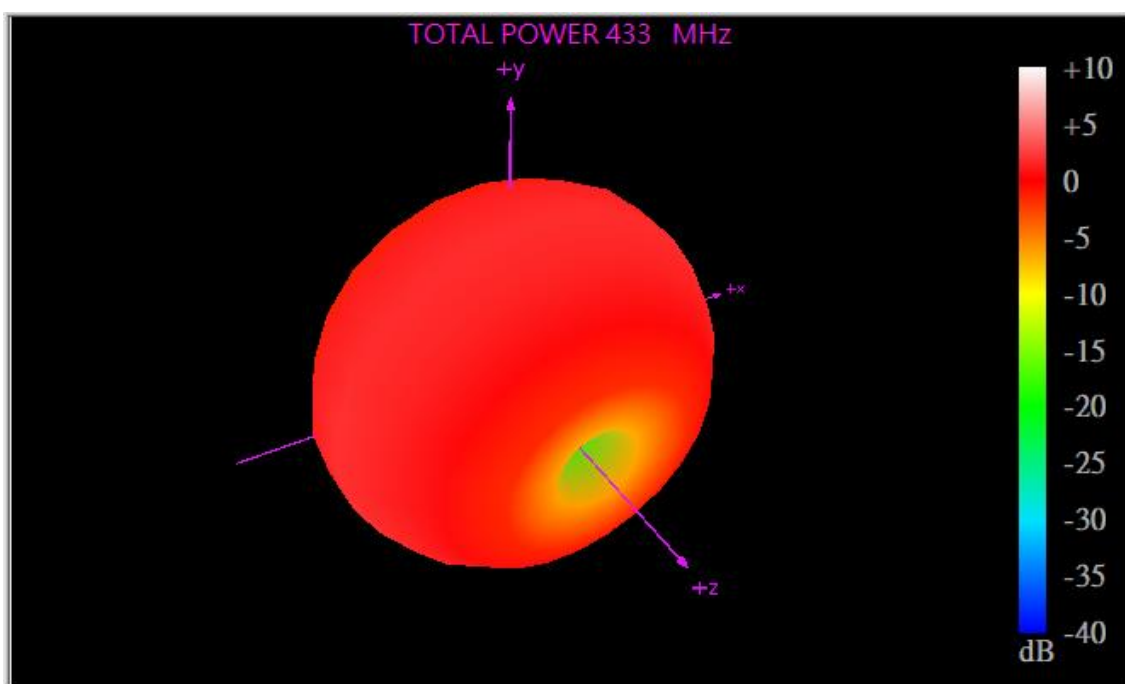


XZ Plane

YZ Plane

XY Plane

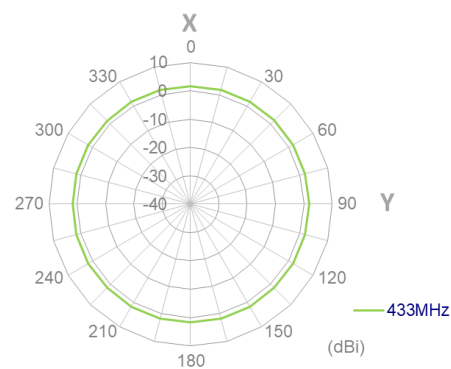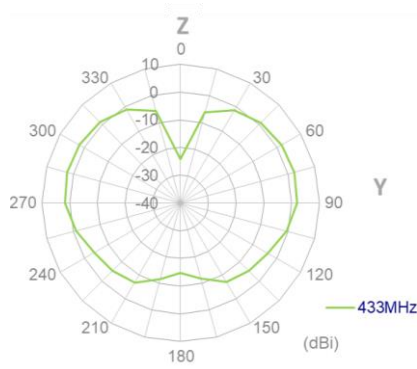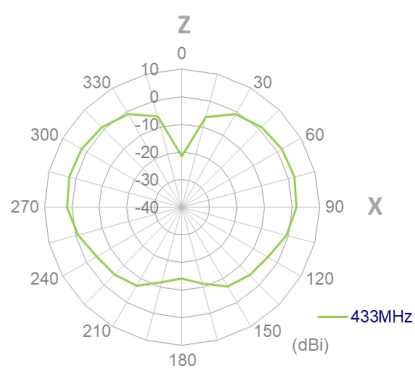




4.4 436 MHz 3D and 2D Radiation Patterns

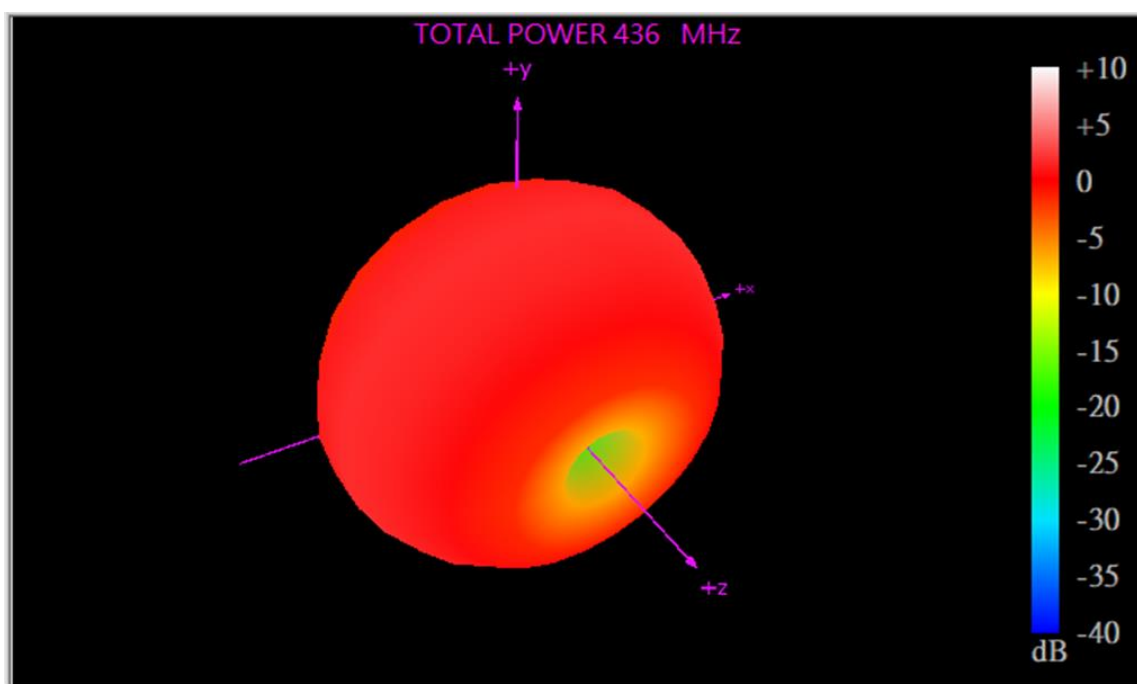


XZ Plane

YZ Plane

XY Plane

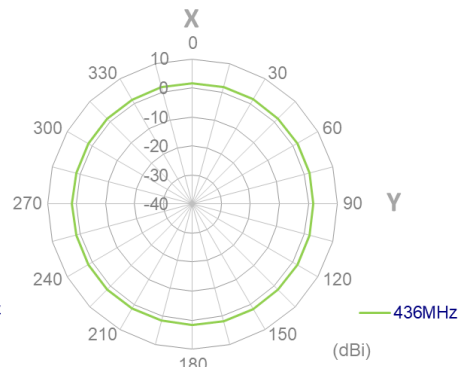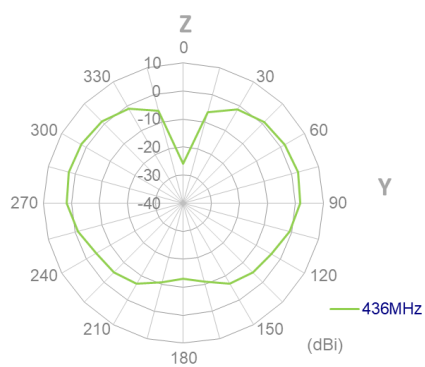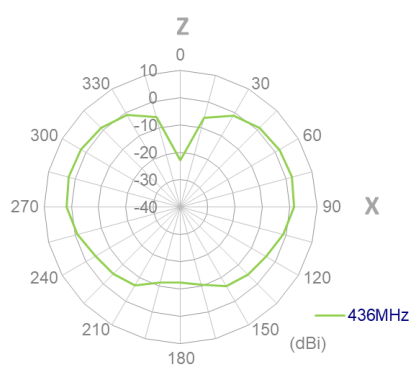

5. Mechanical Drawing (Units: mm)

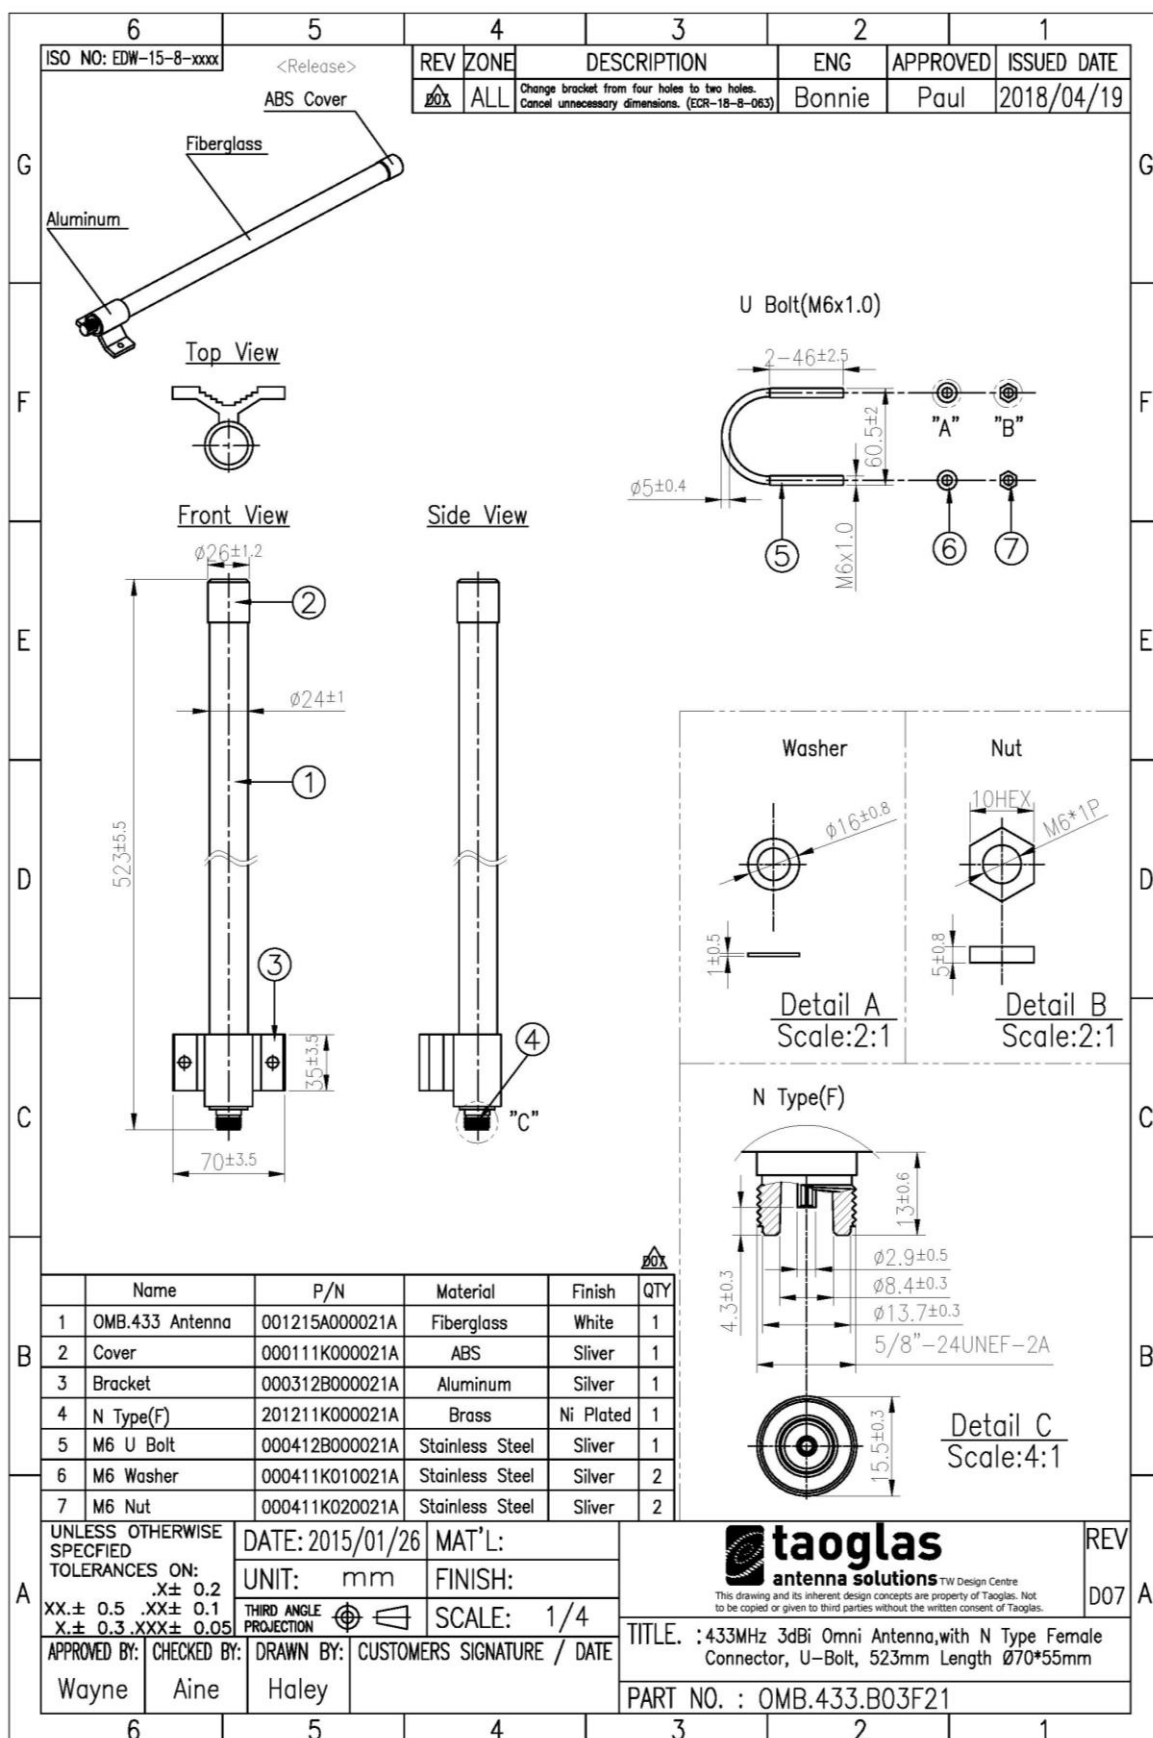


6. Packaging


OMB.433.B03F21

Packaging Specifications


1 OMB.433.B03F21 per PE Bag
 Bag Dimensions 130mm*650mm
 1 PE Bag per Tube
 Tube Dimensions - Ø80mm*Height 585mm
 Total Weight - 620g

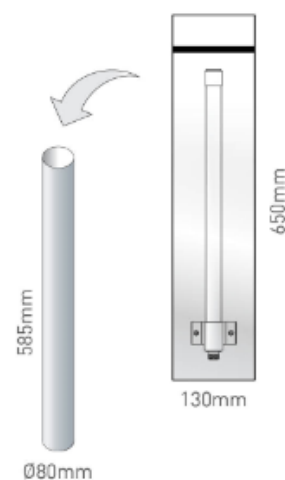


10 tubes per carton
 Carton Dimensions - 590*410*180mm
 Weight - 7.26Kg

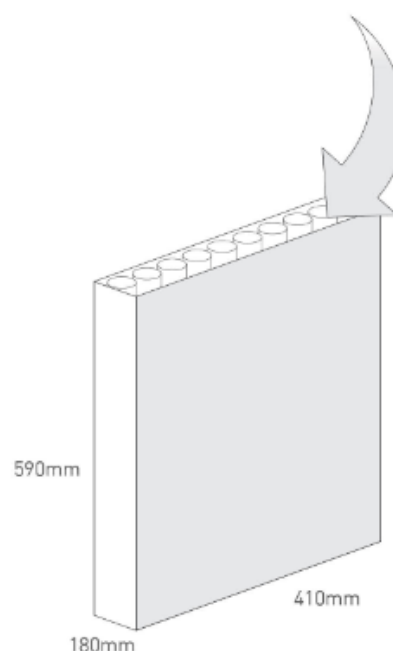

Pallet dimensions 1200*1000*1410mm
 28 Cartons per pallet

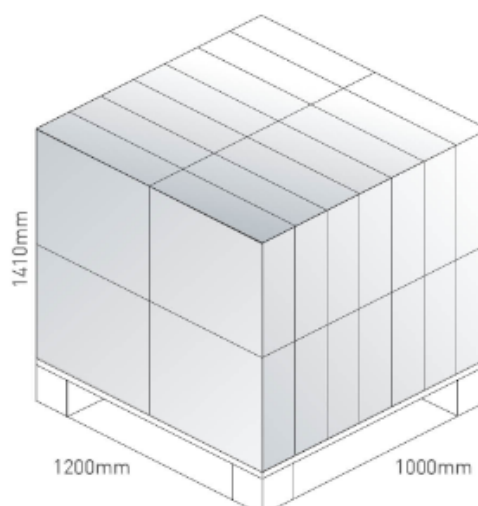

7. Antenna Installation Guide

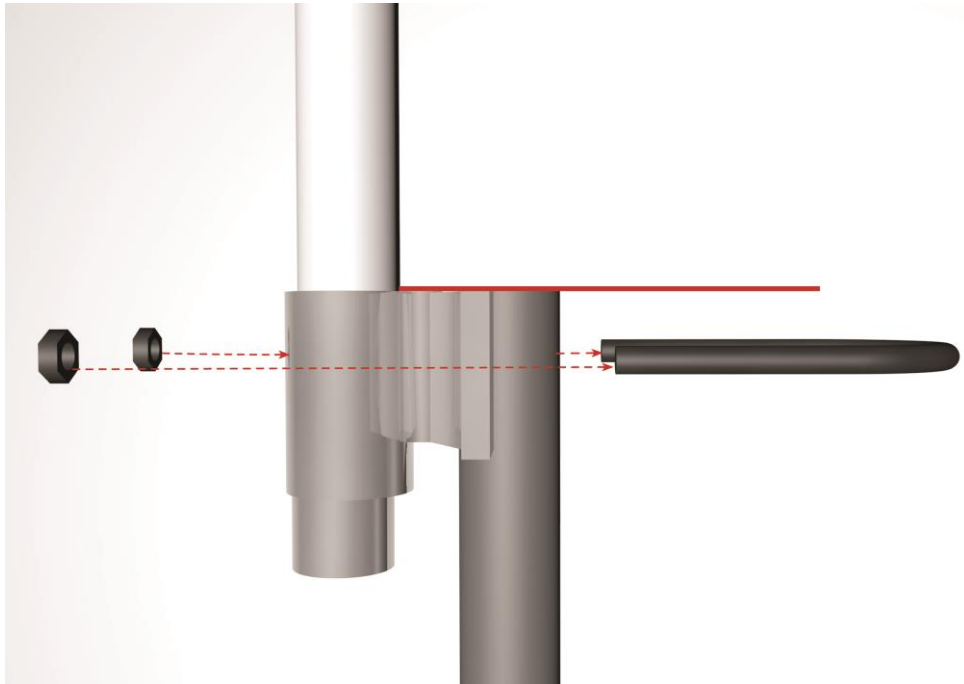

Changelog for the datasheet

SPE-16-8-019 – OMB.433.B03F21

Revision: F (Current Version)

Date:	2019-09-02
Notes:	Updated template, added Return Loss, Efficiency, Average Gain
Author:	Yu Kai Yeung

Previous Revisions



www.taoglas.com

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru