

Typical Applications

- **Appliances**



Materials

HOUSING: 6/6 nylon (UL94V-2), black.
TOP PLATE: 6/6 nylon (UL94V-2), black.

ACTUATOR: Glass filled polyester (UL94V-0), '01 and 02' styles, black (standard); '12, 13 and 14' styles, red (standard).

CONTACTS: Copper, silver plated.

TERMINALS: Copper, silver plated.


CONTACT SPRING: Music wire or stainless steel.

TERMINAL SEAL: Epoxy.

Slide

NOTE: Specifications and materials listed above are for switches with standard options. For information on specific and custom switches, consult Customer Service Center.

To order, simply select desired option from each category and place in the appropriate box. Available options are shown and described on pages I-34 through I-36. For additional options not shown in catalog, consult Customer Service Center.

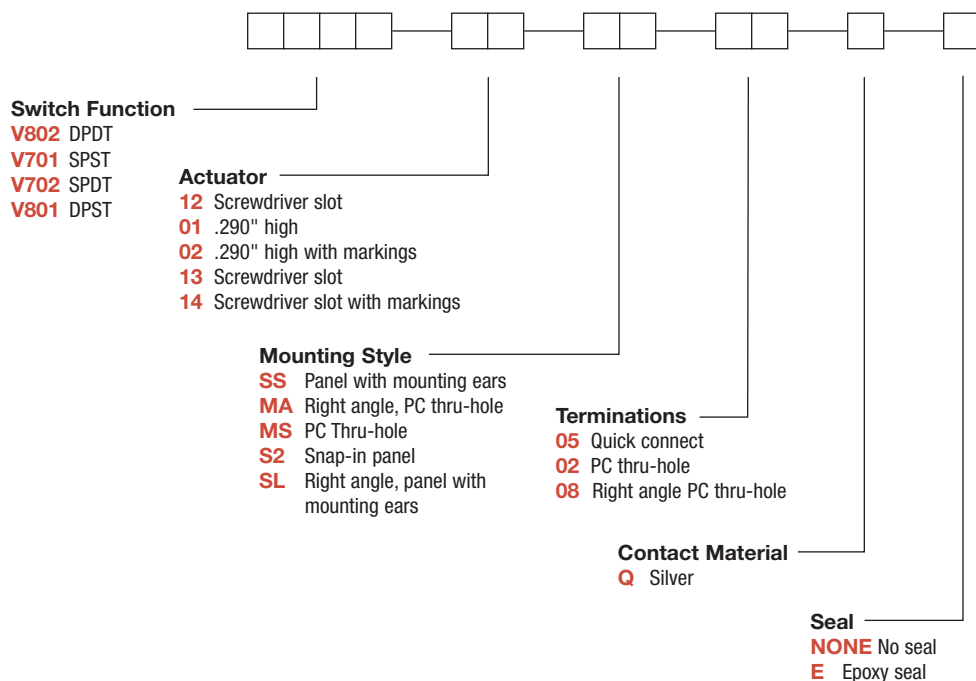

V Series
Power & Line Voltage Select Slide Switches

SWITCH FUNCTION


Table with 5 columns: NO. POLES, MODEL NO., SWITCH FUNCTION, SCHEMATIC, AVAILABLE MOUNTING STYLES. Rows include SP (V701 SPST, V702 SPDT) and DP (V801 DPST, V802 DPDT).

Table with 5 columns: NO. POLES, MODEL NO., SWITCH FUNCTION, SCHEMATIC, AVAILABLE MOUNTING STYLES. Rows include DP (V801 DPST, V802 DPDT).


All models with UL, CSA, and CE marks with all options. Contacts make on side actuator thrown.

ACTUATOR


- 12 SCREWDRIVER SLOT WITH MARKING
- 01 .290" HIGH
- 02 .290" HIGH WITH MARKINGS
- 13 SCREWDRIVER SLOT NO MARKING
- 14 SCREWDRIVER SLOT WITH MARKINGS




Actuator color is red with white 115V-230V markings (std.).




Actuator color is black.



markings are reversed on V702 and V802 models. Actuator color is black with white markings (std.).



Actuator color is red.




Markings are reversed on V702 and V802 models. Actuator color is red with white markings (std.). Note: Orientation of actuator markings and terminals.

MOUNTING STYLE


- SS PANEL WITH MOUNTING EARS



V80212SS05Q DPDT

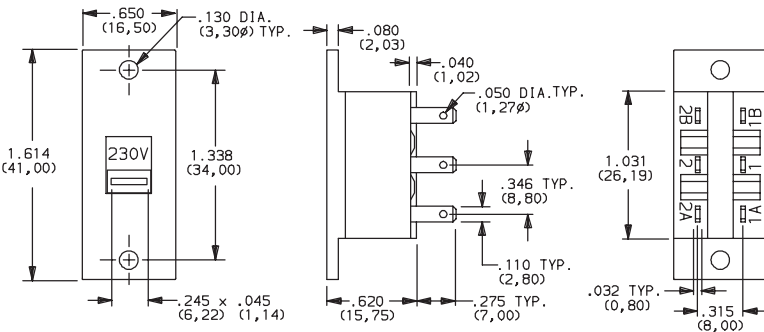

PANEL MOUNTING




AVAILABLE WITH: Models: All. Terminations: 02 and 05

- MA RIGHT ANGLE, PC THRU-HOLE



V80212MA08Q Horizontal Actuation DPDT

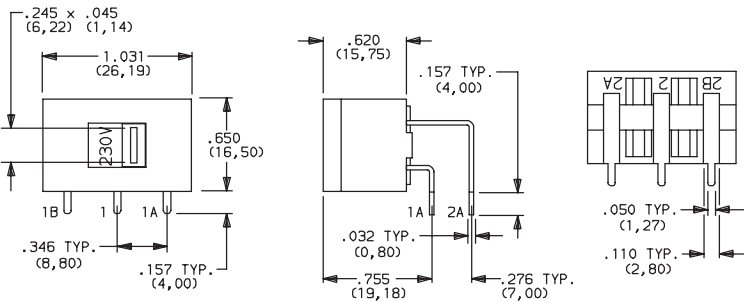

AVAILABLE WITH:

Models: All
Terminations: 08

PC MOUNTING

PC mount, side actuated. For mounting information, see TERMINATIONS section, page I-36.




Dimensions are shown: Inch (mm)
Specifications and dimensions subject to change



V Series Power & Line Voltage Select Slide Switches

MOUNTING STYLE

MS PC THRU-HOLE

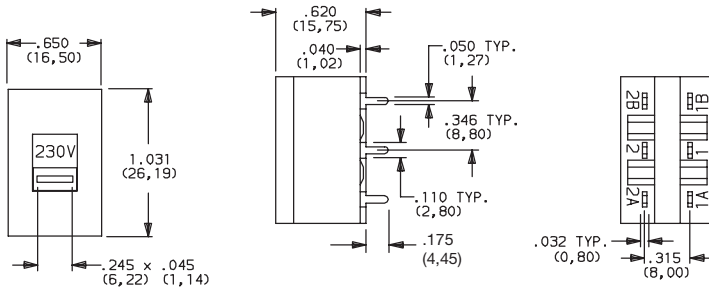

AVAILABLE WITH:

All models with 02 terminations

PC MOUNTING


PC mount, top actuated.
For mounting information,
see TERMINATIONS section, page I-36.



V80212MS02Q

DPDT

SL RIGHT ANGLE PANEL WITH MOUNTING EARS

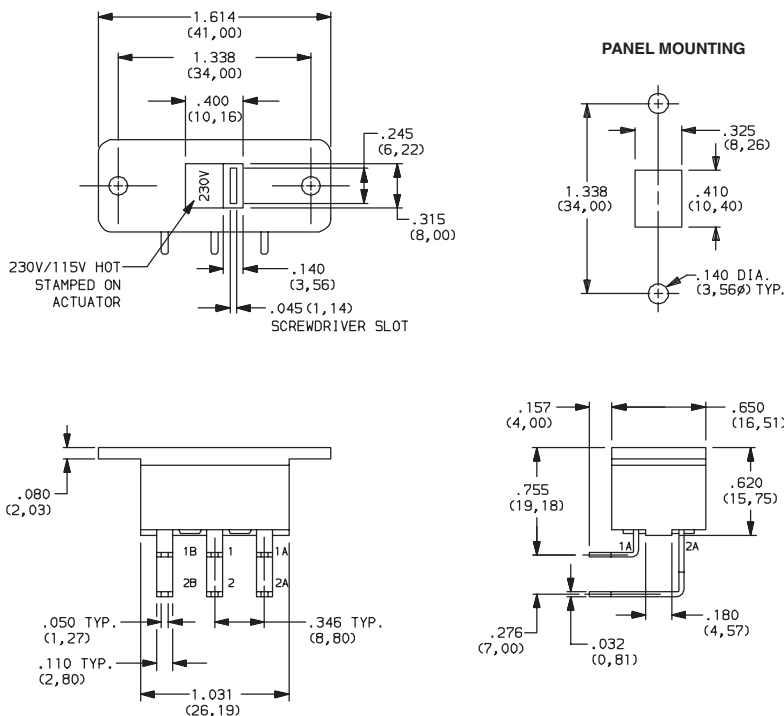

PANEL MOUNTING

AVAILABLE WITH:

All models with 08 terminations




V80213SL08Q


Horizontal Actuation

DPDT

S2 SNAP-IN PANEL MOUNT

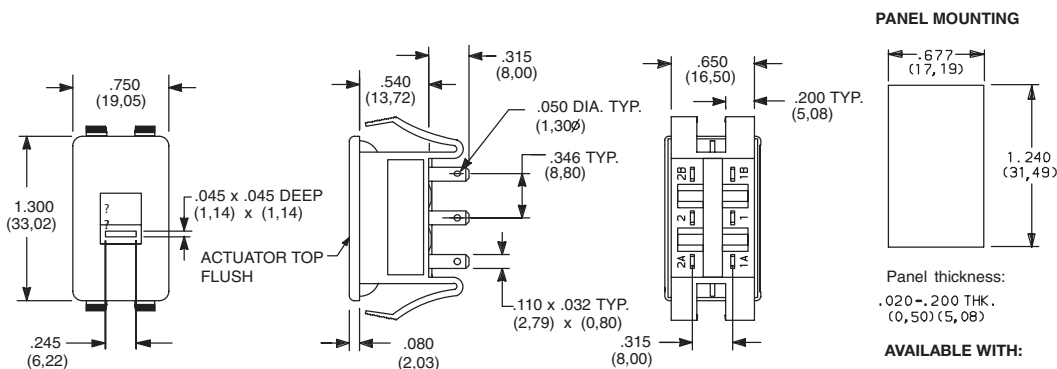

PANEL MOUNTING



Panel thickness:

.020-.200 THK.
(0,50) (5,08)

AVAILABLE WITH:

All models with 02 &
05 terminations



V80212S205Q

DPDT



Dimensions are shown: Inches (mm)

Specifications and dimensions subject to change




V Series


Power & Line Voltage Select Slide Switches

TERMINATIONS


05 QUICK CONNECT



02 PC THRU-HOLE




PC MOUNTING




MS, SS Mounting Styles.

08 PC THRU-HOLE

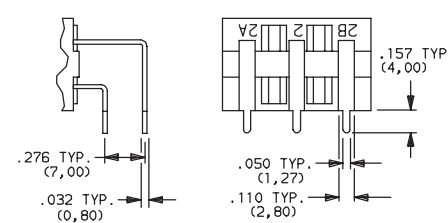

Not available with 'MS, SS or S2' mounting styles.

PC MOUNTING



MA, SL Mounting Styles.

CONTACT MATERIAL

OPTION CODE	CONTACT MATERIAL	RATINGS	
Q	SILVER ¹	POWER	10.1 AMPS @ 125 V AC; 4 AMPS @ 28 V DC; 5 AMPS @ 250 V AC (UL/CSA); 2.0 (0.5) AMPS @ 250 V AC, T85 (VDE).

* Note: See Technical Data section of this catalog for RoHS compliant and compatible definitions and specifications.

¹ CONTACTS & TERMINALS: Copper, silver plated (standard with all termination options).


All models with all options. V70X and V80X models .

NOTE: Any models supplied with Q contact material are RoHS compliant.

SEAL

NONE NO SEAL

E EPOXY SEAL



Dimensions are shown: Inch (mm)
Specifications and dimensions subject to change

www.ck-components.com

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru