

# Type RST

## Time Lag Radial Lead Micro Fuse Series

HF  RST Series

RoHS 2 Compliant

### Description

Sub-miniature, time lag type, 250V rated fuses designed, approved and complied with IEC 60127-3, standard sheet 4.



### Features

- Time lag (250V AC)
- Meet IEC standard 60127-3, sheet 4
- Wide operating temperature range
- Bulk and Tape & Reel packing available
- RoHS 2 compliant
- Halogen Free
- Lead Free

### Applications

Provide individual protection for components or internal circuits.

- Power supplies
- Battery chargers
- Consumer electronics
- Adapter
- Industrial controllers

LEAD FREE =   
HALOGEN FREE = 



### Physical Specifications

|           |   |
|-----------|---|
| Materials | Base and Cover : Black thermoplastic, UL 94-V0  |
|           | Pins : 100% Matte Tin Plated Copper   |
| Marking   | On Fuse :   |
|           | "bel", "T", "Current Rating", "250V" & "Appropriate Safety Logos"   |
|           | On Label :  |
|           | "bel", "RST", "Current Rating", "Voltage Rating", "Interrupting Rating", "Appropriate Safety Logos" and "  ", "  "(China RoHS compliant). |

### Electrical Characteristics (IEC-127-3 STANDARD SHEET 4)

| Rated Current          | 1.5In |      | 2.1In |     | 2.75In |     | 4In |     | 10In |     |
|------------------------|-------|------|-------|-----|--------|-----|-----|-----|------|-----|
|                        | Min   | Max  | Min   | Max | Min    | Max | Min | Max | Min  | Max |
| 80mA to 6.3A inclusive | 1     | 2    | 400   | 10  | 150    | 3   | 20  | 150 |      |     |
|                        | hour  | min. | ms    | sec | ms     | sec | ms  | ms  |      |     |

In clause 9.2, the test voltage for RST ratings from 80mA to 6.3A is 63VDC.

### Safety Agency Approvals






| Safety Agency   | Safety Agency Certificate | Voltage Rating (V)    | Ampere Range / Volt @ I.R. ability*                    |
|---|---------------------------|-----------------------|--|
|  | 1808557                   | 80mA-6.3A/<br>250V AC | 80mA-5A/250V AC @ 35A or 10 In whichever is greater.   |
|  | 40011144<br>40028321      |                       | 80mA-6.3A/250V AC @ 35A or 10 In whichever is greater. |
|  | E20624                    |                       | 80mA-6.3A/277V AC @ 100A                               |
|  | JET 1037-31007-1001       |                       | 1A-5A 250V AC @ 100A                                   |
|  | 2004010207111444          |                       | 80mA-5A/250V AC @ 35A or 10 In whichever is greater.   |

\*I.R.= Interrupting Rating = Short Circuit Rating(Amps)

## Environmental Specifications

|                           |  |
|---------------------------|--|
| Shock Resistance          | MIL-STD-202G, Method 213B, Test Condition 1 (100 G's peak for 6 milliseconds; Sawtooth waveform) |
| Vibration Resistance      | MIL-STD-202G, Method 201A (10-55 Hz X 3 axis / no load).   |
| Salt Spray Resistance     | MIL-STD-202G, Method 101E, Test Condition B (48 hrs.).   |
| Solderability             | MIL-STD-202G, Method 208H  |
| Resistance to solder Heat | MIL-STD-202G, Method 210F, Test Condition C. Top Side. (260°C,20 sec)                            |
| Moisture Resistance       | MIL-STD-202G, Method 202G, Method 106G   |
| Operating Temperature     | -55°C to +125°C  |

## Electrical Specifications

| Catalog Number | Ampere Rating | Typical Cold Resistance (ohms) | Volt-drop @100% In (Volt) max. | Voltage and Interrupting Ratings  | Melting I <sup>2</sup> T <10 mSec (A <sup>2</sup> Sec) | Melting I <sup>2</sup> T @10 In (A <sup>2</sup> Sec) | Maximum Power Dissipation (W) | Agency Approvals  |   |   |   |   |
|----------------|---------------|--------------------------------|--------------------------------|---|--|--|-------------------------------|---|---|---|---|---|
|                |               |                                |                                |   |  |  |                               |  |  |  |  |  |
| RST 80         | 80mA          | 3.5                            | 0.398                          | See Table of Safety Approvals on Page 1 for Voltage and associated Interrupting Ratings | 0.01   | 0.01   | 0.10                          | Y   | Y   | Y   |   | Y   |
| RST 100        | 100mA         | 2.3                            | 0.329                          |   | 0.02   | 0.02   | 0.11                          | Y   | Y   | Y   |   | Y   |
| RST 125        | 125mA         | 1.6                            | 0.295                          |   | 0.04   | 0.04   | 0.13                          | Y   | Y   | Y   |   | Y   |
| RST 160        | 160mA         | 1.1                            | 0.252                          |   | 0.07   | 0.06   | 0.15                          | Y   | Y   | Y   |   | Y   |
| RST 200        | 200mA         | 0.73                           | 0.200                          |   | 0.12   | 0.11   | 0.17                          | Y   | Y   | Y   |   | Y   |
| RST 250        | 250mA         | 0.55                           | 0.188                          |   | 0.38   | 0.41   | 0.19                          | Y   | Y   | Y   |   | Y   |
| RST 315        | 315mA         | 0.36                           | 0.152                          |   | 0.60   | 0.66   | 0.22                          | Y   | Y   | Y   |   | Y   |
| RST 400        | 400mA         | 0.25                           | 0.129                          |   | 0.9  | 1.0  | 0.25                          | Y   | Y   | Y   |   | Y   |
| RST 500        | 500mA         | 0.18                           | 0.114                          |   | 1.5  | 1.7  | 0.29                          | Y   | Y   | Y   |   | Y   |
| RST 630        | 630mA         | 0.13                           | 0.109                          |   | 2.4  | 2.6  | 0.33                          | Y   | Y   | Y   |   | Y   |
| RST 800        | 800mA         | 0.095                          | 0.103                          |   | 3.7  | 4.2  | 0.38                          | Y   | Y   | Y   |   | Y   |
| RST 1          | 1A            | 0.070                          | 0.090                          |   | 6  | 7  | 0.44                          | Y   | Y   | Y   | Y   | Y   |
| RST 1.25       | 1.25A         | 0.053                          | 0.087                          |   | 9  | 11   | 0.51                          | Y   | Y   | Y   | Y   | Y   |
| RST 1.6        | 1.6A          | 0.038                          | 0.085                          |   | 15   | 17   | 0.58                          | Y   | Y   | Y   | Y   | Y   |
| RST 2          | 2A            | 0.029                          | 0.084                          |   | 23   | 27   | 0.67                          | Y   | Y   | Y   | Y   | Y   |
| RST 2.5        | 2.5A          | 0.022                          | 0.084                          |   | 37   | 43   | 0.77                          | Y   | Y   | Y   | Y   | Y   |
| RST 3.15       | 3.15A         | 0.017                          | 0.074                          |   | 58   | 69   | 0.88                          | Y   | Y   | Y   | Y   | Y   |
| RST 4          | 4A            | 0.013                          | 0.073                          |   | 92   | 110  | 1.02                          | Y   | Y   | Y   | Y   | Y   |
| RST 5          | 5A            | 0.010                          | 0.073                          |   | 145  | 175  | 1.17                          | Y   | Y   | Y   | Y   | Y   |
| RST 6.3        | 6.3A          | 0.008                          | 0.072                          |   | 230  | 281  | 1.34                          | Y   |   | Y   |   |   |

Consult manufacturer for other ratings



Specifications subject to change without notice

Bel Fuse Inc.  
206 Van Vorst Street  
Jersey City, NJ 07302 USA

+1 201.432.0463  
Bel.US.CS@belf.com  
[belfuse.com/circuit-protection](http://belfuse.com/circuit-protection)

## Temperature Derating Curve



## Average Time Current Curve



## Soldering Parameters

| Lead-free Wave Soldering Profile                   |  |
|--|--|
| Wave Soldering Parameter                           |  |
| Average ramp-up rate                               | 200°C / second                               |
| Heating rate during preheat                        | typical 1 - 2°C / second<br>Max 4°C / second |
| Final preheat temperature                          | within 125°C of soldering temperature        |
| Peak temperature T <sub>p</sub>                    | 260°C  |
| Time within +0°C / -5°C of actual peak temperature | 10 seconds                                   |
| Ramp-down rate                                     | 5°C / second max.                            |



## Fuse FGNO Explanation


0697 - [XXXX] X XX

0697=RST; [XXXX]=Ampere Rating; XX=See Ordering Information as below


| Fraction | Decimal | Milliamps | Bel FGNO[XXXX] |
|----------|---------|-----------|----------------|
| 8/100    | 0.080   | 80        | 0080           |
| 1/10     | .100    | 100       | 0100           |
| 1/8      | .125    | 125       | 0125           |
|          | .160    | 160       | 0160           |
| 2/10     | .200    | 200       | 0200           |
| 1/4      | .250    | 250       | 0250           |
|          | .315    | 315       | 0315           |
| 4/10     | .400    | 400       | 0400           |
| 1/2      | .500    | 500       | 0500           |
|          | .630    | 630       | 0630           |
| 8/10     | .800    | 800       | 0800           |

| Fraction | Decimal | Amps | Bel FGNO[XXXX] |
|----------|---------|------|----------------|
|          | 1.0     | 1    | 1000           |
| 1-1/4    | 1.25    | 1.25 | 1250           |
|          | 1.60    | 1.6  | 1600           |
|          | 2.0     | 2    | 2000           |
| 2-1/2    | 2.5     | 2.5  | 2500           |
|          | 3.15    | 3.15 | 3150           |
|          | 4.0     | 4    | 4000           |
|          | 5.0     | 5    | 5000           |
|          | 6.3     | 6.3  | 6300           |
|          |         |      |                |

## Mechanical Dimensions

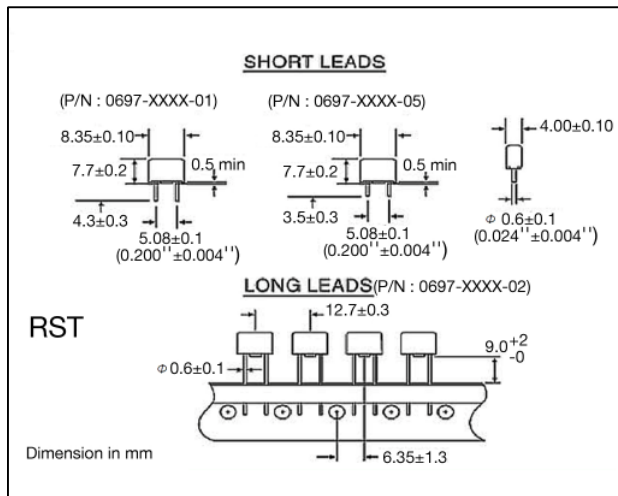

## Ordering Information

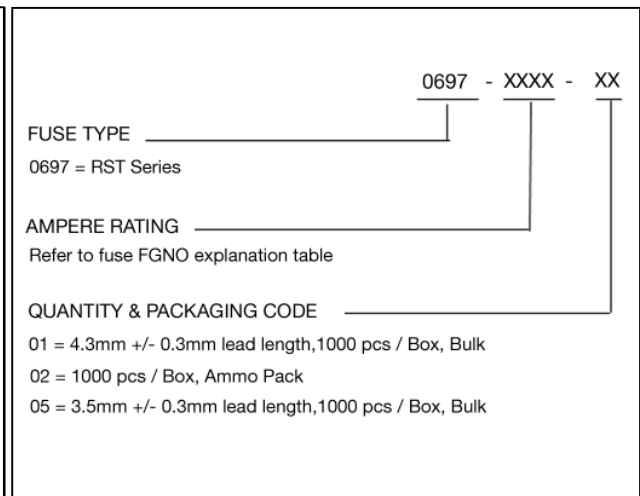

## Packaging

| Packaging Option             | Packaging Specification | Quantity | Packaging Code |
|------------------------------|-------------------------|----------|----------------|
| Bulk / bag, 1000 / box       | N/A                     | 1000     | 01 , 05        |
| 12.7 mm pitch, On Tape / box | IEC-286-2               | 1000     | 02             |



Specifications subject to change without notice

Bel Fuse Inc.  
206 Van Vorst Street  
Jersey City, NJ 07302 USA

+1 201.432.0463  
Bel.US.CS@belf.com  
[belfuse.com/circuit-protection](http://belfuse.com/circuit-protection)

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)