

## 74F32

### Quad 2-Input OR Gate

#### General Description


This device contains four independent gates, each of which performs the logic OR function.

#### Ordering Code:


| Order Number | Package Number | Package Description                                                         |
|--------------|----------------|-----------------------------------------------------------------------------|
| 74F32SC      | M14A           | 14-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-120, 0.150 Narrow |
| 74F32SJ      | M14D           | 14-Lead Small Outline Package (SOP), EIAJ TYPE II, 5.3mm Wide               |
| 74F32MTC     | MTC14          | 14-Lead Thin Shrink Small Outline Package (TSSOP), JEDEC MO-153, 4.4mm Wide |
| 74F32PC      | N14A           | 14-Lead Plastic Dual-In-Line Package (PDIP), JEDEC MS-001, 0.300 Wide       |

Devices also available in Tape and Reel. Specify by appending the suffix letter "X" to the ordering code.

#### Logic Symbol



#### Connection Diagram



#### Unit Loading/Fan Out

| Pin Names  | Description | U.L.<br>HIGH/LOW | Input $I_{IH}/I_{IL}$<br>Output $I_{OH}/I_{OL}$ |
|------------|-------------|------------------|-------------------------------------------------|
| $A_n, B_n$ | Inputs      | 1.0/1.0          | 20 $\mu$ A/-0.6 mA                              |
| $O_n$      | Outputs     | 50/33.3          | -1 mA/20 mA                                     |

**Absolute Maximum Ratings**(Note 1)

|                                                                        |                                      |
|------------------------------------------------------------------------|--------------------------------------|
| Storage Temperature                                                    | −65°C to +150°C                      |
| Ambient Temperature under Bias                                         | −55°C to +125°C                      |
| Junction Temperature under Bias                                        | −55°C to +150°C                      |
| V <sub>CC</sub> Pin Potential to Ground Pin                            | −0.5V to +7.0V                       |
| Input Voltage (Note 2)                                                 | −0.5V to +7.0V                       |
| Input Current (Note 2)                                                 | −30 mA to +5.0 mA                    |
| Voltage Applied to Output<br>in HIGH State (with V <sub>CC</sub> = 0V) |                                      |
| Standard Output                                                        | −0.5V to V <sub>CC</sub>             |
| 3-STATE Output                                                         | −0.5V to +5.5V                       |
| Current Applied to Output<br>in LOW State (Max)                        | twice the rated I <sub>OL</sub> (mA) |
| ESD Last Passing Voltage (Min)                                         | 4000V                                |

**Recommended Operating Conditions**

|                              |                |
|------------------------------|----------------|
| Free Air Ambient Temperature | 0°C to +70°C   |
| Supply Voltage               | +4.5V to +5.5V |

**Note 1:** Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

**Note 2:** Either voltage limit or current limit is sufficient to protect inputs.

**DC Electrical Characteristics**

| Symbol           | Parameter                         | Min                                       | Typ        | Max  | Units | V <sub>CC</sub> | Conditions                                           |
|------------------|-----------------------------------|-------------------------------------------|------------|------|-------|-----------------|------------------------------------------------------|
| V <sub>IH</sub>  | Input HIGH Voltage                | 2.0                                       |            |      | V     |                 | Recognized as a HIGH Signal                          |
| V <sub>IL</sub>  | Input LOW Voltage                 |                                           |            | 0.8  | V     |                 | Recognized as a LOW Signal                           |
| V <sub>CD</sub>  | Input Clamp Diode Voltage         |                                           |            | −1.2 | V     | Min             | I <sub>IN</sub> = −18 mA                             |
| V <sub>OH</sub>  | Output HIGH Voltage               | 10% V <sub>CC</sub><br>5% V <sub>CC</sub> | 2.5<br>2.7 |      | V     | Min             | I <sub>OH</sub> = −1 mA<br>I <sub>OH</sub> = −1 mA   |
| V <sub>OL</sub>  | Output LOW Voltage                | 10% V <sub>CC</sub>                       |            | 0.5  | V     | Min             | I <sub>OL</sub> = 20 mA                              |
| I <sub>IH</sub>  | Input HIGH Current                |                                           |            | 5.0  | μA    | Max             | V <sub>IN</sub> = 2.7V                               |
| I <sub>BVI</sub> | Input HIGH Current Breakdown Test |                                           |            | 7.0  | μA    | Max             | V <sub>IN</sub> = 7.0V                               |
| I <sub>CEX</sub> | Output HIGH Leakage Current       |                                           |            | 50   | μA    | Max             | V <sub>OUT</sub> = V <sub>CC</sub>                   |
| V <sub>ID</sub>  | Input Leakage Test                | 4.75                                      |            |      | V     | 0.0             | I <sub>ID</sub> = 1.9 μA<br>All Other Pins Grounded  |
| I <sub>OD</sub>  | Output Leakage Circuit Current    |                                           |            | 3.75 | μA    | 0.0             | V <sub>IOD</sub> = 150 mV<br>All Other Pins Grounded |
| I <sub>IL</sub>  | Input LOW Current                 |                                           |            | −0.6 | mA    | Max             | V <sub>IN</sub> = 0.5V                               |
| I <sub>OS</sub>  | Output Short-Circuit Current      | −60                                       |            | −150 | mA    | Max             | V <sub>OUT</sub> = 0V                                |
| I <sub>CCH</sub> | Power Supply Current              |                                           | 6.1        | 9.2  | mA    | Max             | V <sub>O</sub> = HIGH                                |
| I <sub>CCL</sub> | Power Supply Current              |                                           | 10.3       | 15.5 | mA    | Max             | V <sub>O</sub> = LOW                                 |

**AC Electrical Characteristics**

| Symbol           | Parameter                                         | T <sub>A</sub> = +25°C<br>V <sub>CC</sub> = +5.0V<br>C <sub>L</sub> = 50 pF |     |     | T <sub>A</sub> = −55°C to +125°C<br>V <sub>CC</sub> = +5.0V<br>C <sub>L</sub> = 50 pF |     | T <sub>A</sub> = 0°C to +70°C<br>V <sub>CC</sub> = +5.0V<br>C <sub>L</sub> = 50 pF |     | Units |
|------------------|---------------------------------------------------|-----------------------------------------------------------------------------|-----|-----|---------------------------------------------------------------------------------------|-----|------------------------------------------------------------------------------------|-----|-------|
|                  |                                                   | Min                                                                         | Typ | Max | Min                                                                                   | Max | Min                                                                                | Max |       |
| t <sub>PLH</sub> | Propagation Delay                                 | 3.0                                                                         | 4.2 | 5.6 | 3.0                                                                                   | 7.5 | 3.0                                                                                | 6.6 | ns    |
| t <sub>PHL</sub> | A <sub>n</sub> , B <sub>n</sub> to O <sub>n</sub> | 3.0                                                                         | 4.0 | 5.3 | 2.5                                                                                   | 7.5 | 3.0                                                                                | 6.3 |       |

# Physical Dimensions inches (millimeters) unless otherwise noted




**14-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-120, 0.150 Narrow  
Package Number M14A**



### LAND PATTERN RECOMMENDATION



DIMENSIONS ARE IN MILLIMETERS

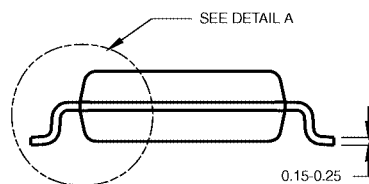

NOTES:

- A. CONFORMS TO EIAJ EDR-7320 REGISTRATION,  
ESTABLISHED IN DECEMBER, 1998.
- B. DIMENSIONS ARE IN MILLIMETERS.
- C. DIMENSIONS ARE EXCLUSIVE OF BURRS, MOLD  
FLASH, AND TIE BAR EXTRUSIONS.


M14DRevB1



DETAIL A

**14-Lead Small Outline Package (SOP), EIAJ TYPE II, 5.3mm Wide  
Package Number M14D**

# Physical Dimensions inches (millimeters) unless otherwise noted (Continued)

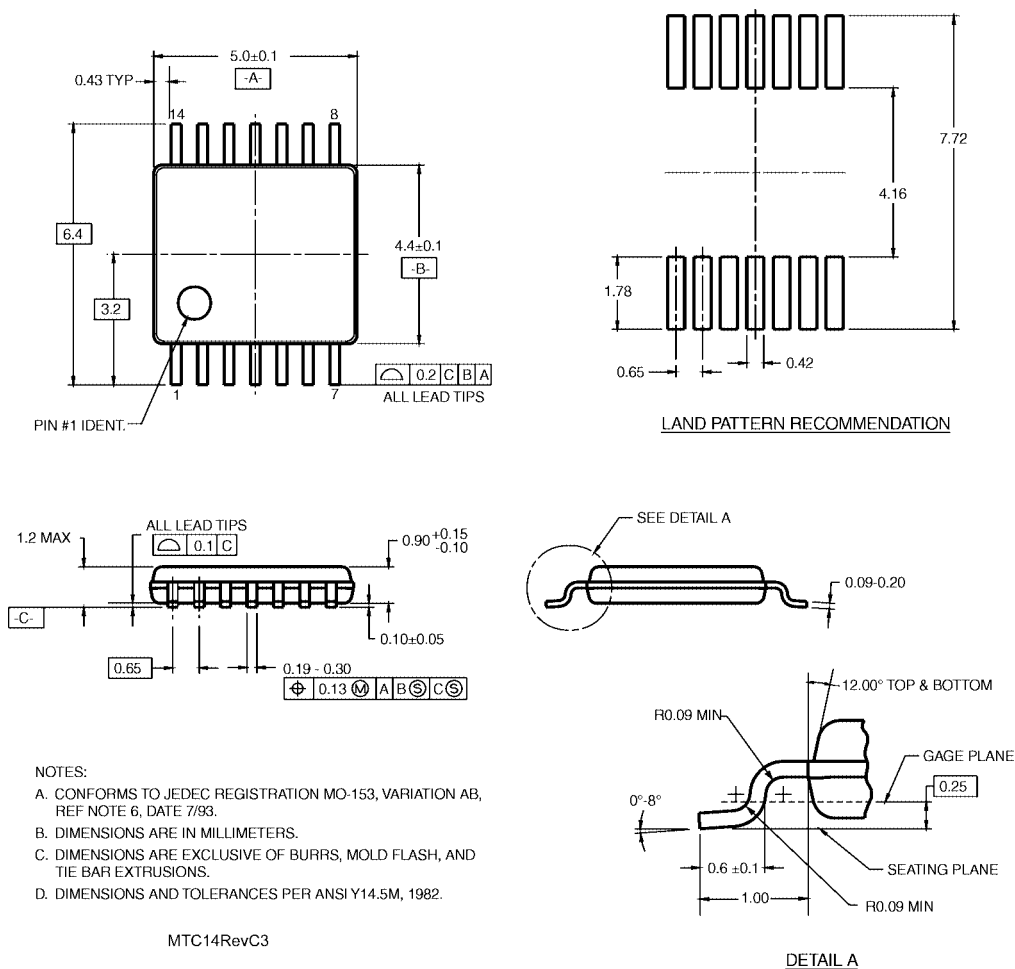

**14-Lead Thin Shrink Small Outline Package (TSSOP), JEDEC MO-153, 4.4mm Wide  
Package Number MTC14**

**Physical Dimensions** inches (millimeters) unless otherwise noted (Continued)

Fairchild does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and Fairchild reserves the right at any time without notice to change said circuitry and specifications.

**LIFE SUPPORT POLICY**

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

[www.fairchildsemi.com](http://www.fairchildsemi.com)

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)