


LEDiL[®]



RANGE & PRECISION – LEDiL[®]'s standard LED optics offer both

LEDiL is a Finnish manufacturer and supplier of top quality LED secondary optics. We are driven by an innovative 'can do, will do' attitude and willing to run that 'extra mile' to bring to our customers the finest solutions that add real value to their end products. Whether they need reflectors or lenses, asymmetric or symmetric. Our standard product range brings over 2.500 cost-effective optical solutions to our customers' needs.

Application support



Custom solutions



Symmetric



Asymmetric



Reflectors



Arrays



www.ledil.com

Autumn 2014

LEDiL

Global Supplier of LED Optics for Demanding Applications

Ledil, with design expertise in Finland and production facilities in Europe and China, is leading optics supplier to the world's premier lighting manufacturers. The innovative lenses and reflectors we produce provide optimal optic performance and durability. Relationships with top LED manufacturers allow Ledil to release products alongside newest LEDs; our customers enjoy rapid development and deployment of new fixtures with latest technology. We are THE optics partner to ensure that your LED lighting fixture is the most efficient and innovative on the market. Our engineers possess a "can do, will do" attitude based on quality, innovation and collaboration. Ledil has genuine desire to offer our clients competitive solutions and products and our staff consist of skillful and innovative experts that possess the latest knowledge of LED optics solutions.



Ledil Oy

Salorankatu 10, FI-24240 SALO, Finland
www.ledil.com

Local sales and technical support available in following countries

USA, China, Germany, UK, Benelux, Italy, Spain, Portugal
See www.ledil.com

Shipping locations

Salo, Finland
Hong Kong, China

Franchised Distribution Partners

See www.ledil.com

Dear Customer

Please note that you can find ordering codes for products together with the latest product information at our website:

www.ledil.com

FWHM, efficiency and other values in this catalogue are typical values and subject to chosen LED/optic - combination. Actual values can be found on our website.

We have included saved search paths for your convenience. URL to the saved search can be found under each product family name. This address will take you directly to the family listing.

Subscribe to our newsletter and get the latest product information at **www.ledil.com/subscribe**

LED compatibility:

Cree

CXA1310
CXA15
CXA1520
CXA1816
CXA1830
CXA2011
CXA25
CXA30
CXA35
MC-E
MC-E RGB
MK-R
MK-R2
ML-E
MP-L
MT-G
MT-G2
MX-3
MX-6
XB-D
XB-H
XH-B/G
XM-L
XM-L EZW
XM-L HVW
XM-L2
XM-L RGB
XP-E
XP-E HEW
XP-E2
XP-G
XP-G2
XP-L
XQ-D
XQ-E
XR-E
XT-E
XT-E HVW

Optogan

OLP-X5050F6L
OLP-5065F6L-06A

Osrarn

DDR
Duris E5
DurisP5
DurisS5
DurisS8
GDr
GDr+
JR Dragon
OsIsq EC
OsIsq PC
OsI SSL150
OsI SSL80
Ostar L
Ostar L+
Ostar-SMT RGB
PDr
PrL C AC (LEP-2000)
PrL C AC (LEP-800)
PrL C Z3 LES19
PrL C Z3 LES23
PrL C Z3 LES9
PrL C Z4 LES19
SFH-4751
SFH 4715S (IR)
Soleriq E30
Soleriq P6
Soleriq P9
Soleriq S13
Soleriq S19

Tridonic

S-SLE G2 LES19
S-SLE G2 LES23
S-SLE G2 LES26
S-SLE G3 LES19
S-SLE G3 LES23
S-SLE-P G3 LES10
S-SLE-P G3 LES17

Stanley

Stanley3J
Stanley6J

Nichia

107
COB204
NC4U133A
NC4U134A
NCSU033A
NCSU033B
NCSU034A
NCSU034B
NCSxx19A
NCSxx19B
NF2x757A
NF2x757D
NJSx036
NS3x83
NS6x83
NS9x383
NSBxL066A
NSBxL110
NSBxL121A
NSCxJ216A
NSCxL036A
NSMx286M
NSSW157T
NV5xx19A
NV5xx19B

Samsung

LC026BL/C040B
LH351A(3535)
LH351B
LM231 A/B
LM362A
LM561B
Sunnix5

Vossloh-Schwabe

WU-M-461
WU-M-462
WU-M-464
WU-M-484
WU-M-485
WU-M-486

LUXEON

LX A
LX CoB1203
LX CoB1204/1205
LX CoB1208
LX H50-2
LX K12
LX K16
LX K2
LX K4
LX K8
LX M
LX MZ
LX PWT
LX Q
LX R
LX Rebel
LX Rebel ES
LX Rebel+
LX S
LX S2000
LX S3000
LX S5000
LX T
LX TX
LX Z
LX Z ES
LX Z RGB
LZ4 RGB

Sharp

Double Dome
Mega Zenigata
Mini Zenigata
Tiger Zenigata

LedEngin

LZ1 (00U600)
LZ1 (00UA00)
LZ1 (00xW00)
LZ4 (00xW00)

Bridgelux

BXRA ES R
BXRA ES S
BXRA LS
BXRA RS
SM4
Vero10
Vero13
Vero18
Vero29
V6
V8
V10

Luminus

CSM-360-W
CXM-14
CXM-18
CXM-6
CXM-7
CXM-9
SSM-80
SST-50
SST 90

Seoul

MJT4040
AX3221
P4
P5
P7
Z5
Z5 M
Z5 M1
Z5 P
ZC12/18
ZC25/40
ZC6

Avago

Jade
5630

Citizen

CLL01x
CLL02x
CLL03x
CLL04x
CLL05x
CL-L230
CL-L233
CL-L251
CL-L300
CL-L340
CL-L400

LG

Cer 3535
COB-4W
COB-10W
COB-13W
COB-17W
COB-24W
H35B0
H35C0
H35C1
LG 3030
LG 5630
LG 6030

Lite-On

LTPL-M036
LTPL-M074

DDR = Diamond Dragon
OsIsq = Osion Square
Ostar L = Ostar Lighting
PrL C = PrevalLED Core
S-SLE = STARK SLE
S-SLE-P = STARK SLE PURE

Single lenses

LARISA

www.ledil.com/larisa



LARISA-O
PMMA / Black PC
H: 7,5 mm
D: 9,9 x 9,9 mm
Beam type: Oval



LARISA-W
PMMA / Black PC
H: 7,5 mm
D: 9,9 x 9,9 mm
Beam type: Wide



LARISA-M
PMMA / Black PC
H: 7,5 mm
D: 9,9 x 9,9 mm
Beam type: Medium

Code	Typ. FWHM	Typ. Eff.	Typ. cd/lm
LARISA-M	32	86	2,2
LARISA-O	40 x 22	81	2,1
LARISA-RS	19	80	3,7
LARISA-W	48	85	1,2
LARISA-WW	57	84	0,9
LARISA-RZ	27	77	1,9



LARISA-RZ
PMMA / Black PC
H: 7,5 mm
D: 9,9 x 9,9 mm

XP-E
XP-G
XB-D
NCsxx19A
NF2x757A
NF2x757D
NVsxx19A
OsSL150
OsSL80
OsSg EC
OsSg PC
DuriSS5
LX A
LX Rebel
LX Rebel ES
LX Z
H35C0
H35B0

LISA

www.ledil.com/lisa



LISA-SS
PMMA / White PC
H: ≈7,3 mm
D: 10,8 mm
Beam type:
Smooth spot



LISA-RS
PMMA / White PC
H: ≈7,3 mm
D: 10,8 mm
Beam type: Real spot

XP-E
XP-G
LX Rebel
GDr
PDr
Z5

LISA2

www.ledil.com/lisa2



LISA2-RS-PIN
PMMA / Black PC
H: ≈6,6 mm
D: 9,9 mm
Beam type: Real spot

LISA2-R-PIN
Hyper Reflective white PC
H: ≈6,6 mm
D: 9,9 mm
Beam type: Extra² wide

Code	Typ. FWHM	Typ. eff.	Typ. cd/lm
LISA2-M	22	89	2,8
LISA2-O	45 x 21	82	2,2
LISA2-O-90	19 x 48	82	2,2
LISA2-O-90-PIN	48+18°	83	TBA
LISA2-RS	19	89	3,1
LISA2-W	34	88	1,8
LISA2-WW	46	89	1,1
LISA2-WWW	80	83	0,4



H35C1
H35C0
OsSg EC
OsSL150
OsSL80
SFH 4715S (IR)
DuriPS
LX A
LX H50-2
LX Q
LX Rebel ES
LX Rebel
LX Z
LX Z ES
DomiLe Dome
NCsxx19A
NCsxx19B
NVsxx19A
XB-D
XP-E
XP-E2
XP-G
XP-G2
XT-E
XO-E
Z5

FWHM angles, efficiencies and cd/lm values contained herein are typical values. Actual measured values depend of the specific LED/optic combination. Go to www.ledil.com for LED specific values and optical datasheets.

Single lenses

TINA

www.ledil.com/tina



TINA-WW
PMMA / White PC
H: ≈10 mm
D: 16,1 mm
Beam type:
Extra wide

Code	Typ. FWHM	Typ. eff.	Typ. cd/lm
TINA-D	16	92	6,1
TINA-M	29	88	2,1
TINA-O	34 x 15	89	3,4
TINA-RS	13	93	10,9
TINA-W	48	91	1,3
TINA-WW	61	91	0,8

TINA2

www.ledil.com/tina2



TINA2-R-CLIP16
Hyper Reflective white PC
H: 10,1 mm
D: 16,1 mm
Beam type: Wide



TINA2-SS
PMMA / PC
H: ≈10 mm
D: 16,1 mm
Beam type:
Smooth spot



TINA2-M
PMMA / PC
H: ≈10 mm
D: 16,1 mm
Beam type: Medium

Code	Typ. FWHM	Typ. eff.	Typ. cd/lm
TINA2-D	16	89	6,9
TINA2-M	29	86	2,5
TINA2-O	35 x 16	87	3,5
TINA2-RS	14	91	10,4
TINA2-W	46	87	1,37
TINA2-WW	58	87	0,9
TINA2-R	TBA	TBA	TBA

TINA3

www.ledil.com/tina3



TINA3-S
PMMA / White PC
H: 11,5 mm
D: 16,1 mm
Beam type: Spot



TINA3-W
PMMA / White PC
H: ≈7 mm
D: 16,1 mm
Beam type: Wide

Code	Typ. FWHM	Typ. eff.	Typ. cd/lm
TINA3-00	59 x 39	90	1,20
TINA3-S	13	77	8,40
TINA3-W	39	90	1,70
TINA3-WW	53	90	1,00
TINA3-WWW	71	88	0,60

FLORENTINA

www.ledil.com/products

TINA2-L12 multiholder
12-up with glare
protection

FLORENTINA-SHD

PC
H: 22,5 mm
D: 286.8 x 27,5 mm



FLORENTINA-HLD

PC
H: 10,2 mm
D: 285,6 x 19,5 mm

LX-A | LX-T
LX Rebel
LX Rebel ES
LX H50-2
LX Z ES
GDr+
Od SSL150
Od SSL80
SFH 47155 (R)
MX-6 | XP-E
XP-G | XT-E
XP-G2
NCSxx19A
NSxx83
LH531A (G555)
3535H
Z5 | Z5 M

MX-6 | XB-D
XDL | XM-L2
XP-E | XP-E2
XP-E | XP-E2
XP-E | HEW
XP-G | XP-G2
XT-E
CL-L400
OIPxx5050FOL
NCSxx19A
NF2x757A
NSxx83
NSxx83
NSxx83
NSxx153
NCSxx19A
NCSxx19B
LX Z ES
LX R | LX T
LX Rebel
LX Rebel ES < A
DuriS5
GDr+
Od Sq EC
Od Sq PC
Od SSL150
Od SSL80
SFH 47155 (R)
Z5
Judo
H35C6
H35B0
H35C1

ROSE

www.ledil.com/rose



ROSE Extra
wide

Material: PC / PC
H: 13,5 mm
D: 21,6 x 21,6 mm



ROSE Medium

Material: PC / PC
H: 15,6 mm
D: 21,6 x 21,6 mm

Beam type code	Typ. FWHM	Typ. eff.	Typ. cd/lm
-D	16	85	7.1
-M	30	83	2.5
-MD	24	TBA	TBA
-O	43 x 15	81	3.1
-O-90	13 x 44	81	3.6
-RS	11	88	21.7
-SS	15	87	9.37
-W	51	81	1.1
-WW	59	TBA	0.78
-WWW	80	84	0.4

- MC-E
MX-3
MX-6
XM-L
XM-L EZW
XM-L2
XP-E
XP-E-HEW
XP-G
XR-E
P4
Z5
GDr+
NJSX036
N56x83
N59x153
NC5U033A
LX K2
LX Rebel
LX Rebel ES
LX Rebel ES +
OLP-xS050F6L
Stanley3J
Stanley6J
H35C0

ROSE-UV

www.ledil.com/rose

LEDiL's next generation of UV optics for Nichia type packaged UV-LEDs offers substantially improved performance and durability over previous generation optics. With the introduction of new materials such as optical grade silicones LEDiL has been able to considerably increase optical efficiency and UV resistance of the optics.

- NCSU033A
NCSU033B
NC4U133A
NCSU034A
NCSU034B
NC4U134A



FCA14011 G2-

NIS033U-S
Silicone/PC
H: 12.9 mm
D: 21.6 x 21.6 mm
Efficiency: 92%
Beam type: Spot



FCA14405 G2-

NIS033U-M
Silicone/PC
H: 12.9 mm
D: 21.6 x 21.6 mm
Efficiency: 91%
Beam type: Medium




FCA14464 G2-

NIS033U-W
Silicone/PC
H: 12.9 mm
D: 21.6 x 21.6 mm
Beam type: Wide

SIRI-A

www.ledil.com/siri

SIRI family is a series of specialty optics for wide area lighting applications.



SIRI-A

PMMA
H: 13,9 mm
D: 4,2 mm
Beam type:
Wide area lighting



SIRI-DOME

PMMA
H: 13,9 mm
D: 4,9 mm
LED cover with no
effect on the light



SIRI-DIFF

PMMA
H: 13,9 mm
D: 4,9 mm

- XP-E
 XB-D
 XM-L
 XM-L2
 XP-G
 XP-G2
 XT-E
 Os|S_q EC
 Os|S_q PC
 Os|SSL150
 N59x383
 NV5xx19A
 NV5xx19B
 LX A
 LX R
 LX Rebel ES

TWIDDLE

www.ledil.com/twiddle

Code	Typ. FWHM	Typ. eff.	Typ. cd/lm
TWIDDLE-D	20	81	TBA
TWIDDLE-M	32	72	TBA
TWIDDLE-RZ-D	TBA	TBA	TBA
TWIDDLE-RZ-M	TBA	TBA	TBA



TWIDDLE-D

PMMA
H: 14,3 mm
D: 21,6 mm
Beam type:
Diffused spot

- NS6x83
MX-6
XR-E
XP-G
XP-G2
XT-F

FWHM angles, efficiencies and cd/lm values contained herein are typical values. Actual measured values depend of the specific LED/optic combination. Go to www.lumileds.com for LED specific values and optical datasheets.

Single lenses

LAURA GenII

www.ledil.com/laura

LAURA GenII is the next generation of LEDi's classic LAURA family. New LAURA GenII optics feature new thinner holder design. GenII optics are backwards compatible with previous generations and offer the same beam specifications and exceptional quality of light at even more affordable price.



G2-LAURA-0-WAS

PMMA / PC
H: ≈ 13 mm
D: 21,6 x 21,6 mm
Beam type:
Wall washer

GenII LAURA ordering codes	Typ. FWHM	Typ. eff.	Typ. cd/lm
CA13629 G2-LAURA-D-P	13	93	9,3
CA13627 G2-LAURA-M-P	30	92	2,6
CA13631 G2-LAURA-O-P	40 x 13	91	4,8
CA13628 G2-LAURA-RS-P	8	93	33,2
CA13630 G2-LAURA-SS-P	11	93	16,5
CA13634 G2-LAURA-W-P	66	91	1,55
CA13633 G2-LAURA-WW-P	46	86	0,7
CA13636 G2-LAURA-R-XW-P	72	86	0,6
CA13632 G2-LAURA-R-W-P	70	81	0,8
CA13639 G2-LAURA-SS-WAS-P	Asymmetric	92	11,6
CA13638 G2-LAURA-O-WAS-P	Asymmetric	84	2,6
CA13637 G2-LAURA-O90-P	TBA	TBA	TBA



G2-LAURA-WW

PMMA/PC
H: ≈ 13 mm
D: 21,6 x 21,6 mm
Beam type:
Extra wide



G2-LAURA-M

PMMA/PC
H: ≈ 13 mm
D: 21,6 x 21,6 mm
Beam type:
Medium



G2-LAURA-RS

PMMA / PC
H: ≈ 13 mm
D: 21,6 x 21,6 mm
Beam type: Real spot

Ostar L
OslSq EC
OslSq PC
Osl SSL150
Osl SSL80
SFH 47155 (R)
XB-D
XP-E2
XP-E
XP-E-Hew
XP-G
XP-G2
XP-L
XT-E
Cer 3535
H35C0
H35C1
Stanley3J
Stanley6J

107
NCSxx19A
NCSxx19B
NF2x757A
NS9x153
NV5xx19A
LX A
LX H50-2
LX PWT
LX Q
LX R
LX Rebel
LX Rebel ES
LXT
LX Z ES
Double Dome
CL-L400
Jade
Z5

LAURA

www.ledil.com/laura



LAURA-RS

PMMA / PC
H: ≈ 13 mm
D: 21,6 x 21,6 mm
Beam type: Real spot



LAURA-R-XW

Hyper Reflective
PC / PC
H: ≈ 13 mm
D: 21,6 x 21,6 mm
Beam type:
Extra² wide

Ostar L
Os|Sq EC
Os|Sq PC
Os|SSL150
Os|SSL80
SFH 47155 (IR)
XB-D XT-E
XP-E2 XP-E
XP-E-HEW XP-E
XP-G XP-G2
Csr 3535
H35C0 H35C1
NCSxx19A 10
NCSxx19B
NF2x757A
NS9x153
NV5xx19A
LX A LXT
LX H50-2

LX PWT
LX Rebel LX P
LX Rebel ES
LX Z ES LX Q
Stanley3J
Stanley 6J
Double Dome
CL-L400
Iade 75

Code	Typ. FWHM	Typ. eff.	Typ. cd/lm
LAURA-D	15	88	6,2
LAURA-M	29	88	2,5
LAURA-O	40 x 12	88	4,3
LAURA-RS	8	93	30,5
LAURA-SS	11	91	14,5
LAURA-W	42	88	1,7
LAURA-WW	66	86	0,70
LAURA-XW	72	85	0,6
LAURA-R-W	70	77	0,52



LAURA-SS-
WAS

PMMA/PC
H: ≈ 13 mm
D: 21,6 x 21,6 mm
Beam type:
Wall washer

The information contained herein is the property of LEDiL Oy, Salorankatu 10, FI-24240 SALO, Finland, and is subject to change without prior notice. Please visit www.ledil.com for additional information, such as the latest photometric files, 3D mechanical models, and application notes relating to handling, gluing and taping.

LEILA GenII

www.ledil.com/leila

New LEILA GenII is the next generation of LEDiL's classic LEILA family, featuring a new thinner holder design.

GenII optics are backwards compatible with previous generations offering same beam specifications and exceptional quality of light at even more affordable price.



LEILA-G2-O-90

PMMA / PC
H: 14,7 mm
D: 21,6 mm
Beam type: Oval



LEILA-G2 Real Spot

PMMA / PC
D: 21,6 mm
H: 14,7 mm



LEILA-G2-D

PMMA / PC
H: 14,77 mm
D: 21,6 mm

GenII LEILA ordering codes	Typ. FWHM	Typ. eff.	Typ. cd/lm
CA14511_G2-LXP2-O-90-P	11 x 39	89	4,6
CA14512_G2-LXP2-O-90	11 x 39	89	4,6
CA14503_G2-LXP2-RS-P	9,6	94	23,1
CA14504_G2-LXP2-RS	9,6	94	23,1
CA14505_G2-LXP2-RS2-P	8,5	90	22,1
CA14506_G2-LXP2-RS2	8,5	90	22,1
CA14507_G2-LXP2-D-P	TBA	TBA	TBA
CA14508_G2-LXP2-D	TBA	TBA	TBA
CA14509_G2-LXP2-M-P	TBA	TBA	TBA
CA14510_G2-LXP2-M	TBA	TBA	TBA



LEILA

www.ledil.com/leila

LEILA-R-CLIP16

Hyper reflective PC
H: 13 mm
D: 21,6 mm
Typ. FWHM: 73°
Typ. efficiency: 90%
Beam type: Extra² Wide



LEILA Real Spot

PMMA / PC
D: 21,6 mm
H: 13,3 mm



LEILA-M

PMMA / PC
H: ≈13 mm
D: 21,6 mm
Beam type: Medium

Beam type code	Typ. FWHM	Typ. eff.	Typ. cd/lm
-MD	24	90	TBA
-O	39 x 11	88	4,8
-O-90	11 x 39	89	4,6
-REC	37 x 26	84	2,4
-RS	9,6	94	23,1
-RS2	8,5	90	22,1
-SS	12	TBA	
-W	42	90	1,6
-WW	42	TBA	TBA
-WAS	Asymm.	TBA	TBA

LEILA for UV lighting

Special products made of COP, an extremely UV-withstanding material suitable for various UV-lighting applications.



FCN12592_LE1-D-COP

LedEngin 5W UV (365nm)
Material: COP / PC
H: 15,1 mm
D: 21,6 mm
FWHM: 12°
Beam type: Smooth spot
Efficiency: 92%



FCN12592_LE1-D-COP

LedEngin 5W UV (400 nm)
Material: COP / PC
H: 15,1 mm
D: 21,6 mm
FWHM: 12°
Beam type: Smooth spot
Efficiency: 92%

107
NC5xx19A
NC5xx19B
NP2x757A
N5xx83
N5xx83B
NV5xx19A
NV5xx19B
OD1
OD2
OD3
OD4
OD5
OD6
OD7
OD8
OD9
OD10
OD11
OD12
OD13
OD14
OD15
OD16
OD17
OD18
OD19
OD20
OD21
OD22
OD23
OD24
OD25
OD26
OD27
OD28
OD29
OD30
OD31
OD32
OD33
OD34
OD35
OD36
OD37
OD38
OD39
OD40
OD41
OD42
OD43
OD44
OD45
OD46
OD47
OD48
OD49
OD50
OD51
OD52
OD53
OD54
OD55
OD56
OD57
OD58
OD59
OD60
OD61
OD62
OD63
OD64
OD65
OD66
OD67
OD68
OD69
OD70
OD71
OD72
OD73
OD74
OD75
OD76
OD77
OD78
OD79
OD80
OD81
OD82
OD83
OD84
OD85
OD86
OD87
OD88
OD89
OD90
OD91
OD92
OD93
OD94
OD95
OD96
OD97
OD98
OD99
OD100
OD101
OD102
OD103
OD104
OD105
OD106
OD107
OD108
OD109
OD110
OD111
OD112
OD113
OD114
OD115
OD116
OD117
OD118
OD119
OD120
OD121
OD122
OD123
OD124
OD125
OD126
OD127
OD128
OD129
OD130
OD131
OD132
OD133
OD134
OD135
OD136
OD137
OD138
OD139
OD140
OD141
OD142
OD143
OD144
OD145
OD146
OD147
OD148
OD149
OD150
OD151
OD152
OD153
OD154
OD155
OD156
OD157
OD158
OD159
OD160
OD161
OD162
OD163
OD164
OD165
OD166
OD167
OD168
OD169
OD170
OD171
OD172
OD173
OD174
OD175
OD176
OD177
OD178
OD179
OD180
OD181
OD182
OD183
OD184
OD185
OD186
OD187
OD188
OD189
OD190
OD191
OD192
OD193
OD194
OD195
OD196
OD197
OD198
OD199
OD200
OD201
OD202
OD203
OD204
OD205
OD206
OD207
OD208
OD209
OD210
OD211
OD212
OD213
OD214
OD215
OD216
OD217
OD218
OD219
OD220
OD221
OD222
OD223
OD224
OD225
OD226
OD227
OD228
OD229
OD230
OD231
OD232
OD233
OD234
OD235
OD236
OD237
OD238
OD239
OD240
OD241
OD242
OD243
OD244
OD245
OD246
OD247
OD248
OD249
OD250
OD251
OD252
OD253
OD254
OD255
OD256
OD257
OD258
OD259
OD260
OD261
OD262
OD263
OD264
OD265
OD266
OD267
OD268
OD269
OD270
OD271
OD272
OD273
OD274
OD275
OD276
OD277
OD278
OD279
OD280
OD281
OD282
OD283
OD284
OD285
OD286
OD287
OD288
OD289
OD290
OD291
OD292
OD293
OD294
OD295
OD296
OD297
OD298
OD299
OD300
OD301
OD302
OD303
OD304
OD305
OD306
OD307
OD308
OD309
OD310
OD311
OD312
OD313
OD314
OD315
OD316
OD317
OD318
OD319
OD320
OD321
OD322
OD323
OD324
OD325
OD326
OD327
OD328
OD329
OD330
OD331
OD332
OD333
OD334
OD335
OD336
OD337
OD338
OD339
OD340
OD341
OD342
OD343
OD344
OD345
OD346
OD347
OD348
OD349
OD350
OD351
OD352
OD353
OD354
OD355
OD356
OD357
OD358
OD359
OD360
OD361
OD362
OD363
OD364
OD365
OD366
OD367
OD368
OD369
OD370
OD371
OD372
OD373
OD374
OD375
OD376
OD377
OD378
OD379
OD380
OD381
OD382
OD383
OD384
OD385
OD386
OD387
OD388
OD389
OD390
OD391
OD392
OD393
OD394
OD395
OD396
OD397
OD398
OD399
OD400
OD401
OD402
OD403
OD404
OD405
OD406
OD407
OD408
OD409
OD410
OD411
OD412
OD413
OD414
OD415
OD416
OD417
OD418
OD419
OD420
OD421
OD422
OD423
OD424
OD425
OD426
OD427
OD428
OD429
OD430
OD431
OD432
OD433
OD434
OD435
OD436
OD437
OD438
OD439
OD440
OD441
OD442
OD443
OD444
OD445
OD446
OD447
OD448
OD449
OD450
OD451
OD452
OD453
OD454
OD455
OD456
OD457
OD458
OD459
OD460
OD461
OD462
OD463
OD464
OD465
OD466
OD467
OD468
OD469
OD470
OD471
OD472
OD473
OD474
OD475
OD476
OD477
OD478
OD479
OD480
OD481
OD482
OD483
OD484
OD485
OD486
OD487
OD488
OD489
OD490
OD491
OD492
OD493
OD494
OD495
OD496
OD497
OD498
OD499
OD500
OD501
OD502
OD503
OD504
OD505
OD506
OD507
OD508
OD509
OD510
OD511
OD512
OD513
OD514
OD515
OD516
OD517
OD518
OD519
OD520
OD521
OD522
OD523
OD524
OD525
OD526
OD527
OD528
OD529
OD530
OD531
OD532
OD533
OD534
OD535
OD536
OD537
OD538
OD539
OD540
OD541
OD542
OD543
OD544
OD545
OD546
OD547
OD548
OD549
OD550
OD551
OD552
OD553
OD554
OD555
OD556
OD557
OD558
OD559
OD560
OD561
OD562
OD563
OD564
OD565
OD566
OD567
OD568
OD569
OD570
OD571
OD572
OD573
OD574
OD575
OD576
OD577
OD578
OD579
OD580
OD581
OD582
OD583
OD584
OD585
OD586
OD587
OD588
OD589
OD590
OD591
OD592
OD593
OD594
OD595
OD596
OD597
OD598
OD599
OD600
OD601
OD602
OD603
OD604
OD605
OD606
OD607
OD608
OD609
OD610
OD611
OD612
OD613
OD614
OD615
OD616
OD617
OD618
OD619
OD620
OD621
OD622
OD623
OD624
OD625
OD626
OD627
OD628
OD629
OD630
OD631
OD632
OD633
OD634
OD635
OD636
OD637
OD638
OD639
OD640
OD641
OD642
OD643
OD644
OD645
OD646
OD647
OD648
OD649
OD650
OD651
OD652
OD653
OD654
OD655
OD656
OD657
OD658
OD659
OD660
OD661
OD662
OD663
OD664
OD665
OD666
OD667
OD668
OD669
OD670
OD671
OD672
OD673
OD674
OD675
OD676
OD677
OD678
OD679
OD680
OD681
OD682
OD683
OD684
OD685
OD686
OD687
OD688
OD689
OD690
OD691
OD692
OD693
OD694
OD695
OD696
OD697
OD698
OD699
OD700
OD701
OD702
OD703
OD704
OD705
OD706
OD707
OD708
OD709
OD710
OD711
OD712
OD713
OD714
OD715
OD716
OD717
OD718
OD719
OD720
OD721
OD722
OD723
OD724
OD725
OD726
OD727
OD728
OD729
OD730
OD731
OD732
OD733
OD734
OD735
OD736
OD737
OD738
OD739
OD740
OD741
OD742
OD743
OD744
OD745
OD746
OD747
OD748
OD749
OD750
OD751
OD752
OD753
OD754
OD755
OD756
OD757
OD758
OD759
OD760
OD761
OD762
OD763
OD764
OD765
OD766
OD767
OD768
OD769
OD770
OD771
OD772
OD773
OD774
OD775
OD776
OD777
OD778
OD779
OD780
OD781
OD782
OD783
OD784
OD785
OD786
OD787
OD788
OD789
OD790
OD791
OD792
OD793
OD794
OD795
OD796
OD797
OD798
OD799
OD800
OD801
OD802
OD803
OD804
OD805
OD806
OD807
OD808
OD809
OD810
OD811
OD812
OD813
OD814
OD815
OD816
OD817
OD818
OD819
OD820
OD821
OD822
OD823
OD824
OD825
OD826
OD827
OD828
OD829
OD830
OD831
OD832
OD833
OD834
OD835
OD836
OD837
OD838
OD839
OD840
OD841
OD842
OD843
OD844
OD845
OD846
OD847
OD848
OD849
OD850
OD851
OD852
OD853
OD854
OD855
OD856
OD857
OD858
OD859
OD860
OD861
OD862
OD863
OD864
OD865
OD866
OD867
OD868
OD869
OD870
OD871
OD872
OD873
OD874
OD875
OD876
OD877
OD878
OD879
OD880
OD881
OD882
OD883
OD884
OD885
OD886
OD887
OD888
OD889
OD890
OD891
OD892
OD893
OD894
OD895
OD896
OD897
OD898
OD899
OD900
OD901
OD902
OD903
OD904
OD905
OD906
OD907
OD908
OD909
OD910
OD911
OD912
OD913
OD914
OD915
OD916
OD917
OD918
OD919
OD920
OD921
OD922
OD923
OD924
OD925
OD926
OD927
OD928
OD929
OD930
OD931
OD932
OD933
OD934
OD935
OD936
OD937
OD938
OD939
OD940
OD941
OD942
OD943
OD944
OD945
OD946
OD947
OD948
OD949
OD950
OD951
OD952
OD953
OD954
OD955
OD956
OD957
OD958
OD959
OD960
OD961
OD962
OD963
OD964
OD965
OD966
OD967
OD968
OD969
OD970
OD971
OD972
OD973
OD974
OD975
OD976
OD977
OD978
OD979
OD980
OD981
OD982
OD983
OD984
OD985
OD986
OD987
OD988
OD989
OD990
OD991
OD992
OD993
OD994
OD995
OD996
OD997
OD998
OD999
OD1000
OD1001
OD1002
OD1003
OD1004
OD1005
OD1006
OD1007
OD1008
OD1009
OD1010
OD1011
OD1012
OD1013
OD1014
OD1015
OD1016
OD1017
OD1018
OD1019
OD1020
OD1021
OD1022
OD1023
OD1024
OD1025
OD1026
OD1027
OD1028
OD1029
OD1030
OD1031
OD1032
OD1033
OD1034
OD1035
OD1036
OD1037
OD1038
OD1039
OD1040
OD1041
OD1042
OD1043
OD1044
OD1045
OD1046
OD1047
OD1048
OD1049
OD1050
OD1051
OD1052
OD1053
OD1054
OD1055
OD1056
OD1057
OD1058
OD1059
OD1060
OD1061
OD1062
OD1063
OD1064
OD1065
OD1066
OD1067
OD1068
OD1069
OD1070
OD1071
OD1072
OD1073
OD1074
OD1075
OD1076
OD1077
OD1078
OD1079
OD1080
OD1081
OD1082
OD1083
OD1084
OD1085
OD1086
OD1087
OD1088
OD1089
OD1090
OD1091
OD1092
OD1093
OD1094
OD1095
OD1096
OD1097
OD1098
OD1099
OD1100
OD1101
OD1102
OD1103
OD1104
OD1105
OD1106
OD1107
OD1108
OD1109
OD1110
OD1111
OD1112
OD1113
OD1114
OD1115
OD1116
OD1117
OD1118
OD1119
OD1120
OD1121
OD1122
OD1123
OD1124
OD1125
OD1126
OD1127
OD1128
OD1129
OD1130
OD1131
OD1132
OD1133
OD1134
OD1135
OD1136
OD1137
OD1138
OD1139
OD1140
OD1141
OD1142
OD1143
OD1144
OD1145
OD1146
OD1147
OD1148
OD1149
OD1150
OD1151
OD1152
OD1153
OD1154
OD1155
OD1156
OD1157
OD1158
OD1159
OD1160
OD1161
OD1162
OD1163
OD1164
OD1165
OD1166
OD1167
OD1168
OD1169
OD1170
OD1171
OD1172
OD1173
OD1174
OD1175
OD1176
OD1177
OD1178
OD1179
OD1180
OD1181
OD1182
OD1183
OD1184
OD1185
OD1186
OD1187
OD1188
OD1189
OD1190
OD1191
OD1192
OD1193
OD1194
OD1195
OD1196
OD1197
OD1198
OD1199
OD1200
OD1201
OD1202
OD1203
OD1204
OD1205
OD1206
OD1207
OD1208
OD1209
OD1210
OD1211
OD1212
OD1213
OD1214
OD1215
OD1216
OD1217
OD1218
OD1219
OD1220
OD1221
OD1222
OD1223
OD1224
OD1225
OD1226
OD1227
OD1228
OD1229
OD1230
OD1231
OD1232
OD1233
OD1234
OD1235
OD1236
OD1237
OD1238
OD1239
OD1240
OD1241
OD1242
OD1243
OD1244
OD1245
OD1246
OD1247
OD1248
OD1249
OD1250
OD1251
OD1252
OD1253
OD1254
OD1255
OD1256
OD1257
OD1258
OD1259
OD1260
OD1261
OD1262
OD1263
OD1264
OD1265
OD1266
OD1267
OD1268
OD1269
OD1270
OD1271
OD1272
OD1273
OD1274
OD1275
OD1276
OD1277
OD1278
OD1279
OD1280
OD1281
OD1282
OD1283
OD1284
OD1285
OD1286
OD1287
OD1288
OD1289
OD1290
OD1291
OD1292
OD1293
OD1294
OD1295
OD1296
OD1297
OD1298
OD1299
OD1300
OD1301
OD1302
OD1303
OD1304
OD1305
OD1306
OD1307
OD1308
OD1309
OD1310
OD1311
OD1312
OD1313
OD1314
OD1315
OD1316
OD1317
OD1318
OD1319
OD1320
OD1321
OD1322
OD1323
OD1324
OD1325
OD1326
OD1327
OD1328
OD1329
OD1330
OD1331
OD1332
OD1333
OD1334
OD1335
OD1336
OD1337
OD1338
OD1339
OD1340
OD1341
OD1342
OD1343
OD1344
OD1345
OD1346
OD1347
OD1348
OD1349
OD1350
OD1351
OD1352
OD1353
OD1354
OD1355
OD1356
OD1357
OD1358
OD1359
OD1360
OD1361
OD1362
OD1363
OD1364
OD1365
OD1366
OD1367
OD1368
OD1369
OD1370
OD1371
OD1372
OD1373
OD1374
OD1375
OD1376
OD1377
OD1378
OD1379
OD1380
OD1381
OD1382
OD1383
OD1384
OD1385
OD1386
OD1387
OD1388
OD1389
OD1390
OD1391
OD1392
OD1393
OD1394
OD1395
OD1396
OD1397
OD1398
OD1399
OD1400
OD1401
OD1402
OD1403
OD1404
OD1405
OD1406
OD1407
OD1408
OD1409
OD1410
OD1411
OD1412
OD1413
OD1414
OD1415
OD1416
OD1417
OD1418
OD1419
OD1420
OD1421
OD1422
OD1423
OD1424
OD1425
OD1426
OD1427
OD1428
OD1429
OD1430
OD1431
OD1432
OD1433
OD1434
OD1435
OD1436
OD1437
OD1438
OD1439
OD1440
OD1441
OD1442
OD1443
OD1444
OD1445
OD1446
OD1447
OD1448
OD1449
OD1450
OD1451
OD1452
OD1453
OD1454
OD1455
OD1456
OD1457
OD1458
OD1459
OD1460
OD1461
OD1462
OD1463
OD1464
OD1465
OD1466
OD1467
OD1468
OD1469
OD1470
OD1471
OD1472
OD1473
OD1474
OD1475
OD1476
OD1477
OD1478
OD1479
OD1480
OD1481
OD1482
OD1483
OD1484
OD1485
OD1486
OD1487
OD1488
OD1489
OD1490
OD1491
OD1492
OD1493
OD1494
OD1495
OD1496
OD1497
OD1498
OD1499
OD1500
OD1501
OD1502
OD1503
OD1504
OD1505
OD1506
OD1507
OD1508
OD1509
OD151

Single lenses

SPH 4715S (IR)

IRENE

www.ledil.com/products

LEDiL's IRENE is especially developed with square beam-pattern for IR-CCT camera chip compatibility.



IRENE-IR-16
PMMA / PC
H: 14,3 mm
D: 21,6 mm
FWHM: 20° + 19°
[sim.]

Code	Typ. FWHM	Height	Diameter
IRENE-IR-4	67° + 67°	14,3	21,6
IRENE-IR-8	32° + 32°	14,3	21,6
IRENE-IR-12	25° + 25°	14,3	21,6
IRENE-IR-16	20° + 19° [sim.]	14,3	21,6
IRENE-IR-25	11° + 9° [sim.]	14,3	21,6

IRINA

www.ledil.com/irina

XP-E
XP-G



IRINA-RS

PMMA / PC
H: 11,7 mm
D: 24,7 mm
Beam type: Real spot

TITANUM / SPUTNIK

www.ledil.com/products

TITANUM / SPUTNIK family of optics for Osram and Seoul LEDs. Versions that have ordering code ending with -C have metallized coating making them suitable for potting. Go to www.ledil.com for specific order codes and more information.

Code	Typ. FWHM	Typ. eff.
TITANUM/SPUTNIK-M	26	87
TITANUM/SPUTNIK-O	36 X 8	89
TITANUM/SPUTNIK-SS	9	84
TITANUM/SPUTNIK-W	66	71



TITANUM/ SPUTNIK-90-C

PMMA / PC
H: 14,3 mm
D: 21,6 mm
Beam type: Oval

GD-L
PDI
IR Dragon
P4
P5

EMILY

www.ledil.com/emily



EMILY-O-WAS

PMMA,
H: 14,8 mm,
D: 26 mm
Beam type: Tilted oval

Code	Typ. FWHM	Typ. eff.	Typ. cd/1m
EMILY-SS-WAS	8	90	12
EMILY-O-WAS	43 x 10	87	3,6
EMILY-D	11	91	14
EMILY-M	18	91	7,4
EMILY-M2	29	89,2	3,05
EMILY-O	44 x 10	89	4,5
EMILY-O-90	45 x 10	89	4,2
EMILY-SS	11	80	13,4
EMILY-W	39	86	1,5
EMILY-WWW	58	86	1
EMILY-RS	8	90	29,5



EMILY-M

PMMA
H: 15,1 mm
D: 26 mm
Beam type: Medium



EMILY-WWW

PMMA
H: 13,3 mm
D: 26 mm
Beam type: Extra² wide



EMILY-O

PMMA
H: 15,1 mm
D: 26 mm
Beam type: Oval

Double Dome
LX-A
LX H50-2
LX Rebel
LX Rebel +
LX T
LX Rebel ES
OsSq EC
Os SSI 80
Os SSI 150
NCsxx19A
NCsxx19B
NVsxx19A
NVsxx19B
NS97383
XMA-L HWVW
XP-E
XP-E2
XP-G
XP-G2
XP-L
XM-L
XM-L2
XT-E
Z5
Z5 M1

EVA

www.ledil.com/eva**EVA-S**

PMMA
H: 16,4 mm
D: 35 mm
Beam type: Spot

**EVA-M**

PMMA / PC
H: 16,4 mm
D: 37,7 mm
Beam type: Medium

**EVA-WW**

PMMA / PC
H: 16,4 mm
D: 37,7 mm
Beam type: Extra wide

Code	Typ. FWHM	Typ. eff.	Typ. cd/lm
EVA-D	16	80	4,92
EVA-M	24	89	3,2
EVA-O	38 x 17	85	3,06
EVA-S	13	93	TBA
EVA-W	38	83	1,4
EVA-WW	53	82	1,7
C10685 EVA-M	26	89	2,8

**EVA-O**

PMMA
H: 16,4 mm
D: 35 mm
Beam type: Oval

MC-E
MK-R
XM-L
XM-L EZW
XM-L HVV
XM-L Z
XTE
XP-G2
NS9x383
NSMx286M
LXM
LXM2
DurisS8

MIRA

www.ledil.com/mira**MIRA-WW**

PC / PC
H: ≈16 mm
D: ≈35 mm
Beam type: Extra wide

**MIRA-M**

PC / PC
H: ≈16 mm
D: ≈35 mm
Beam type: Medium

**MIRA-W**

PC
H: 14,7 mm
D: 32,4 mm
Beam type: Wide

Code	Typ. FWHM	Typ. eff.	Typ. cd/lm
MIRA-M	28	83	2,1
MIRA-W	38	82	1,5
MIRA-WW	58	83	0,9

KIKI

www.ledil.com/products

KIKI-A lens designed for backlighting applications. An optical design carefully optimised for maximally uniform light distribution even for wider distances between LED placements.

**KIKI-A**

PMMA
H: 5,9 mm
D: 21,6 x 14 mm
Beam type: Wide-Area Lighting

Code	Typ. FWHM	Typ. eff.	Typ. cd/lm
KIKI-A	163	92	0,28
KIKI-B	TBA	TBA	TBA

LXT
XTE

EYA

www.ledil.com/eya**EYA-O**

PMMA / PC
H: 29,1 mm
D: 30,4 mm
Beam type: Oval

**EYA-S**

PMMA / PC
H: 29,1 mm
D: 30,4 mm
Beam type: Spot

JULIA-A

www.ledil.com/julia**JULIA-A**

PMMA
H: 4,8 mm
D: 18,8 mm
Beam type: Wide area lighting

Od SSI 150
Od SSI 80
IX Rebel
IX Rebel ES
XP-E
XP-E2
XP-G
XP-G2
XTE
NCsxx19A
NVsxx19A
Z3

Single lenses

HEIDI

www.ledil.com/heidi



HEIDI-WR

PMMA, H: 11,7 mm, D: 21,6 mm
Beam type: Round



HEIDI-W2

PMMA
H: 11,7 mm
D: 21,6 mm
Beam type: Wide



HEIDI-O

PMMA
H: 11,7 mm
D: 21,6 mm
Beam type: Oval

Code	Typ. FWHM	Typ. eff.	Typ. cd/lm
HEIDI-D	10	90	14,8
HEIDI-M	26	89	3,8
HEIDI-O	49 x 11	87	4,5
HEIDI-O-90	13 x 44	87	4,7
HEIDI-RS	8	92	21,8
HEIDI-SS	15	90	6,8
HEIDI-W	32	87	2,6
HEIDI-W2	45	80	1,1
HEIDI-WR	31	TBA	TBA
HEIDI-REC	TBA	TBA	TBA
HEIDI-REC-90	TBA	TBA	TBA

Os5q EC
Os5q PC
Os5S150
Os5S180
ML-E XM-L
XB-D XB-H
XP-E XP-E2
XT-E XP-L
XP-G XP-G2
Z5M1
Z5P1 Z5
Cer 3535
H35C0
107
NCsxx19A
NCsxx19B
NVsxx19A
NVsxx19B
NF2x757A
NS5W157T
LX H50-2
LX PWT
LX Rebel
LX Rebel LX A
LX Rebel ES
Double Dome

FLARE

www.ledil.com/flarefamily



FLARE-MINI-A

PMMA
H: 8,6 mm
D: 16 mm
Beam type: Oval



FLARE-C

PMMA
H: 14,6 mm
D: 24,5 x 24,5 mm
Beam type: Rectangular



FLARE-MAXI-D

PMMA
H: 16,7 mm
D: 33,9 x 33,9 mm
Beam type: Rectangular

Code	Typ. FWHM	Typ. eff.	Typ. cd/lm
FLARE-B	102 x 11	93	1,6
FLARE-C	87 x 8	93	3,2
FLARE-C-D	95 x 21	93	1
FLARE-MAXI	99 x 13	94	2,3
FLARE-MAXI-D	108 x 15	94	1,8
FLARE-MINI-A	106 x 20	94	1,1
FLARE-MINI-AD	98 x 19	94	1,1
FLARE-MINI-AD-PIN	98 x 19	94	1,1
FLARE-MINI-A-PIN	106 x 20	94	1
LEDIL-FLARE	138 x 20	92	1,3



FLARE-MAXI

PMMA
H: 16,7 mm
D: 33,9 x 33,9 mm
Beam type: Rectangular



FLARE-MINI-AD

PMMA
H: 8,6 mm
D: 16 mm
Beam type: Oval

LX A
LX K2
LX H50-2
LX M
LX M2
LX Rebel
LX Rebel ES
LXT
Double Dome
NCsxx19A
NCsxx19B
NS9xx383
NVsxx19A
NVsxx19B
Os5q EC
Os5q PC
Os5S150
Os5S180
ML-E
XB-D
XM-L
XM-L2
XP-E
XP-E2
XP-G
XP-G2
XP-L
XRE
XT-E
H35C0
H35C1
Z5
Z5M1
MC-E XP-L
XM-L XM-L2
XP-E XP-E2
XP-G XP-G2
ML-R XO-E
Os5S150
Os5S180
Ostar L
Os5q EC
SPT-L2 ML-R
LX H50-2
LX M LX M2
LX Rebel
LX Rebel ES
LXT
NCsxx19A
NVsxx19A
NS9xx383
SST-501 SST-90
Z5 Z5M1
H35C1

IRIS

www.ledil.com/iris



IRIS-O

PMMA/PC
H: ≈29 mm
D: 38 mm
Beam type: Oval



IRIS

PMMA/PC
H: ≈29 mm
D: 38 mm
Beam type: Spot



IRIS-M

PMMA/PC
H: ≈29 mm
D: 38 mm
Beam type: Medium

The information contained herein is the property of LEDIL Oy, Satorankatu 10, FI-24240 SALO, Finland, and is subject to change without prior notice. Please visit www.ledil.com for additional information, such as the latest photometric files, 3D mechanical models, and application notes relating to handling, gluing and taping.

BILLIE

www.ledil.com/billie
**BILLIE-A**

PMMA / PC
H: 16.1 mm
D: 21.5 mm
Beam type:
Asymmetric


**BILLIE-B**

PMMA / PC
H: 16.1 mm
D: 21.5 mm
Beam type:
Asymmetric

BILLIE, a rectangular wall-washing optic with excellent beam uniformity; another unique innovation made possible by LEDiL. Especially designed for indoor and outdoor architectural and billboard lighting, BILLIE is the perfect solution for small concealed fixtures.

APPLICATION EXAMPLE OF ENERGY EFFICIENT BILLBOARD LIGHTING

- Beam is tilted 18° to achieve even illumination of the billboard face
- Beam can be adjusted sideways with optional sublens
- Luminous flux: 884 lm
- Emin 104 lx, Emax 218 lx
- Typical uniformity 1:2



LX A
LX R
LX Rebel
LX Rebel ES
NCsxx19A
NF2x757A
N5SW1571
NVsxx19A
OdSSL80
OdSSL150
DurisS5
XB-D
XP-E
XP-G
XP-G2
XP-E
Z5

SEANNA-A

www.ledil.com/products
**SEANNA-A**

PMMA
D: 152,6 mm
H: 79 mm
Beam type: Real Spot

SEANNA's patent pending design has two optical elements. A primary TIR lens ensuring that all light will hit the secondary Fresnel resulting in maximum performance and efficiency.

- Optimized for a variety of high power LED's
- Peak value at 25m up to 800 cd/lm and spot as narrow as 1-3° depending on LED
- Holder design allows both pole and integrated installation options

Luxeon M			
Distance (m)	Cone Diameter (m)	Illuminance (lx)	
160.0	10.62	EIC0 1.9° 3	
320.0	21.23	EIC0 1.9° 1	
480.0	31.85	EIC0 1.9° 0	
640.0	42.46	EIC0 1.9° 0	
800.0	53.08	EIC0 1.9° 0	

— CD - C180 (Half-value Angle: 3.8°)

XP-E2			
Distance (m)	Cone Diameter (m)	Illuminance (lx)	
160.0	3.35	EIC0 0.6° 6	
320.0	6.70	EIC0 0.6° 1	
480.0	10.05	EIC0 0.6° 1	
640.0	13.40	EIC0 0.6° 0	
800.0	16.76	EIC0 0.6° 0	

— CD - C180 (Half-value Angle: 1.2°)

LX M
LX Rebel
LX Rebel ES
LX S
MK-R
XB-D
XM-L
XM-L2
XP-E
XP-E2
XP-G
XP-G2
XP-E
SSM-80

LX M LX A
LX Rebel
LX Rebel ES
LX M2 LX T
Doubt Dome

VERONICA

www.ledil.com/veronica

TIR lens for installations with potting resin.

**VERONICA-RS**

PMMA
H: 26 mm
D: 12,2 mm
Beam type: Real Spot

Code	Typ. FWHM	Typ. eff.	Typ. cd/lm
VERONICA-O	54 + 11°	84	4,2
VERONICA-RS	12	90	18,4
VERONICA-SQ-O	56+12	82	3,2
VERONICA-SQ-M	TBA	TBA	TBA
VERONICA-SQ-WW	TBA	TBA	TBA

AMELIA

www.ledil.com/products
**AMELIA-S**

PMMA
H: 45 mm
D: 27,1 mm
Beam type: Spot

LX S

FWHM angles, efficiencies and cd/lm values contained herein are typical values. Actual measured values depend of the specific LED/optic combination. Go to www.ledil.com for LED specific values and optical datasheets.

BLONDIE


www.ledil.com/blondie



Blade type wall grazing luminaires are good choices for emphasizing details and adding structure to buildings. LEDiL created the BLONDIE reflector which produces a very tight blade type wall washing beam with a single LED source using only a few watts of energy.

To shape the double-sided beam of BLONDIE further, it comes with three interchangeable inserts. With these additional reflector pieces, the backside light can easily be shaped into different angles.

LX A
LX M
LX MZ
LX Rebel
MK-R
XM-L2
XP-G
XP-G2
XP-E2
NV5x19B
Os!Sq EC

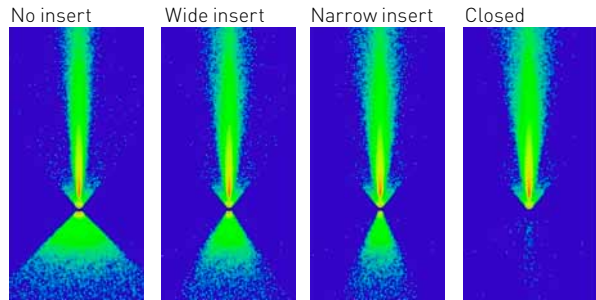


FRIDA-A

www.ledil.com/products




FRIDA-A FOR REFRIGERATOR LIGHTING

- Application area: 1,52 x 1,52 m
- Luminaire row installed along the centerline of the cabinet
- Emits light sideways giving optimal shelf illumination
- Eav: 795 lx
- Emin: 142 lx
- Emax: 2410 lx
- u0: 0,178



XP-G
XB-D



HELENA

www.ledil.com/helena

Diamond turning is the method of choice when producing some of the very highest class optics in the world. We have used it to make HELENA, fresnel type lens having surface accuracy of a hundredth of a millimetre. This means better light control and efficiency – lighting the LEDiL way.

LX K8
LX K12
LX K16
CXA15
CXA25



HELENA-A

PMMA
H: 11 mm
D: 72,8 mm
Beam type: Medium



HELENA-B

PMMA/PC
H: 11 mm
D: 72,8 mm
Beam type: Medium

RGB-MIXING

www.ledil.com/rgb

- LEDiL patented technology
- Proprietary and patented microstructured surfaces

Typical applications:

- RGBX for stage lighting and architectural applications
- Adaptive color temperature
- Perfect CRI



ANGELINA-RZ-S

PC / PC
H: 31 mm
D: 82 mm
Beam type: Spot
FWHM: 26°



ANGELA-RZ-W

PC / PC
H: 74,5 mm
D: 119,5 mm
Beam type: Wide
FWHM: 31°



GERI-RZ

PMMA/PC
H: 32,8 mm
D: 45 x 45 mm
Beam type: Wide
FWHM: 31°



RITA-A-RZ

Hyper Reflective PC
H: ≈19 mm
D: 35,1 x 28,9 mm
Beam type: Asymm.



RITA-WAS-RZ

Hyper Reflective PC
H: ≈17 mm
D: 31,9 x 28,4 mm
Beam type: Asymm.



REBECCA

PMMA / PC
H: 29,9 mm
D: 42 mm



MIRELLA-RZL

PC / PC
D: 49,9 mm
H: 25,8 mm
Beam types: -S, -M, -W, -XW

Code	Typ. FWHM	Typ. eff.	Typ. cd/lm
RGBX-M	30	70	TBA
RGBX-O	48+25	70	TBA
RGBX-SS	20	85	3,8
RGBX-HLD	TBA	TBA	TBA
RGBX2-M	34	68	1,5
RGBX2-O	48+24	66	1,5
RGBX2-S	20	77	4,6
ANGELA-RZ-S	10	90	11,0
ANGELA-RZ-M	18	84	3,0
ANGELA-RZ-W	38	83	1,4
ANGELA-RZ-XW	72	89	0,6
ANGELINA-RZ-S	25	89	1,8
ANGELINA-RZ-M	37	89	1,3
ANGELINA-RZ-W	54	89	1,0
ANGELINA-RZ-XW	TBA	TBA	TBA
REBECCA-RZ-WW	TBA	TBA	TBA

FWHM angles, efficiencies and cd/lm values contained herein are typical values. Actual measured values depend of the specific LED/optic combination. Go to www.ledil.com for LED specific values and optical datasheets.

SAGA

www.ledil.com/saga

- TIR lens in optical grade silicone
- Precision-molded frame in Hyper-Reflective White PC
- Zhaga compliant fastening with two M3 screws 35 mm apart
- Average optical efficiency of 92 %

SAGA-HB-IP-WHT

Silicone
H: 12 mm
D: 50 mm
Beam type: HighBay
Typical FWHM: 62°



CLL01x
CLL02x
CLL03x
CXA1304
CXA1816
CXA15
Vero10
BXRA ES S
V10
CXM-6
CXM-7
CXM-9
Soleriq P6
Soleriq P9
Soleriq S13
Mini Zenigata
LTPL-M036

STELLA

www.ledil.com/stella

- Self-sealing design simplifies luminaire design
- Very good thermal and UV-resistance
- Average optical efficiency of 92%
- STELLA-A street lighting lens featuring Type II / Type III light distribution depending on LES size
- STELLA-HB for warehouse and outdoor applications, works with COB's up to LES size 50

STELLA-A

Silicone
H: 22 mm
D: 90 mm
Beam type: Asymmetric



CLL03x
CLL04x
CLL05x
LX K12
LX K16
LX CoB1208
CXA15
CXA25
CXA30
CXA35
CXA1816
Vero13
Vero18
Vero29
CXM-18
Soleriq S19
Soleriq S13
Mega Zenigata
LTPL-M074

STELLA-HB

Silicone
H: 19.5 mm, D: 90 mm
Typical FWHM: 77°
Beam type: High Bay




JENNY

www.ledil.com/products

Cost effective silicone lens family designed for high power multi-crystal and COB LEDs. Can be installed with glue or optional holder.

JENNY-8X1-CY

Silicone
H: 11.5 mm
D: 280 x 35 mm
Typ. efficiency: 94%
Beam type: Wide area lighting




JENNY-HLD-A-BLK

PC
H: 5 mm
D: 34.8 x 50 mm



JENNY-CY

Silicone
H: 11.5 mm, D: 35 x 35 mm
Typical efficiency: 94%
Beam type: Wide area lighting



CLL01x
CLL02x
CXA1304
CXA1410
CXA15
CXA1520
MK-R
MK-6
XM-L EZW
LX M
NSMx286M
Mini Zenigata
V6
V8

EMERALD

www.ledil.com/emerald

EMERALD-A

PMMA

H: 7,3 mm

D: 21,6 mm

 Beam type: Rectangular
 Typical FWHM: 150° x 20°

Cost effective and new one-LED, one-optic solution for exit route lighting. With EMERALD's extremely wide beam distribution it's possible to achieve EN 1838 compliant lighting for installation height to distance ratios up to and beyond 1:7. Extended illumination range and single LED design reduces costs of the fixture and installation significantly.


 H35C0
 H35B0
 XB-D XE-E
 XM-L XM-L2
 XP-E XP-E2
 XP-G XP-G2
 OsSs EC
 OsSs PC
 OsSsL150
 OsSsL80
 Z5
 LX-A
 LX-M LX-MZ
 LX-Rebel
 LX-Rebel ES
 LX-R
 NCsxx19A
 NVsxx19A
 NS9x383

DOROTHY

www.ledil.com/dorothy

DOROTHY-4-A

PMMA

H: 4,5 mm

D: 50,6 mm

Beam type: Wide area

DOROTHY is an array of 4 side-emitting optics. It is designed for wide area lighting applications, especially anti-panic area lights.


 XP-E
 XP-E2
 XP-G
 XT-E
 XP-G2
 LX-A
 LX-R
 LX-Rebel
 LX-Rebel ES
 LX-Z ES
 NCsxx19A
 NCsxx19B
 NVsxx19A
 NVsxx19B

Code	Beam Type	Typ. FWHM	Typ. eff.	Typ. cd/lm
DOROTHY-4-A	Wide area	152	94	0,3
DOROTHY-4-B	Side-Emitting	TBA	TBA	TBA

LOTTA-A

www.ledil.com/products


LOTTA-A

PMMA

H: 3,6 mm

D: 19,6 + 15,4 mm

Beam type:

Wide area lighting

LOTTA is designed especially for wide-area and backlighting applications. This lens shares the mechanical design of LEDiL's classic single STRADA family. LOTTA is design to provide good uniformity over wide areas optimized for Philips Lumileds' Luxeon LEDs.

VENLA-IRIS

www.ledil.com/venla

VENLA-S-IRIS complements LEDiL's VENLA optics family by featuring one of the tightest spot beams available for Philips Lumileds' Luxeon S.



VENLA-S-IRIS

PMMA/PC

H: 27,2 mm

D: 45 mm

Beam type: Spot

 LX-S
 LX-M
 SSM-80
 XM-L
 XM-L2

OONA-A

www.ledil.com/products

OONA-A

PMMA

H: 4,5 mm

D: 9,9 x 9,9 mm

Beam type: Oval


 OsSs EC
 OsSs PC

Specialty products / Reflectors

SOPHIE

www.ledil.com/products

SOPHIE

PMMA

H: 10,4 mm

D: 150 mm

Beam type: Asymmetric



XP-G
XT-E
XP-E
XB-D
Oslo PC
Oslo S5L80
Oslo S5L150
Doris S5
NF2x75/7A
NCSxx19A
NVxx19A
NVxx19B
LX Rebel
LX Rebel ES
LX T
LX R

SOPHIE linear optic is an excellent choice for backlighting and shelf lighting applications. It's asymmetric beam provides uniform illumination when installed inside the shelf - making your goods look great.

XB-D
XP-E2
XP-G
XP-G2
LX A
LX Rebel
Oslo EC
NCSxx19A
HBS CO

EMMA

www.ledil.com/products



EMMA-A

PMMA

H: 5,7 mm

D: 9,9 x 9,9 mm

Beam type:

Side emitter

STRADA-S

www.ledil.com/products



STRADA-S

PMMA

H: 6,9 mm

D: 19,6 x 15,5 mm

Beam type:

Side emitter



STRADA-S-14

PMMA

H: 6,5 mm

D: 19,6 x 13,8 mm

Beam type:

Side emitter

LX A
LX Rebel
LX Rebel ES
LX Z ES
NCSxx19A
NVxx19A
HBS CO
Oslo EC
Oslo S5L150
Oslo S5L80
Double Dome
XB-D
XP-E
XP-G
Z5

MINNIE

www.ledil.com/minnie



MINNIE-LT-M

PC

H: 15,6 mm

D: 35 mm

Beam type:

Medium



MINNIE-LT-W


PC

H: 15,6 mm

D: 35 mm

Beam type:

Wide



CXA15
MC-E
MT-E
MT-G2
MK-R
LX M
LX M Z
NSMx286M
SSM-B0

Code	Typ. FWHM	Typ. eff.	Typ. cd/lm
MINNIE-M	24	72	2,6
MINNIE-W	33	76	2
MINNIE-WWW	69	91	0,9
MINNIE-XW	90	92	0,5
MINNIE-LT-M	21	92	2
MINNIE-LT-W	29	92	2

The information contained herein is the property of LEDiL Oy, Satorankatu 10, FI-24240 SALO, Finland, and is subject to change without prior notice. Please visit www.ledil.com for additional information, such as the latest photometric files, 3D mechanical models, and application notes relating to handling, gluing and taping.

BOOM

www.ledil.com/boom



BOOM-S

Metallized PC
H: ≈14 mm
D: 22,2 mm
Beam type: Spot



BOOM-M

Metallized PC
H: ≈14 mm
D: 22,2 mm
Beam type: Medium

MC-E
XRE
IX M
IX M2
AX3221
P7

Code	Typ. FWHM	Typ. cd/lm
BOOM-M	32	1,9
BOOM-S	18	3,6
BOOM-W	55	1,1
BOOM-XW	70	0,67



BOOM-XW

Hyper Reflective PC
H: ≈14 mm
D: 22,2 mm
Beam type: Extra² W

CXA15
NSBx1110
BXRA ES-3
CL-L233
CL-LD22
CL-L251

BRIDGET / LILY / CINDY

www.ledil.com/products

Mini Zenigata
SST-50
SST-90
Soleriq P6
Soleriq P9
LTPL-M036



-S

Metallized PC
H: 12,8 mm
D: 22,6 mm
Beam type: Spot



-M

Metallized PC
H: 12,8 mm
D: 22,6 mm
Beam type: Medium

Code	Typ. FWHM	Typ. eff.	Typ. cd/lm
-M	41	87	1,5
-S	31	89	1,5
-W	57	88	1,1
BRIDGET-S-UNI	44	85	1,0
BRIDGET-M-UNI	52	84	1,1
BRIDGET-W-UNI	61	87	1,0

BOOMERANG

www.ledil.com/boomerang

Ostar
LZ100xW00
LZ400xW00



BOOMERANG

Metallized PC
H: ≈14 mm
D: 22,2 mm
Beam type: Spot

TYRA / TYRA2 / TYRA3

www.ledil.com/tyra



TYRA-S

Metallized PC
H: 23,1 mm
D: 40 mm
Beam type: Spot

CL-L233
MP-L
NSBx1110

Code	Typ. FWHM	Typ. cd/lm
-M	32	90
-S	20	89
-W	47	91
-WW	64	90



TYRA3-WW


Metallized PC
H: 22,5 mm
D: 40 mm
Beam type: Extra wide

FWHM angles, efficiencies and cd/lm values contained herein are typical values. Actual measured values depend of the specific LED/optic combination. Go to www.ledil.com for LED specific values and optical datasheets.

Reflectors

BARBARA

www.ledil.com/barbara

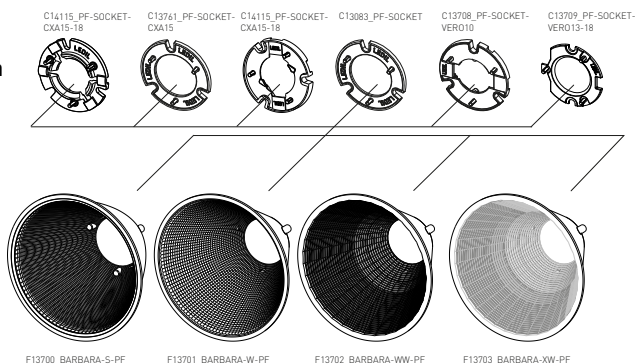

BXRA ES R
 Vero10
 Vero13
 Vero18
 CXA1816
 CXA2011
 CXA15
 COB-10W
 COB-13W
 COB-17W
 COB-24W
 CL-L330
 CLL03x
 NSBxL110
 NSBxL066A
 NSBxL121A
 NSCxJ216A
 S-SLE-P G3 LES17
 Soteriq P6
 Soteriq P9
 LTPL-M036

Code	LED	Typ. FWHM	Typ. eff.
BARBARA-S		17	90
BARBARA-S-PF		TBA	TBA
BARBARA-S-PF	CXA15	21	86
BARBARA-S-PF	VERO10	21	88
BARBARA-S-PF	VERO13/18	22	91
BARBARA-W-PF		TBA	TBA
BARBARA-W-PF	CXA15	24	85
BARBARA-W-PF	VERO10	29	78
BARBARA-W-PF	VERO13/18	45	92
BARBARA-WW-PF		TBA	TBA
BARBARA-WW-PF	CXA15	64	84
BARBARA-WW-PF	VERO10	68	77
BARBARA-WW-PF	VERO13/18	58	91
BARBARA-XW		75	90
BARBARA-XW-PF		74	91
BARBARA-XW-PF	VERO13/18	72	93



BARBARA-XW

Hyper Reflective PC
 H: 44,7 mm
 D: 70 mm
 Beam type: Extra² W



BARBARA-S

Metallized PC
 H: 44,7 mm
 D: 70 mm
 Beam type: Spot

RITA

www.ledil.com/rita



RITA-WAS-RZ

Hyper Reflective PC
 H: ≈17 mm
 D: 31,9 x 28,4 mm
 Beam type: Asymm.



RITA-A-RZ

Hyper Reflective PC
 H: ≈19 mm
 D: 35 x 29 mm
 Beam type: Asymm.



RITA-A

Hyper Reflective PC
 H: ≈17 mm
 D: 36 x 28,4 mm
 Beam type: Asymm.



RITA-WAS

Hyper Reflective PC
 H: ≈17 mm
 D: 31,9 x 28,4 mm
 Beam type: Asymm.

OsSa EC
 OsSsL150
 OsSsL80
 OsSa-SMT RGB
 LX-A
 LX-H50-2
 LX-M
 LX-M2
 LX-Rebel
 LX-Rebel ES
 LX-T
 LX-Z RGB
 XM-B
 XM-D
 XM-L
 XM-L-2
 XT-E
 XP-E
 XP-G
 XP-G2
 NS9x383
 NCsxx19A
 NVsxx19A
 NVsxx19B
 Z5

The information contained herein is the property of LEDiL Oy, Satorankatu 10, FI-24240 SALO, Finland, and is subject to change without prior notice. Please visit www.ledil.com for additional information, such as the latest photometric files, 3D mechanical models, and application notes relating to handling, gluing and taping.

BROOKE

www.ledil.com/brooke
**BROOKE-S**

Metallized PC
H: 20,1 mm
D: 45 mm
Beam type: Spot

**BROOKE-W**

Metallized PC
H: 21,1 mm
D: 45 mm
Beam type: Wide

BROOKE-SCR-M

Metallized PC
H: 20,2 mm
D: 45 mm
Beam type: Medium



BXRA ES R
BXRA ES S
Vero10
CL103X
CL1230
CL1330
CXA2011

Code	Typ. FWHM	Typ. eff.	Typ. cd/lm
BROOKE-S	24	94	
BROOKE-M	28	92	2,2
BROOKE-SCR-M	24	91	2,5
BROOKE-SCR-W	42	91	1,2
BROOKE-W	46	92	1,24
BROOKE-XW	TBA	TBA	TBA
BROOKE-SOCKET-VERO10	Socket to position and hold BRX Vero10		

VENLA

www.ledil.com/venla
VENLA-WW

Metallized PC
H: 25 mm, D: 45 mm
Beam type: Extra wide



LX M Z
LX S
SSM-80
XM-L
XM-L2

Code	Typ. FWHM	Typ. eff.
C11773 VENLA-S	13	TBA
C11775 VENLA-M	28	90
C11776 VENLA-W	45	TBA
C11777 VENLA-WW	56	87
CP12090 VENLA-S-IRIS	18	93

BRITNEY

www.ledil.com/britney
BRITNEY-XW

Hyper Reflective PC
H: 38,4 mm, D: 70 mm
Beam type: Extra² Wide
FWHM: 74°



BXRA RS

**BRITNEY-M**

Metallized PC
H: 38,4 mm
D: 70 mm
Beam type: Medium
FWHM: 28°

**BRITNEY-W**


Metallized PC
H: 38,4 mm
D: 70 mm
Beam type: Wide
FWHM: 48°

FWHM angles, efficiencies and cd/lm values contained herein are typical values. Actual measured values depend of the specific LED/optic combination. Go to www.ledil.com for LED specific values and optical datasheets.

MIRELLA

www.ledil.com/mirellafamily

- Manufactured from impact-resistant, UL 94 V-2 rated, polycarbonate
- Available with an optional clear, diffusing or mixing lens, molded from PMMA
- Optimized for use with larger single-die lighting class LEDs and COB array LEDs

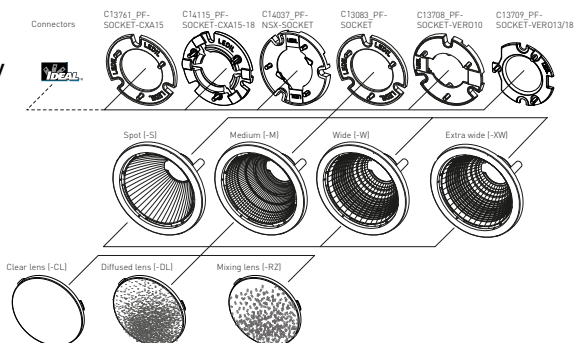

MIRELLA-50-S-PF

Metallized PC
H: 24 mm
D: 49,9 mm
Beam type: Spot



MIRELLA-50-M-PF

Metallized PC
H: 24,8 mm
D: 49,9 mm
Beam type: Medium



MIRELLA-50-W-DL-PF

Metallized PC / PC
H: 25,5 mm
D: 49,9 mm
Beam type: Wide



CN13905_MIRELLA-50-S-PF-RZL

Metallized PC / PC
H: 24,8 mm
D: 49,9 mm
Beam type: Spot

Code	Typ. FWHM	Typ. Eff.	Typ. cd/lm	Fastening
MIRELLA-50-M	27	90	2,8	glue
MIRELLA-50-M-CL				glue
MIRELLA-50-M-CL-PF	30	87	2,5	socket, screw
MIRELLA-50-M-DL	34	84	1,9	glue
MIRELLA-50-M-DL-PF	30	85	2,3	socket, screw
MIRELLA-50-M-PF	32	88	1,9	socket, screw
MIRELLA-50-M-PF-RZL	38	81	1,5	socket, screw
MIRELLA-50-M-PF-VERO10	28	85	2,2	socket, screw
MIRELLA-50-M-PF-VERO13/18	34	88	1,8	socket, screw
MIRELLA-50-M-PIN	23	86	3,2	pin
MIRELLA-50-M-PIN-CL	26	84	2,5	pin
MIRELLA-50-M-PIN-DL	34	80	1,6	pin
MIRELLA-50-M-PIN-RZL	34	83	1,6	pin
MIRELLA-50-M-RZL				glue
MIRELLA-50-S	15	92	8,5	glue
MIRELLA-50-S-CL-PF	16	84	6,0	socket, screw
MIRELLA-50-S-DL	20	85	4,9	glue
MIRELLA-50-S-DL-PF	17	84	4,3	socket, screw
MIRELLA-50-S-PF	17	88	5,4	socket, screw
MIRELLA-50-S-PF-RZL	22	82	3,1	socket, screw
MIRELLA-50-S-PF-VERO10	20	88		socket, screw
MIRELLA-50-S-PF-VERO13/18	25	89	2,5	socket, screw
MIRELLA-50-S-PIN	11	87	12,3	pin
MIRELLA-50-S-PIN-DL	15,3	82	5,5	pin
MIRELLA-50-S-PIN-RZL	18	83	3,4	pin
MIRELLA-50-S-RZL				glue
MIRELLA-50-W	41	90	1,6	glue
MIRELLA-50-W-CL	46	84	1,3	glue
MIRELLA-50-W-CL-PF	46	85	1,3	socket, screw
MIRELLA-50-W-DL	47	83	1,2	glue
MIRELLA-50-W-DL-PF	45	85	1,3	socket, screw
MIRELLA-50-W-PF	43	87	1,3	socket, screw
MIRELLA-50-W-PF-RZL	47	81	1,2	socket, screw
MIRELLA-50-W-PF-VERO10	41	85	1,5	socket, screw
MIRELLA-50-W-PF-VERO13/18				socket, screw
MIRELLA-50-W-PIN	33	86	1,6	pin
MIRELLA-50-W-PIN-CL	44	84	1,4	pin
MIRELLA-50-W-PIN-DL	47	81	1,2	pin
MIRELLA-50-W-PIN-RZL	48	81	1,1	pin
MIRELLA-50-W-RZL				glue
MIRELLA-50-XW	80	93	0,6	glue
MIRELLA-50-XW-PF	78	92	0,6	socket, screw
MIRELLA-50-XW-PF-VERO10	74	92	0,6	socket, screw

COB-4W
CXA1304
CXA15
CXA1816
MK-R
MT-G
MT-G2
XM-L
XM-L2
XM-L RGB
XP-G
XP-G2
XP-E
LTP-A036
NSBn1066A
NSBn121A
NSCJ216A
NSC1036A
NVsx19A
NS9-383
DuriS8
OxSn EC
Ostar L+
Ostar-SMT RGB
Solariq P6
Solariq P9
Solariq S13
BXR A ES S
BXR A L5
SM4
Vero10
Vero13
Vero18
CL101X
CL102X
Mini Zenigata
LX A
LX M
LX M2
LX S
LX CoB1203
LX K4
LX Z RGB
S-SLE-P G3 LESTO
CXM-6
CXM-7
CXM-9
ZC6


ANGELA /
ANGELINA

www.ledil.com/products

Code	Beam type	Diameter	Height	Typ. FWHM	Typ. Eff.	Typ. cd/lm
ANGELA-S	Spot	119,5	79,3	25	89	3,2
ANGELA-M	Medium	119,5	79,3	32	89	2,5
ANGELA-W	Wide	119,5	74,5	46	89	1,4
ANGELA-XW	Wide	119,5	74,5	TBA	TBA	TBA
ANGELA-XW-B	Wide	119,5	74,5	36	93	2,1

ANGELINA-S	Spot	82	31	39	90	1,2
ANGELINA-M	Medium	82	31	32	92	1,6
ANGELINA-W	Wide	82	31	47	92	1,1
ANGELINA-RZ-S	Spot	82	31	31	88	1,4
ANGELINA-RZ-M	Medium	82	31	TBA	TBA	TBA
ANGELINA-RZ-W	Wide	82	31	TBA	TBA	TBA
ANGELINA-XW	Wide	82	31	91	93	0,46
ANGELINA-XW-B	Wide	82	31	91	94	0,53
ANGELINA-M-B	Medium	82	31	39	91	1,3
ANGELINA-W-B	Wide	82	31	51	91	1,0

COB-10W
 COB-13W
 COB-17W
 COB-24W
 BXR A ES R
 Vero13
 Vero18
 Vero29
 CXA15
 CXA1520
 CXA1816
 CXA25
 CXA30
 CXA35
 PRL C AC (LEP2000)
 PRL C AC (LEP800)
 PRL C Z3 LES19
 PRL C Z3 LES23
 PRL C Z3 LES9
 PRL C Z4 LES19
 Soteriq E30
 Soteriq S13
 Soteriq S19
 Mega Zenigata
 Tiger Zenigata
 CLL02x
 CLL03x
 CLL04x
 F-SLM 2000 G3
 F-SLM 3000 G3
 F-SLM 4500 G3
 LX CoB1208
 LX CoB1204/1205
 LX K12
 LX K16
 LX S2000
 LX S3000
 LX S5000
 NSBx121A
 NSCJ216A
 LC026B/LC040B
 CXM-14
 LTHL-M074
 S-SLE G2 LES19
 S-SLE G2 LES23
 S-SLE G2 LES26
 S-SLE G3 LES19
 S-SLE G3 LES23
 WU-M-461
 WU-M-462
 WU-M-464
 WU-M-484
 WU-M-485
 WU-M-486
 ZC25/40

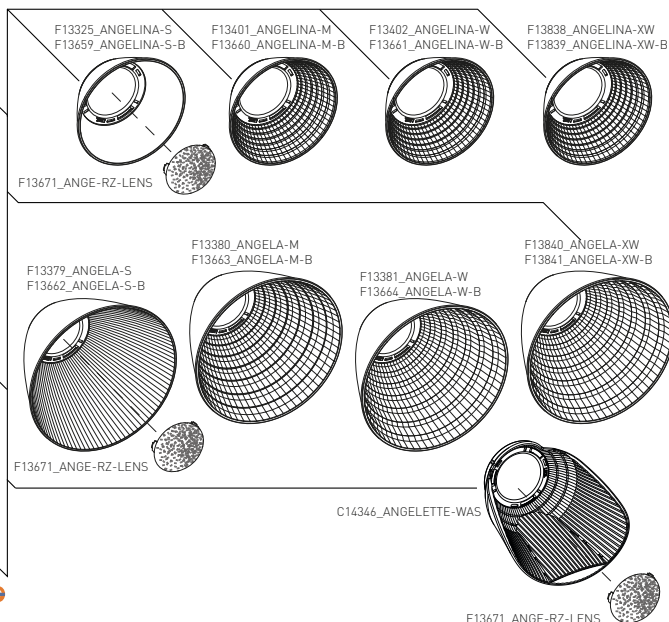SOLDERLESS
CONNECTORS:LEDiL
Clamps:Cree
CXA15 & 18
C14123_CLAMP-CXA15-18Cree
CXA25 & 30
C14036_CLAMP-CXA25-30Bridgelux
Vero13 & 18
C13658_CLAMP-VERO13-18Bridgelux
Vero29
C13584_CLAMP-VERO29Philips Lumileds
LUXEON Sxxxx
C13397_CLAMP-S3000
C13399_CLAMP-S5000ZHAGA Book3
SLM MODULES:

FWHM angles, efficiencies and cd/lm values contained herein are typical values. Actual measured values depend of the specific LED/optic combination. Go to www.ledil.com for LED specific values and optical datasheets.

ANGELETTE-WAS

www.ledil.com/products

ANGELETTE-WAS a wall-washer that uniquely utilizes the efficiency of COB's in wall washing, providing a heretofore unseen uniformity and light pattern quality.


ANGELETTE-WAS

H: 84 mm
D: 97,2 x 83,4 mm
Efficiency: 92%
Beam type: Asymm.

NEW!




CXA1830
CXA25
LX S2000
LX S3000
LX S5000
Vero13
Vero18
Vero29

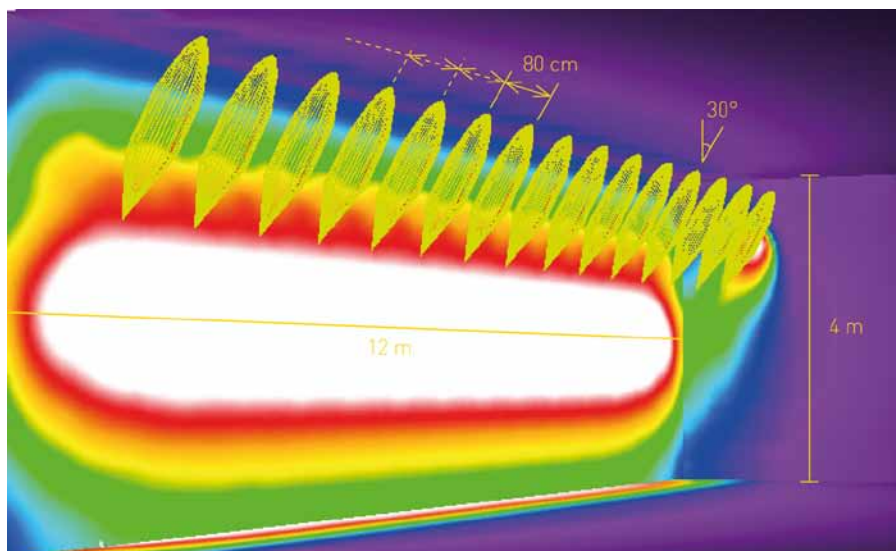

TYPICAL APPLICATION OF ANGELETTE-WAS

- Ceiling height 4 m, wall width 12m, 15 luminaires installed on a track suspended 20 cm lower
- Track installed 1.5 m distance from the wall
- Distance between luminaires 80 cm
- Luminaire flux with each luminaire 4000 lm
Eav: 755 lx, Emax: 1340 lx, U0: 0.1614

One system,
endless possibilities

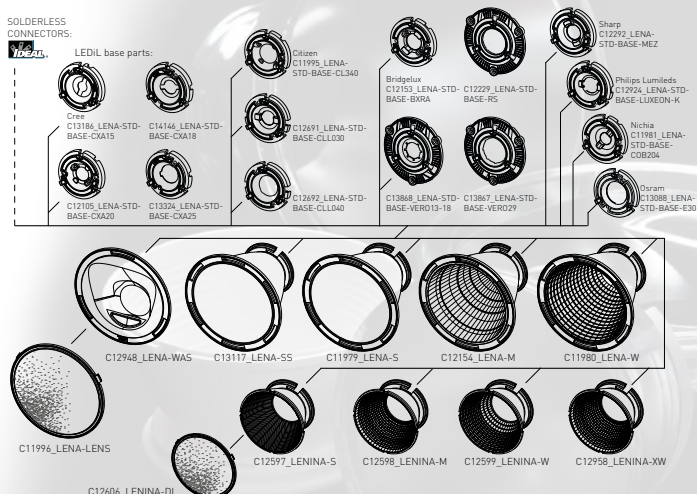

CXA15
CXA1520
CXA1816
CXA2011
CXA25
NSCJ216A
NSBxLT10
NSBxLT21A
COB204
Soleriq E30
BXRA ES R
BXRA RS
V10
Vero13
Vero18
Vero29
CLL340
CLL03X
CLL04x
LX K12
LX K16
LX CoB 1204/1205
LX CoB 1208
Mega Zenigata
ZC12/18
ZC25/40
LTL-M036
S-STEP G3 TEST

LENA

www.ledil.com/lenafamily

Code	Beam type	Diameter	Height	Typ. FWHM	Typ. Eff.	Typ. cd/lm
LENA-M	M	111	86	22	83	2,5
LENA-M-DL	M	111	87	22	77	3,4
LENA-S	S	111	86	11	85	7,6
LENA-S-DL	S	111	87	14	80	5,6
LENA-SS	SS	111	86	18	82	5
LENA-SS-DL	SS	111	87	16	74	5
LENA-W	W	111	86	46	82	1,3
LENA-WAS	WAS	111	37	Asym	82	1,1
LENA-WAS-DL	WAS	111	41,2	Asym	76	0,86
LENA-W-DL	W	111	87	45	75	1,3
LENA-X-WAS	WAS	111	37	Asym	87	
LENA-X-WAS-DL	WAS	111	42	Asym	80	

LENINA

www.ledil.com/leninafamily

Code	Beam type	Diameter	Height	Typ. FWHM	Typ. Eff.	Typ. cd/lm
LENINA-M	M	74	46	31	87	2.1
LENINA-M-DL	M	74	48	35	80	1.6
LENINA-S	S	74	46	19	88	4.5
LENINA-S-DL	S	74	48	23	81	3.1
LENINA-W	W	74	46	53	87	1.1
LENINA-W-DL	W	74	48	54	80	1
LENINA-XW	XW	74	46	73	89	0.6
LENINA-XW-DL	WWW	74	48	68	82	0.6

FWHM angles, efficiencies and cd/lm values contained herein are typical values. Actual measured values depend of the specific LED/optic combination. Go to www.ledil.com for LED specific values and optical datasheets.

Multi-lens arrays

SATU

www.ledil.com/satu



SATU-M

3 LEDs
PMMA
H: 8,9 mm
D: 21,8 mm
Beam type: Medium

Code	Typ. FWHM	Typ. eff.	Typ. cd/lm
SATU-M	27	91	2,9
SATU-O	42 x 22	86	2,5
SATU-S	19	90	4,9
SATU-W	33	86	1,9



SATU-O

3 LEDs, PMMA
H: 8,9 mm, D: 21,8 mm
Beam type: Oval

H35C0
H35B0
XP-G XB-D
XP-G2
XT-E
XP-E XP-E2
OsLSL150
OsLSL80
OsLSq EC
NCsxx19A
NF2x757A
NVsxx19A
NVsxx19B
LXA LX-T
LX Rebel
LX Rebel ES
LX H50-2
Double Dome
Z5

CUTE

www.ledil.com/cute

Code	Beam type	LEDs	Diameter	Height	Typ. FWHM	Typ. eff.	Typ. cd/lm
CUTE-3-M	M	3	35	15	24	88	3,8
CUTE-3-S	S	3	35	15	11		
CUTE-3-SS	SS	3	35	15	12	90	11,3
CUTE-3-W	W	3	35	15	39	83	1,6
CUTE-3-WW	WW	3	35	15	TBA	TBA	TBA
CUTE-4-M	M	4	35	15	22	84	4,26
CUTE-4-SS	SS	4	35	15	11	88	13,2
CUTE-4-W	W	4	35	15	38		



MX-3 MX-6
XWL XM-L2
XM-L HWV
XP-E XT-E
XR-E XP-L
XP-G XP-G2
XT-E HWV
Z5 Z5-M1
OsLSq EC Pbr
OsLSL150
OsLSL80
NCsxx19A
NCsxx19B
NVsxx19A
NVsxx19B
NS3x83 NS5x83
Cer 3535 H35C1
LXA LX-T
LX Rebel
LX Rebel ES
LX H50-2
Double Dome

GT3

www.ledil.com/gt3

Name	Beam type	Diameter	Height	Typ. FWHM	Typ. eff.	Typ. cd/lm
GT3-M	M	35	9	30	89	2,2
GT3-S	S	35	9	18	90	4,5
GT3-W	W	35	9	40	88	1,6
GT3-WW	WW	35	9	47	90	1,1



GT3-M

3 LEDs
PMMA
H: 9 mm
D: 35 mm
Beam type: Medium



GT3-WW

3 LEDs
PMMA
H: 9 mm
D: 35 mm
Beam type: Extra wide

LXA
LX Rebel
LX Rebel ES
LX-T
OsLSq EC
OsLSL150
OsLSL80
XB-D
XP-E
XP-G
NCsxx19A
NVsxx19A
Double Dome
Z5

GT4

www.ledil.com/gt4

Name	Beam	Diameter	Height	Typ. FWHM	Typ. Eff.	Typ. cd/lm
GT4-M	M	35	9	28	88	2,5
GT4-S	S	35	9	21	90	3,3
GT4-W	W	35	9	38	89	1,7
GT4-WW	WW	35	9	53	90	1,1



LXA
LX Rebel
LX Rebel ES
LX-T
OsLSL150
OsLSL80
XB-D
XP-E
XP-G
NCsxx19A
NVsxx19A
Double Dome
Z5

The information contained herein is the property of LEDiL Oy, Satorankatu 10, FI-24240 SALO, Finland, and is subject to change without prior notice. Please visit www.ledil.com for additional information, such as the latest photometric files, 3D mechanical models, and application notes relating to handling, gluing and taping.

ANNA

www.ledil.com/anna

One of LEDiL's largest lens array family and most popular product families. ANNA family is versatile with optics in two diameters, wide selection of beam angles and sources.

ANNA-50-5-S



Cer 3535
H35C0
Os4sq EC
Os4sq PC
Ostar L+
Ostar-SMT RGB
SFH 4715S (IR)
Os4 S5L150
Os4 S5L180
Duo455
ML-E
XB-D
XM-L
XM-L2
XP-E
XP-E2
XP-G
XP-G2
XT-E
LX-A
LX Rebel
LX Rebel E5
LX R
LX T
LX PWT
Double Dome
107
NCsxx19A
NF2x757A
NS5W157T
NS9x153
NS9x383
NVsxx19A
LH351A(3535)
SM4
Z5
Z5 M

Name	Beam type	LED sources	D	H	Typ. FWHM	Typ. efficiency	Typ. cd/lm
ANNA-40-3-M	M	3	40	10,7	22	88	3,7
ANNA-40-4-M		4					
ANNA-40-5-M		5					
ANNA-40-6-M		6					
ANNA-40-7-M		7	50				
ANNA-50-3-M		3					
ANNA-50-4-M		4					
ANNA-50-5-M		5					
ANNA-50-6-M		6					
ANNA-50-7-M		7					
ANNA-40-7-M2	M	7	40	10,7	25	87	3,2
ANNA-40-3-S	S	3	40	10,7	15	91	8,5
ANNA-40-4-S		4					
ANNA-40-5-S		5					
ANNA-40-6-S		6					
ANNA-40-7-S		7	50				
ANNA-50-3-S		3					
ANNA-50-4-S		4					
ANNA-50-5-S		5					
ANNA-50-6-S		6					
ANNA-50-7-S		7					
ANNA-40-7-S-PC	S	7	40	10,7	15	85	TBA
ANNA-40-3-W	W	3	40	10,7	32	86	1,9
ANNA-40-4-W		4					
ANNA-40-5-W		5					
ANNA-40-6-W		6					
ANNA-40-7-W		7	50				
ANNA-50-3-W		3					
ANNA-50-4-W		4					
ANNA-50-5-W		5					
ANNA-50-6-W		6					
ANNA-50-7-W		7					
ANNA-40-7-WW	WW	6	40	12,5	64	90	0,9



ANNA-50-3-S

D: 50 mm
3 LEDs
PMMA
Beam type: Spot



ANNA-40-4-S

D: 40 mm
4 LEDs
PMMA
Beam type: Spot



ANNA-40-3-M

D: 40 mm
3 LEDs
PMMA
Beam type: Medium

FWHM angles, efficiencies and cd/lm values contained herein are typical values. Actual measured values depend of the specific LED/ optic combination. Go to www.ledil.com for LED specific values and optical datasheets.

Multi-lens arrays

ANGIE

www.ledil.com/angie

ANGIE-S

D: 34 mm
H: 10,7 mm
4 LEDs
PMMA
Beam type: Spot

Name	Beam type	Typ. FWHM	Typ. eff.	Typ. cd/lm
ANGIE-S	S	12	93	11,8
ANGIE-M	M	19	89	6,2
ANGIE-M2	M2	26	88	3,3
ANGIE-W	W	29	84	2,4



XP-E
XP-G
LX H50-2
LX T
LX Rebel
LX Rebel ES
Os SSI80
Os SSI150
Os SSI EC
ZS

TAMPA

www.ledil.com/tampa

NIS83-MX-7-M

D: 38 mm
7 LEDs
PMMA
Beam type: Medium

Name	Beam type	Height	Typ. FWHM	Typ. eff.
NIS83-MX-7-M	M	11,4	20	90
NIS83-MX-7-MD	MD	11,4	22	91
NIS83-MX-7-W	W	11,4	37	89
NIS83-MX-7-WW	WW	11,4	57	87
RER-7-MD	MD	10,6	33	85
RER-7-S	S	10,6	19	89
RER-7-W	W	10,6	41	82
RER-7-WW	WW	10,6	53	90



MX-6
LX A
LX Rebel
LX Rebel ES
NIS3x83
NIS6x83
OLP-x5050F6L

PENTA

www.ledil.com/penta



PENTA-5-M

D: 35,5 mm
5 LEDs
PMMA
Beam type: Medium

Name	Beam type	LEDs	Height	FWHM
NIS83-MX-5-W	W	5	6,8	36
PENTA-5-M	M	5	7,2	30
RER-5-M	M	5	6,8	28



NIS83-MX-5-W

D: 35,5 mm, 5 LEDs, PMMA
Beam type: Wide

Double Dome
GDr+
LX Rebel
MX-6
XP-E
XP-G
NIS3x83
NIS6x83
ZS

QUAK

www.ledil.com/quak

NIS83-MX-4-M

D: 50 mm
4 LEDs
PMMA
Beam type: Medium

Name	Beam	FWHM
NIS83-MX-4-SS	SS	15
NIS83-MX-4-M	M	21
NIS83-MX-4-W	W	49



MX-6
NIS3x83
NIS6x83

MELODY

www.ledil.com/melody

MELODY-3-M

D: 50,6 mm

H: 11,9 mm

3 LEDs

PMMA

Beam type: Medium

Name	Beam type	LEDs	Typ. FWHM	Typ. eff.	Typ. cd/ lm
MELODY-4-M	M	4	29	89	2,8
MELODY-3-M	M	3	34	92	2,1
MELODY-4-S	S	4	12	89	14,8



XP-E XP-E2
XP-G XP-G2
XT-E XB-D
LX A
LX R
LX H50-2
LX T
LX Rebel
LX Rebel ES
LX Z ES
NCsxx19A
NCsxx19B
NVsxx19A
NVsxx19B
Os S5L180
Os S5L150
Os S5L150
Os S5L EC
Double Dome
Z5 Z5 M

DOLLY

www.ledil.com/dolly

Name	Beam type	LEDs	D	H	FWHM
APOLLO-3-S	S	3	50	19,4	10
LAIKA-3-S	S	3	50	20,4	10
TITANUM-3-S	S	3	50	18,4	15
TITANUM-3-M	M	3	50	19,9	30
LAIKA-3-M	M	3	50	20,4	28



GD+
LX K2
P4

TUIJA

www.ledil.com/tuija

Name	Beam type	LEDs	D	H	Typ. FWHM	Typ. Efficiency	Typ. cd/lm
TUIJA-3-M	M	3	50	14,5	16	84	5,6
TUIJA-3-M2	M	3	50	14,5	35	87	2
TUIJA-3-SS	SS	3	50	14,5	12	90	12,9
TUIJA-3-W	W	3	50	14,5	53	86	0,9



XB-D
XP-E
XP-G
XT-E
LX A
LX Rebel
LX Rebel ES
Os S5L180
Os S5L150
Os S5L150
NCsxx19A
NVsxx19A
Double Dome
Z5

MARTHA

www.ledil.com/martha

PLATINUMROCKET-3-SS

D: 50 mm

3 LEDs

PMMA

Beam type: Smooth spot

Name	Beam type	LEDs	D	Typ. H	Typ. FWHM
APOLLO-LAIKA-3-W	W	3	50	17	49
NIS83-MX-3-W	W	3	50	15	48
PLATINUMROCKET-3-W	w	3	50	16	43
PLATINUMROCKET-3-SS	ss	3	50	16	14
PLATINUMROCKET-3-M	M	3	50	16	20
NIS83-MX-3-M	M	3	50	16	22



GD+
LX K2
MX-6
XR-E
NISxx83
P4

FWHM angles, efficiencies and cd/lm values contained herein are typical values. Actual measured values depend of the specific LED/ optic combination. Go to www.ledil.com for LED specific values and optical datasheets.

Multi-lens arrays

SANDRA

www.ledil.com/sandra

SANDRA is the largest diameter optical array family LEDiL has. It has suited for many applications like for example in retrofits, retail lighting and track mounted lighting fixtures.



SANDRA-M

D: 67 mm
H: 11,1 mm
12 LEDs
PMMA
Beam type: Medium



SANDRA-S

D: 67 mm
H: 11,1 mm
12 LEDs
PMMA
Beam type: Spot

Name	Beam type	Typ. FWHM	Typ. eff.	Typ. cd/lm
SANDRA-12-M	M	28	88	2,4
SANDRA-12-W	W	31	88	2,4
SANDRA-12-S	S	14	91	13,2
SANDRA-12-O	O	45+20	90	TBA

NEW!



SANDRA-O

D: 67 mm
H: 11,1 mm
12 LEDs
PMMA
Beam type: Oval

XP-E
XP-E2
XP-G
XP-G2
XT-E
OdiSSL150
OdiSSL80
OdiSSL60
LX Rebel
LX Rebel ES
Double Dome
NV5xx19A
NF2x757A
NV5xx19A
Z5

VIRPI

www.ledil.com/virpifamily



VIRPI-M

D: 74,9 x 74,9 mm
H: 9,4 mm
25 LEDs
PMMA
Beam type: Medium
Typical FWHM: 29°
Typical cd/lm: 2,7



VIRPI-S

D: 74,9 x 74,9 mm
H: 9,4 mm
25 LEDs
PMMA
Beam type: Spot
Typical FWHM: 15°
Typical cd/lm: 7,5



VIRPI-W

D: 74,9 x 74,9 mm
H: 9,4 mm
25 LEDs
PMMA
Beam type: Wide
Typical FWHM: 42°
Typical cd/lm: 1,6

EMY

www.ledil.com/emy



EMY-S

D: 50 mm
H: 14,4 mm
6 LEDs
PMMA
Beam type: Smooth spot

MX-G
NV5xx83
NV5xx19A

PETUNIA

www.ledil.com/petunifamily



PETUNIA

D: 29,5 x 46,5 mm H: 7,4 mm
12 LEDs PMMA
Typ. FWHM: 29°, Typ. eff: 91%

SOLUTION FOR PLANT LIGHTING

- A special lens for deep red, deep blue and white OSRAM OSLOX LEDs
- Smooth mixing of colours at a short distance resulting in a uniform growing light for plants
- PCB available with the right spread of colours
- Control algorithm for switching on / off white and coloured LEDs



OdiSSL150
XB-D
XP-E
XP-G
XT-E
NV5xx19A

FLORENCE

www.ledil.com/florence



FLORENCE-Z60

D: 286 x 61 mm
H: 8.5 mm
33 LEDs
PMMA

Name	Beam type	Typ. FWHM	Typ. eff.	Typ. cd/lm
FLORENCE-Z30	M	TBA	TBA	TBA
FLORENCE-Z60	W	58	88	0,8
FLORENCE-Z90	WWW	92	86	0,4
FLORENCE-ZT25	Asymmetric	TBA	94	0,6

FLORENCE-ZT25

D: 286 x 61 mm
H: 11 mm
33 LEDs
PMMA



XH-B/G
XP-G
Duris E5
Duris P5
Duris S5
NF2x757D
LG5630
LG6030
LM231 A/B
LM362A
LM561B
5630
LX3535

FLORENCE-1R

www.ledil.com/products



FLORENCE-1R-ZT25

D: 19,5 x 286 mm
H: 7,1 mm
PMMA

FLORENCE-1R-CLIP-A

D: 63,5 x 9 mm
H: 8,4 mm
PC



Installation on a plate



FLORENCE-1R-Z90

D: 19,5 x 286 mm
H: 7 mm
PMMA

FLORENCE-1R-CLIP-B

PC



Profile installation

LG5630
NC5xx19B
NF2x757A
XB-H
XP-E
XP-E2
XP-G
XO-E
LX Rebel ES
LXT

Name	Beam type	Typ. FWHM	Typ. eff.	Typ. cd/lm
FLORENCE-1R-Z90	WWW	90 + 110	94	0,4
FLORENCE-1R-Z60	M	TBA	TBA	TBA
FLORENCE-1R-ZT25	Asymmetric	TBA	86	TBA
FLORENCE-1R-O	Oval	TBA	TBA	TBA
FLORENCE-1R-MAXI-WG	Asymmetric	TBA	90	TBA
FLORENCE-1R-CLIP-A	Clip for installation on a plate			
FLORENCE-1R-CLIP-B	Clip for installation on a profile			

FWHM angles, efficiencies and cd/lm values contained herein are typical values. Actual measured values depend of the specific LED/optic combination. Go to www.ledil.com for LED specific values and optical datasheets.

Multi-lens arrays

SHELLY

www.ledil.com/shelly



SHELLY-T-6X1-WAS

D: 119,8 x 19,6 mm
H: 7,6 mm
6 LEDs
PMMA

SHELLY-T-6X1-N

D: 119,8 x 19,6 mm
H: 7 mm
6 LEDs
PMMA



Name	Beam type	Typ. eff.	Typ. cd/lm
SHELLY-N	Asymmetric	94	0,5
SHELLY-WAS	Asymmetric	94	1,0

Duris55
LX Rebel
LX Rebel ES
LX T
LX Z ES
NC5xx19A
NC5xx19B
NF2x757A
NF2x757D
NV5xx19A
NV5xx19B
XB-D
XC-D
XC-E

ZENIA

www.ledil.com/products

ZENIA optics are designed to illuminate the backdrop inside the shelves. Also suited for wall-washing and stair lighting applications. Linear optics that work with any distance between the mid-power LEDs. Modular breakable design at 15 mm intervals allows installation to any width. Designed to be installed as such or into an aluminium profile.

ZENIA

D: 16,2 x 119,8 mm
H: 5,97 mm
PMMA



Duris E5

VANESSA

www.ledil.com/vanessafamily

Name	Beam type	Typ. FWHM	Typ. eff.
VANESSA-M	Medium	26	89
VANESSA-O	Oval	42+19°	82
VANESSA-S	Spot	17	90
VANESSA-B-O	Oval	45+21°	88
VANESSA-B-S	Spot	22	93
VANESSA-B-W	Wide	37	92



LG5630
LX A
LX Rebel ES
XP-E
XP-G
XP-G2
XT-E
NF2x757A
OsSg EC

The information contained herein is the property of LEDiL Oy, Satorankatu 10, FI-24240 SALO, Finland, and is subject to change without prior notice. Please visit www.ledil.com for additional information, such as the latest photometric files, 3D mechanical models, and application notes relating to handling, gluing and taping.

ZOWIE

www.ledil.com/zowie

Spot or Wide – Take Both

Three revolutionary products featuring efficient zoom from spot to wide beams. Ideal choice for applications that benefit from adjustability and a compact optical system.


LX A
LX M
LX Rebel ES
LX S
LX Z RGB
MT-G2
XB-D
XM-L
XP-E
XP-G
XP-G2
XT-E
OsSq EC
Ostar-SMT RGB
NVsxx19A
NVsxx19B
LZ4(100xW00)

**ZOWIE-MINI**

D: 14,8 mm
PMMA
Beam type: Zoom
Available with
optional multi-holder

ZOWIE-MIDI-RZ

D: 35 mm
PMMA
Beam type: Zoom

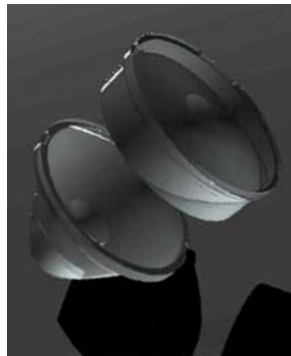


Name	Diameter	Beam type	Typ. FWHM
ZOWIE-MAXI	65	Zoom	TBA
ZOWIE-MIDI-RZ	35	Zoom	TBA
ZOWIE-MINI	14,8	Zoom	24-60

TATIANA

www.ledil.com/tatiana

- Designed especially to meet Russian street lighting standards.
- Module can be snapped into four single lenses which enable upgrading old lighting fixtures and gives more freedom when designing the fixture.
- Designed for lighting fixtures with 15° mounting angle.
- Suitable also for wire-mounted catenary luminaires.



DESIGN EXAMPLE

Luminous flux (Luminaire): 9404 lm
Luminous flux (Lamps): 9800 lm
Luminaire Wattage: 90 W
Arrangement: Double row, opposing
Pole Distance: 40 m
Mounting Height: 12 m
Height: 12 m
Overhang: 0.853 m
Boom Length: 1.5 m

Maximum luminous intensities
at 70°: 447 cd/klm
at 80°: 36 cd/klm
at 90°: 11 cd/klm

**TATIANA-1X4-B**

D: 102x25 mm
H: 7,7 mm
Typ. FWHM: °
Typ. eff: 94%
PMMA
LEDs: 4

NVsxx19A
OsSq EC
XM-L2
XP-G2
XT-E

High Bay

www.ledil.com/
highbayfamily

Name	LEDs	Diameter	Height	Typ. FWHM
STRADA-2X2-CY	4	50x50	7.8	127+127
HB-2X2-RS	4	50x50	10	10
HB-2X2-M	4	50x50	8,5	25
HB-2X2-O	4	50x50	10,6	TBA
HB-2X2-RW	4	50x50	8,5	51
HB-2X2-W	4	50x50	8,5	51
HB-2X2-WW	4	50x50	8,5	65
HB-5X1-FLAT-W	5	123 x 25	8,5	54
HB-5X1-W	5	123 x 25	9	56
HB-5X1-WW	5	123 x 25	9	TBA
HB-IP-2X6-W	12	173 x 71.4	11,4	58
HB-IP-2X6-WWW	12	173 x 71.4	11,4	98
HB-SQ-A	1	25 x 25	12,9	50




STRADA-2X2-CY

D: 50x50 mm
H: 7.8 mm
PMMA
Typ. eff: 94%



HB-2X2-O

D: 50 x 50 mm
H: 10,6 mm
PMMA
Typ. eff: 94%
LEDs: 4
Oval beam type suitable for warehouse aisle lighting



HB-2X2-O DESIGN EXAMPLE

- Luminaire installation height: 14 m
- Installed in the aisle centerline
- Fixture luminous flux 6200 lm
- LED luminous flux 7000 lm

HB-IP-2X6-W

D: 173 x 71,4 mm
H: 11,4 mm
Typ. FWHM: 58°
Typ. eff: 94%
PMMA
LEDs: 12



HB-5X1-FLAT-W

D: 123 x 25 mm
H: 8,5 mm
PMMA
Typ. FWHM: 54°
Typ. eff: 91%
LEDs: 5



HB-2X2-RW

D: 50x50 mm
H: 8,5 mm
PMMA
Typ. FWHM: 51°
Typ. eff: 89%
LEDs: 4



HB-SQ-A

D: 25 x 25 mm
H: 12,9 mm
PMMA
Typ. FWHM: 54°
Typ. eff: 86%



[MK-R](#)
[XB-D](#)
[XM-L](#)
[XM-L2](#)
[XP-E](#)
[XP-E2](#)
[XP-E-HEW](#)
[XP-G2](#)
[XP-G](#)
[XP-L](#)
[XP-E](#)
[MX-E](#)
[MX-E2](#)
[XM-L-E2W](#)
[XQ-E](#)
[O1 Rn EC](#)
[O1 Rn PC](#)
[O1 SS180](#)
[O1 SS1150](#)
[LX-A](#)
[LX-M](#)
[LX-M2](#)
[LX-Q](#)
[LX Rebel](#)
[LX Rebel ES](#)
[LX-R](#)
[LX-T](#)
[LX H50-2](#)
[LX Z ES](#)
[NC5x19A](#)
[NC5x19B](#)
[NF2x257A](#)
[NS5x33](#)
[NS5x33B](#)
[NS5x19A](#)
[NS5x19B](#)
[Double Dome](#)
[IH351A\(3535\)](#)
[O1 P-5065f6-506A](#)
[MJT4040](#)
[Z5 M1](#)
[Z5](#)
[H35C1](#)

STRADA

www.ledil.com/strada


STRADA lenses, originally designed for street lighting applications, are suitable for many other applications as well.

Like all LEDiL products STRADA lenses are optimized for specific LED types and have optimal light distribution and over 90% optical efficiency. Some STRADA lenses can also be used with other LED types with a small sacrifice in light distribution and optical efficiency. STRADA lenses designated for roadway lighting have batwing light distribution for better performance.


Symmetric STRADA lenses were the first lenses from LEDiL designed especially for street lighting applications. On street lighting setups, symmetrical light distribution requires a mounting boom and tilt in the lamp head. This makes symmetrical STRADA lenses ideal for traditional street light replacement.




Single optics

**STRADA-A**


D: 19,6 x 15,4 mm
H: 10,8 mm
PMMA
Typ. FWHM: 80° x 146°
Typ. eff: 92%

**STRADA-C2**


D: 19,6 x 15,6 mm
H: 6,4 mm
PMMA
Typ. FWHM: 120°
Typ. eff: 92%

**STRADA-B**


D: 19,6 x 15,5 mm
H: 6 mm
PMMA
Typ. FWHM: 105° x 44°
Typ. eff: 93%

**STRADA-A2**


D: 19,6 x 15,4 mm
H: 10,6 mm
PMMA
Typ. FWHM: 72° x 141°
Typ. eff: 92%

**STRADA-B2**


D: 19,6 x 15,5 mm
H: 5,3 mm
PMMA
Typ. FWHM: 111° x 47°
Typ. eff: 92%

**STRADA-C**


D: 19,6 x 15,6 mm
H: 5,3 mm
PMMA
Typ. FWHM: 125°
Typ. eff: 92%

**STRADA-C2-CLIP**

D: 19,6 x 15,6 mm
H: 6,9 mm
PMMA
Typ. eff: 92%

**STRADA-DN**


D: 19,6 x 15,7 mm
H: 5,9 mm
PMMA
Typ. FWHM: 107° x 58°
Typ. eff: 92%

**STRADA-DW**

D: 19,6 x 15,6 mm
H: 9,6 mm
PMMA
Typ. FWHM: 89° x 142°
Typ. eff: 92%


FWHM angles, efficiencies and cd/lm values contained herein are typical values. Actual measured values depend of the specific LED/optic combination. Go to www.ledil.com for LED specific values and optical datasheets.

Street lighting




STRADA-FT

D: 19,6 x 15,4 mm
H: 8,3 mm
PMMA
Typ. eff: 91%




STRADA-FW

D: 19,6 x 15,5 mm
H: 10,9 mm
PMMA
Typ. eff: 92%



STRADA-S

D: 19,6 x 15,5 mm
H: 6,9 mm
PMMA
Typ. FWHM: 149° x 159°
Typ. eff: 93%




STRADA-T-DW-EP

D: 19,8 x 15,5 mm
H: 10,7 mm
PMMA
Typ. eff: 92%




STRADA-SQ-T-DW-90

D: 25 x 25 mm, H: 11,4 mm
Typ. eff: 91%




STRADA-SQ-T2

D: 25 x 25 mm
H: 8,5 mm
PMMA
Typ. eff: 90%




STRADA-S-14

D: 19,6 x 15,5 mm
H: 6,9 mm
PMMA
Typ. FWHM: 149° x 159°
Typ. eff: 93%




STRADA-K

D: 19,6 x 15,5 mm
H: 8,7 mm
PMMA
Typ. eff: 96%




STRADA-SQ-T3

D: 25 x 25 mm
H: 8,5 mm
PMMA
Typ. eff: 90%




STRADA-SQ-CY

D: 25x25 mm
H: 10,1 mm
PMMA
Typ. eff: 94%




STRADA-SQ-A-T

D: 25 x 25 mm
H: 9,1 mm
PMMA
Typ. eff: 93%




STRADA-SQ-FS

D: 25 x 25 mm
H: 12,3 mm
PMMA
Typ. eff: 93%




STRADA-SQ-FS2

D: 25 x 25 mm
H: 8,2 mm
PMMA
Typ. eff: 90%




STRADA-SQ-T-DN

D: 25 x 25 mm
H: 8,5 mm
PMMA
Typ. eff: 90%




STRADA-SQ-T-DW

D: 25 x 25 mm
H: 11,4 mm
PMMA
Typ. eff: 91%




STRADA-SQ-T-DWC

D: 25 x 25 mm
H: 9,1 mm
PMMA
Typ. eff: 93%




STRADA-SQ-VSM

D: 25 x 25 mm
H: 6,9 mm, PMMA
Typ. FWHM: 152°
Typ. eff: 93%




STRADA-T-DN

D: 19,8 x 15,5 mm
H: 8,9 mm
PMMA
Typ. eff: 92%



STRADA-T-DN-EP

D: 19,8 x 15,5 mm
H: 8,8 mm
PMMA
Typ. eff: 91%




STRADA-T-DW

D: 19,8 x 15,5 mm
H: 10,8 mm
PMMA
Typ. eff: 93%


Name	Diameter	Height	Typ. eff.	Typ. FWHM
STRADA-SQ-FS-NP	25x25	12,4	TBA	TBA
STRADA-SQ-ME	25x25	8,6	TBA	TBA
STRADA-SQ-FT	25x25	12,5	TBA	TBA
STRADA-SQ-ME-NP	25x25	8,6	TBA	TBA
STRADA-SQ-T4	25x25	9,4	TBA	TBA
STRADA-SQ-FW	25x25	15,3	TBA	TBA
STRADA-SQ-T4-NP	25x25	9,4	TBA	TBA
STRADA-C2-NP	19,6 x 15,5	6,9	92,0	111

Stanley3J
Stanley6J
CL-L400
LH351A(3535)
LH351B
NCsx19A
NCsx19B
NS3x33
NS6x33
NS9x33
NVsx19A
NVsx19B
Double Dome
LX A
LX H50-2
LX M
LX MZ
LX O
LX R
LX Rebel
LX Rebel ES
LX T
LX TX
LX T5
OLP-S05FSL
OLP-S05FSL-OC
GIR-
Oslsq EC
Oslsq PC
Osl SSL150
Osl SSL80
Ostar-SMT RGB
MC-E
MK-R
MK-R2
MT-G
MX-3
MX-6
XB-D
XBH
XHL
XHL2
XOF
XP-E
XP-E2
XP-E HEW
XP-G
XP-G2
XP-L
XRE
XRE
XFE HW
M.J.4040
ZSM1
ZSM
ZSP
H35C0
H35B0
H35C1


2x2 modules




STRADA-2X2-A-T
D: 50 x 50 mm
H: 7,3 mm
PMMA
Typ. eff: 93%




STRADA-2X2-CY
D: 50x50 mm
H: 7,8 mm
PMMA
Typ. eff: 94%




STRADA-2X2-DWC
D: 50 x 50 mm
H: 6 mm
PMMA
Typ. eff: 93%




STRADA-2X2-DNW
D: 50 x 50 mm
H: 11 mm
PMMA
Typ. eff: 93%




STRADA-2X2-DN
D: 50 x 50 mm
H: 8,05 mm
PMMA




STRADA-2X2-ME
D: 50 x 50 mm
H: 8,2 mm
PMMA




STRADA-2X2-ME-WIDE1
D: 50 x 50 mm
H: 8,3 mm
PMMA




STRADA-2X2-XW
D: 50 x 50 mm
H: 7 mm
PMMA
Typ. eff: 94%




STRADA-2X2-T4
D: 50 x 50 mm
H: 7 mm
PMMA




STRADA-2X2-T3
D: 50 x 50 mm
H: 7 mm
PMMA



STRADA-2X2-PX
D: 50 x 50 mm
H: 8 mm
PMMA



STRADA-2X2-NHS
D: 50 x 50 mm
H: 9,8 mm
PMMA



STRADA-2X2-FN
D: 50 x 50 mm
H: 10 mm
PMMA
Typ. eff: 94%

STRADA 6X1 modules

Precision-engineered lens array.

Emitted light has an asymmetric tilt in the wide beam to efficiently direct light to the roadway surface and to minimize stray light outside of target areas.



STRADA-6X1-DNW
D: 119,8 x 25,2 mm
H: 5,6 mm
Typ. efficiency: 93%



STRADA-6X1-DWC
D: 119,8 x 25,2 mm
H: 5,5 mm
Typ. efficiency: 94%



STRADA-IP 2X6 modules



STRADA-IP-2X6-DWC

D: 173 x 71,4 mm, H: 7,9 mm
Typ. efficiency: 96%

STRADA-IP-2X6-T2

D: 173 x 71,4 mm, H: 7,9 mm
Typ. efficiency: 96%

STRADA-IP-2X6-T3

D: 173 x 71,4 mm, H: 7,9 mm
Typ. efficiency: 96%


STRADA-IP-2X6-ME

D: 173 x 71,4 mm, H: 7,9 mm
Typ. efficiency: 96%

This street lighting optic is designed for peak optical performance, ease of installation and protection from dirt and water. STRADA-IP-2X6-DWC is a precision-engineered 12-position lens array with a tilted beam to direct light efficiently to the roadway surface.

The integral silicone gasket protects up to IP67. The wide, asymmetric beam allows for rapid development of luminaires classified as IESNA Type II and III and related European and Russian street lighting classes.



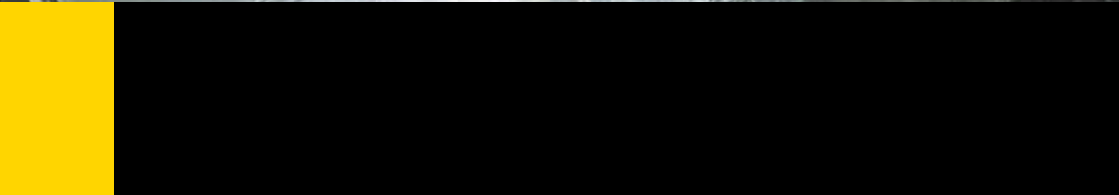

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru