


## Fast Soft Recovery Rectifier Diode, 60 A



### FEATURES

- 150 °C max. operating junction temperature
- Low forward voltage drop and short reverse recovery time
- Designed and qualified according to JEDEC®-JESD47
- Material categorization:  
For definitions of compliance please see [www.vishay.com/doc?99912](http://www.vishay.com/doc?99912)

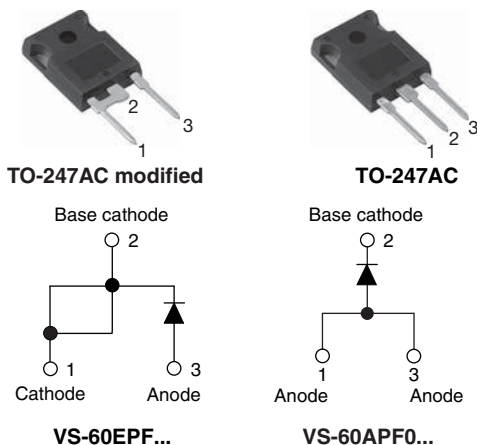

**RoHS**  
COMPLIANT  
HALOGEN  
**FREE**  
Available

### APPLICATIONS

These devices are intended for use in output rectification and freewheeling in inverters, choppers and converters as well as in input rectification where severe restrictions on conducted EMI should be met.

### DESCRIPTION

The VS-60EPF0... and VS-60APF0... soft recovery rectifier series has been optimized for combined short reverse recovery time and low forward voltage drop.

The glass passivation ensures stable reliable operation in the most severe temperature and power cycling conditions.

### PRODUCT SUMMARY

|                 |                             |
|-----------------|-----------------------------|
| Package         | TO-247AC modified, TO-247AC |
| $I_{F(AV)}$     | 60 A                        |
| $V_R$           | 200 V, 400 V, 600 V         |
| $V_F$ at $I_F$  | 1.3 V                       |
| $I_{FSM}$       | 830 A                       |
| $t_{rr}$        | 70 ns                       |
| $T_J$ max.      | 150 °C                      |
| Diode variation | Single die                  |
| Snap factor     | 0.5                         |

### MAJOR RATINGS AND CHARACTERISTICS

| SYMBOL      | CHARACTERISTICS     | VALUES     | UNITS |
|-------------|---------------------|------------|-------|
| $V_{RRM}$   |                     | 200 to 600 | V     |
| $I_{F(AV)}$ | Sinusoidal waveform | 60         | A     |
| $I_{FSM}$   |                     | 830        |       |
| $t_{rr}$    | 1 A, 100 A/μs       | 70         | ns    |
| $V_F$       | 30 A, $T_J = 25$ °C | 1.1        | V     |
| $T_J$       |                     | -40 to 150 | °C    |

### VOLTAGE RATINGS

| PART NUMBER                                                   | $V_{RRM}$ , MAXIMUM PEAK REVERSE VOLTAGE<br>V | $V_{RSM}$ , MAXIMUM NON-REPETITIVE PEAK REVERSE VOLTAGE<br>V | $I_{RRM}$<br>AT 150 °C<br>mA |
|---------------------------------------------------------------|-----------------------------------------------|--------------------------------------------------------------|------------------------------|
| VS-60EPF02PbF, VS-60APF02PbF,<br>VS-60EPF02-M3, VS-60APF02-M3 | 200                                           | 300                                                          | 10                           |
| VS-60EPF04PbF, VS-60APF04PbF,<br>VS-60EPF04-M3, VS-60APF04-M3 | 400                                           | 500                                                          |                              |
| VS-60EPF06PbF, VS-60APF06PbF,<br>VS-60EPF06-M3, VS-60APF06-M3 | 600                                           | 700                                                          |                              |

**ABSOLUTE MAXIMUM RATINGS**


| PARAMETER                                           | SYMBOL        | TEST CONDITIONS                                                    | VALUES | UNITS         |
|-----------------------------------------------------|---------------|--------------------------------------------------------------------|--------|---------------|
| Maximum average forward current                     | $I_{F(AV)}$   | $T_C = 106\text{ }^\circ\text{C}$ , 180° conduction half sine wave | 60     | A             |
| Maximum peak one cycle non-repetitive surge current | $I_{FSM}$     | 10 ms sine pulse, rated $V_{RRM}$ applied                          | 700    |               |
|                                                     |               | 10 ms sine pulse, no voltage reapplied                             | 830    |               |
| Maximum $I^2t$ for fusing                           | $I^2t$        | 10 ms sine pulse, rated $V_{RRM}$ applied                          | 2450   | $A^2s$        |
|                                                     |               | 10 ms sine pulse, no voltage reapplied                             | 3460   |               |
| Maximum $I^2\sqrt{t}$ for fusing                    | $I^2\sqrt{t}$ | $t = 0.1\text{ ms to }10\text{ ms}$ , no voltage reapplied         | 34 600 | $A^2\sqrt{s}$ |

**ELECTRICAL SPECIFICATIONS**

| PARAMETER                       | SYMBOL      | TEST CONDITIONS                        | VALUES | UNITS      |
|---------------------------------|-------------|----------------------------------------|--------|------------|
| Maximum forward voltage drop    | $V_{FM}$    | 60 A, $T_J = 25\text{ }^\circ\text{C}$ | 1.3    | V          |
| Forward slope resistance        | $r_t$       | $T_J = 150\text{ }^\circ\text{C}$      | 5.0    | m $\Omega$ |
| Threshold voltage               | $V_{F(TO)}$ |                                        | 0.88   | V          |
| Maximum reverse leakage current | $I_{RM}$    | $T_J = 25\text{ }^\circ\text{C}$       | 0.1    | mA         |
|                                 |             | $T_J = 150\text{ }^\circ\text{C}$      | 10     |            |

**RECOVERY CHARACTERISTICS**

| PARAMETER                | SYMBOL   | TEST CONDITIONS                                       | VALUES | UNITS   |
|--------------------------|----------|-------------------------------------------------------|--------|---------|
| Reverse recovery time    | $t_{rr}$ | $I_F$ at 60 A <sub>pk</sub><br>25 A/ $\mu s$<br>25 °C | 180    | ns      |
| Reverse recovery current | $I_{rr}$ |                                                       | 3.4    | A       |
| Reverse recovery charge  | $Q_{rr}$ |                                                       | 0.5    | $\mu C$ |
| Snap factor              | S        | Typical                                               | 0.5    |         |

**THERMAL - MECHANICAL SPECIFICATIONS**

| PARAMETER                                       | SYMBOL                            | TEST CONDITIONS                      | VALUES     | UNITS                  |
|-------------------------------------------------|-----------------------------------|--------------------------------------|------------|------------------------|
| Maximum junction and storage temperature range  | T <sub>J</sub> , T <sub>Stg</sub> |                                      | -40 to 150 | °C                     |
| Maximum thermal resistance, junction to case    | R <sub>thJC</sub>                 | DC operation                         | 0.4        | °C/W                   |
| Maximum thermal resistance, junction to ambient | R <sub>thJA</sub>                 |                                      | 40         |                        |
| Typical thermal resistance, case to heatsink    | R <sub>thCS</sub>                 | Mounting surface, smooth and greased | 0.2        |                        |
| Approximate weight                              |                                   |                                      | 6          | g                      |
|                                                 |                                   |                                      | 0.21       | oz.                    |
| Mounting torque                                 | minimum                           |                                      | 6 (5)      | kgf · cm<br>(lbf · in) |
|                                                 | maximum                           |                                      | 12 (10)    |                        |
| Marking device                                  |                                   | Case style TO-247AC modified         | 60EPF02    |                        |
|                                                 |                                   |                                      | 60EPF04    |                        |
|                                                 |                                   |                                      | 60EPF06    |                        |
|                                                 |                                   | Case style TO-247AC                  | 60APF02    |                        |
|                                                 |                                   |                                      | 60APF04    |                        |
|                                                 |                                   |                                      | 60APF06    |                        |

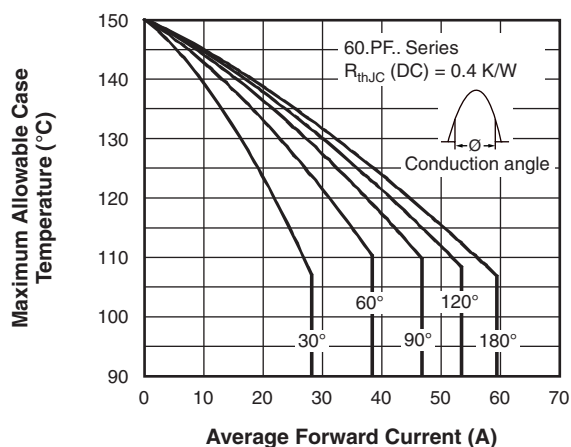


Fig. 1 - Current Rating Characteristics

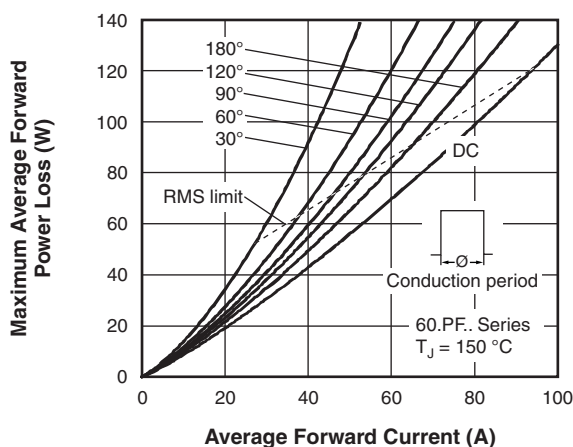


Fig. 4 - Forward Power Loss Characteristics

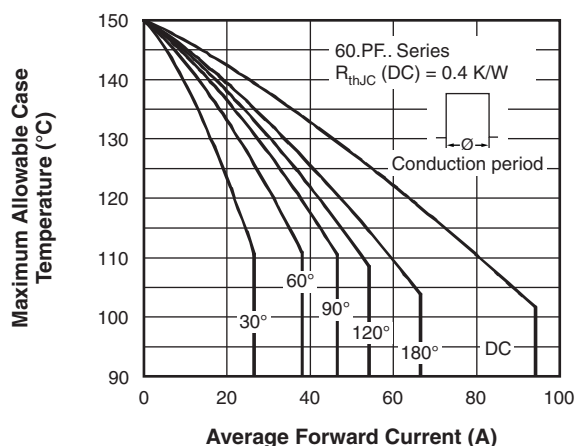


Fig. 2 - Current Rating Characteristics

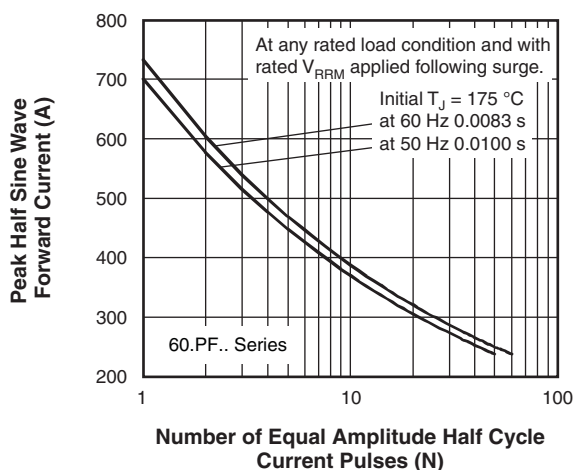


Fig. 5 - Maximum Non-Repetitive Surge Current

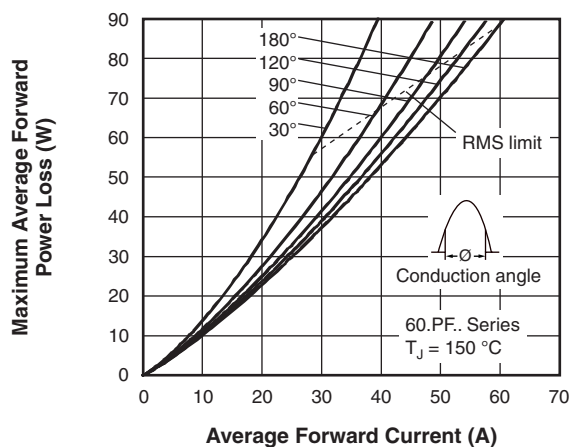


Fig. 3 - Forward Power Loss Characteristics

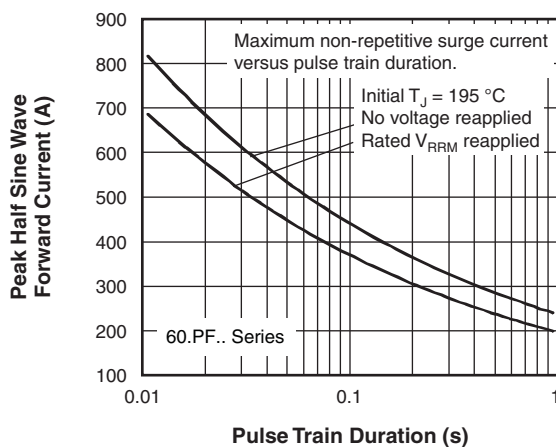


Fig. 6 - Maximum Non-Repetitive Surge Current

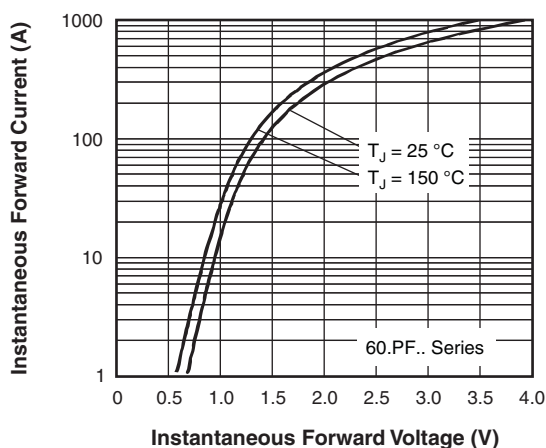
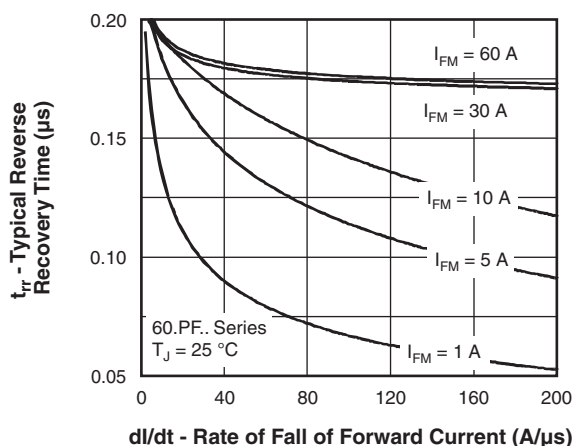
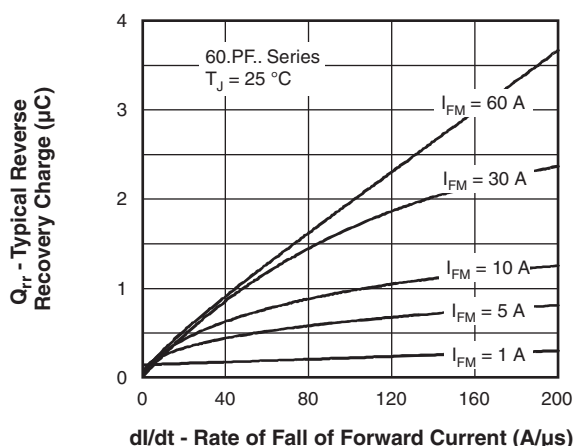
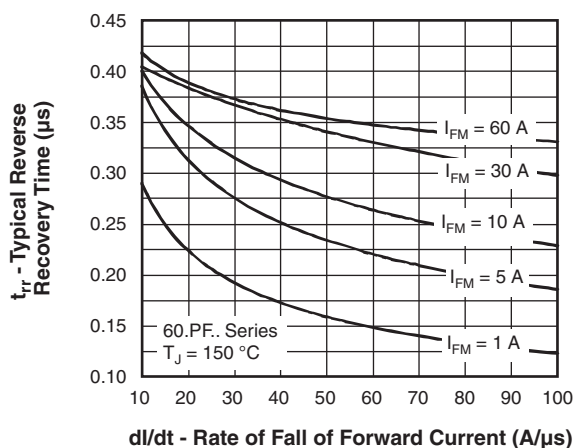
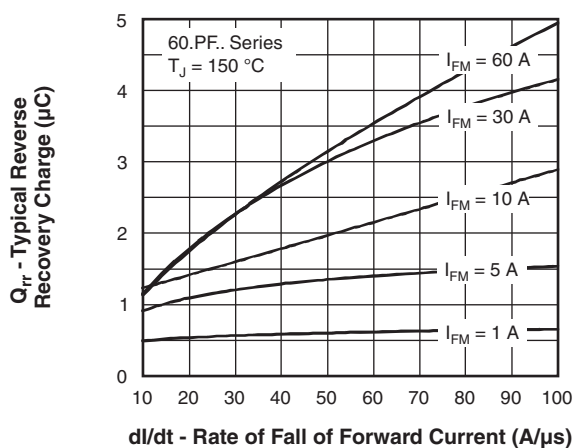


Fig. 7 - Forward Voltage Drop Characteristics


Fig. 8 - Recovery Time Characteristics,  $T_J = 25\text{ °C}$ 

Fig. 10 - Recovery Charge Characteristics,  $T_J = 25\text{ °C}$ 

Fig. 9 - Recovery Time Characteristics,  $T_J = 150\text{ °C}$ 

Fig. 11 - Recovery Charge Characteristics,  $T_J = 150\text{ °C}$

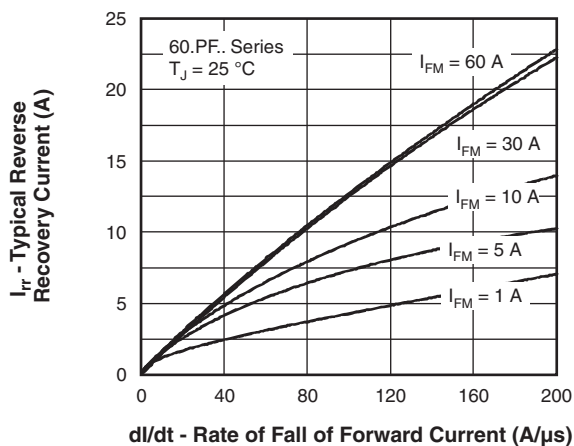


Fig. 12 - Recovery Current Characteristics,  $T_J = 25^\circ C$

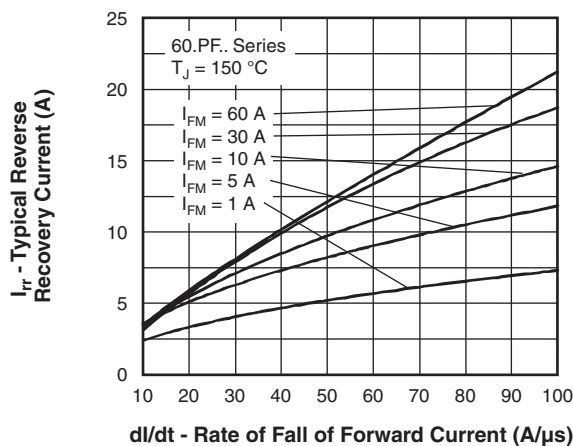


Fig. 13 - Recovery Current Characteristics,  $T_J = 150^\circ C$

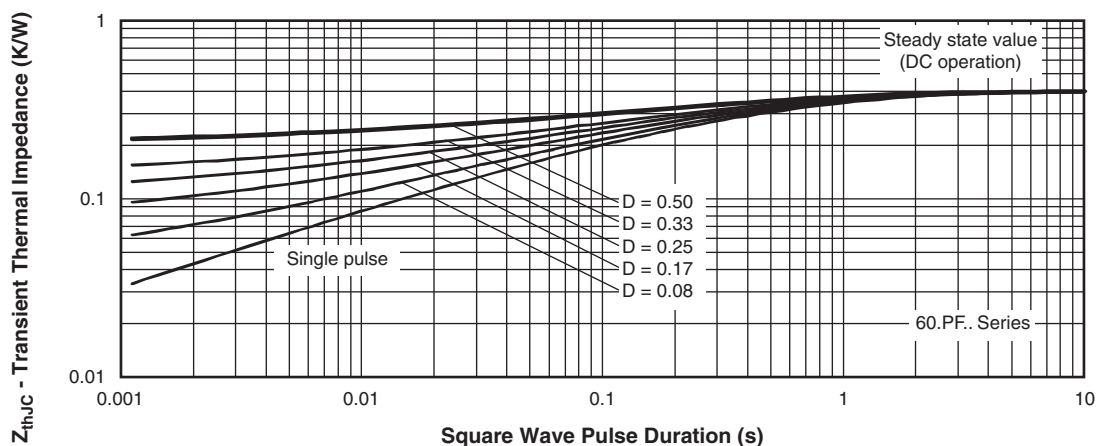


Fig. 14 - Thermal Impedance  $Z_{thJC}$  Characteristics

**ORDERING INFORMATION TABLE**

| Device code | VS-                                                                      | 60 | E | P | F | 06 | PbF |
|-------------|--------------------------------------------------------------------------|----|---|---|---|----|-----|
|             | 1                                                                        | 2  | 3 | 4 | 5 | 6  | 7   |
| <b>1</b>    | - Vishay Semiconductors product                                          |    |   |   |   |    |     |
| <b>2</b>    | - Current rating (60 = 60 A)                                             |    |   |   |   |    |     |
| <b>3</b>    | - Circuit configuration:<br>E = Single diode<br>A = Single diode, 3 pins |    |   |   |   |    |     |
| <b>4</b>    | - Package:<br>P = TO-247AC/TO-247AC modified                             |    |   |   |   |    |     |
| <b>5</b>    | - Type of silicon:<br>F = Fast recovery                                  |    |   |   |   |    |     |
| <b>6</b>    | - Voltage code x 100 = $V_{RRM}$                                         |    |   |   |   |    |     |
| <b>7</b>    | - Environmental digit:                                                   |    |   |   |   |    |     |

02 = 200 V  
 04 = 400 V  
 06 = 600 V

- PbF = Lead (Pb)-free and RoHS compliant
- -M3 = Halogen-free, RoHS compliant and terminations lead (Pb)-free

| <b>ORDERING INFORMATION (Example)</b> |                  |                        |                          |
|---------------------------------------|------------------|------------------------|--------------------------|
| PREFERRED P/N                         | QUANTITY PER T/R | MINIMUM ORDER QUANTITY | PACKAGING DESCRIPTION    |
| VS-60EPF02PbF                         | 25               | 500                    | Antistatic plastic tubes |
| VS-60EPF02-M3                         | 25               | 500                    | Antistatic plastic tubes |
| VS-60APF02PbF                         | 25               | 500                    | Antistatic plastic tubes |
| VS-60APF02-M3                         | 25               | 500                    | Antistatic plastic tubes |
| VS-60EPF04PbF                         | 25               | 500                    | Antistatic plastic tubes |
| VS-60EPF04-M3                         | 25               | 500                    | Antistatic plastic tubes |
| VS-60APF04PbF                         | 25               | 500                    | Antistatic plastic tubes |
| VS-60APF04-M3                         | 25               | 500                    | Antistatic plastic tubes |
| VS-60EPF06PbF                         | 25               | 500                    | Antistatic plastic tubes |
| VS-60EPF06-M3                         | 25               | 500                    | Antistatic plastic tubes |
| VS-60APF06PbF                         | 25               | 500                    | Antistatic plastic tubes |
| VS-60APF06-M3                         | 25               | 500                    | Antistatic plastic tubes |

| <b>LINKS TO RELATED DOCUMENTS</b> |                       |                                                                        |
|-----------------------------------|-----------------------|------------------------------------------------------------------------|
| Dimensions                        | TO-247AC modified     | <a href="http://www.vishay.com/doc?95541">www.vishay.com/doc?95541</a> |
|                                   | TO-247AC              | <a href="http://www.vishay.com/doc?95542">www.vishay.com/doc?95542</a> |
| Part marking information          | TO-247AC modified PbF | <a href="http://www.vishay.com/doc?95255">www.vishay.com/doc?95255</a> |
|                                   | TO-247AC modified -M3 | <a href="http://www.vishay.com/doc?95442">www.vishay.com/doc?95442</a> |
|                                   | TO-247AC PbF          | <a href="http://www.vishay.com/doc?95226">www.vishay.com/doc?95226</a> |
|                                   | TO-247AC -M3          | <a href="http://www.vishay.com/doc?95007">www.vishay.com/doc?95007</a> |
| SPIICE model                      |                       | <a href="http://www.vishay.com/doc?95275">www.vishay.com/doc?95275</a> |



## TO-247 - 50 mils L/F modified

DIMENSIONS in millimeters and inches



| SYMBOL | MILLIMETERS |       | INCHES |       | NOTES |
|--------|-------------|-------|--------|-------|-------|
|        | MIN.        | MAX.  | MIN.   | MAX.  |       |
| A      | 4.65        | 5.31  | 0.183  | 0.209 |       |
| A1     | 2.21        | 2.59  | 0.087  | 0.102 |       |
| A2     | 1.17        | 1.37  | 0.046  | 0.054 |       |
| b      | 0.99        | 1.40  | 0.039  | 0.055 |       |
| b1     | 0.99        | 1.35  | 0.039  | 0.053 |       |
| b2     | 1.65        | 2.39  | 0.065  | 0.094 |       |
| b3     | 1.65        | 2.34  | 0.065  | 0.092 |       |
| b4     | 2.59        | 3.43  | 0.102  | 0.135 |       |
| b5     | 2.59        | 3.38  | 0.102  | 0.133 |       |
| c      | 0.38        | 0.89  | 0.015  | 0.035 |       |
| c1     | 0.38        | 0.84  | 0.015  | 0.033 |       |
| D      | 19.71       | 20.70 | 0.776  | 0.815 | 3     |
| D1     | 13.08       | -     | 0.515  | -     | 4     |

| SYMBOL | MILLIMETERS |       | INCHES    |       | NOTES |
|--------|-------------|-------|-----------|-------|-------|
|        | MIN.        | MAX.  | MIN.      | MAX.  |       |
| D2     | 0.51        | 1.35  | 0.020     | 0.053 |       |
| E      | 15.29       | 15.87 | 0.602     | 0.625 | 3     |
| E1     | 13.46       | -     | 0.53      | -     |       |
| e      | 5.46 BSC    |       | 0.215 BSC |       |       |
| Ø K    | 0.254       |       | 0.010     |       |       |
| L      | 14.20       | 16.10 | 0.559     | 0.634 |       |
| L1     | 3.71        | 4.29  | 0.146     | 0.169 |       |
| N      | 7.62 BSC    |       | 0.3       |       |       |
| Ø P    | 3.56        | 3.66  | 0.14      | 0.144 |       |
| Ø P1   | -           | 7.39  | -         | 0.291 |       |
| Q      | 5.31        | 5.69  | 0.209     | 0.224 |       |
| R      | 4.52        | 5.49  | 0.178     | 0.216 |       |
| S      | 5.51 BSC    |       | 0.217 BSC |       |       |

## Notes

- Dimensioning and tolerance per ASME Y14.5M-1994
- Contour of slot optional
- Dimension D and E do not include mold flash. Mold flash shall not exceed 0.127 mm (0.005") per side. These dimensions are measured at the outermost extremes of the plastic body
- Thermal pad contour optional with dimensions D1 and E1
- Lead finish uncontrolled in L1
- Ø P to have a maximum draft angle of 1.5 to the top of the part with a maximum hole diameter of 3.91 mm (0.154")
- Outline conforms to JEDEC® outline TO-247 with exception of dimension c and Q



## TO-247 - 50 mils L/F

DIMENSIONS in millimeters and inches



| SYMBOL | MILLIMETERS |       | INCHES |       | NOTES |
|--------|-------------|-------|--------|-------|-------|
|        | MIN.        | MAX.  | MIN.   | MAX.  |       |
| A      | 4.65        | 5.31  | 0.183  | 0.209 |       |
| A1     | 2.21        | 2.59  | 0.087  | 0.102 |       |
| A2     | 1.17        | 1.37  | 0.046  | 0.054 |       |
| b      | 0.99        | 1.40  | 0.039  | 0.055 |       |
| b1     | 0.99        | 1.35  | 0.039  | 0.053 |       |
| b2     | 1.65        | 2.39  | 0.065  | 0.094 |       |
| b3     | 1.65        | 2.34  | 0.065  | 0.092 |       |
| b4     | 2.59        | 3.43  | 0.102  | 0.135 |       |
| b5     | 2.59        | 3.38  | 0.102  | 0.133 |       |
| c      | 0.38        | 0.89  | 0.015  | 0.035 |       |
| c1     | 0.38        | 0.84  | 0.015  | 0.033 |       |
| D      | 19.71       | 20.70 | 0.776  | 0.815 | 3     |
| D1     | 13.08       | -     | 0.515  | -     | 4     |

| SYMBOL | MILLIMETERS |       | INCHES    |       | NOTES |
|--------|-------------|-------|-----------|-------|-------|
|        | MIN.        | MAX.  | MIN.      | MAX.  |       |
| D2     | 0.51        | 1.35  | 0.020     | 0.053 |       |
| E      | 15.29       | 15.87 | 0.602     | 0.625 | 3     |
| E1     | 13.46       | -     | 0.53      | -     |       |
| e      | 5.46 BSC    |       | 0.215 BSC |       |       |
| Ø K    | 0.254       |       | 0.010     |       |       |
| L      | 14.20       | 16.10 | 0.559     | 0.634 |       |
| L1     | 3.71        | 4.29  | 0.146     | 0.169 |       |
| N      | 7.62 BSC    |       | 0.3       |       |       |
| Ø P    | 3.56        | 3.66  | 0.14      | 0.144 |       |
| Ø P1   | -           | 7.39  | -         | 0.291 |       |
| Q      | 5.31        | 5.69  | 0.209     | 0.224 |       |
| R      | 4.52        | 5.49  | 0.178     | 0.216 |       |
| S      | 5.51 BSC    |       | 0.217 BSC |       |       |

## Notes

- (1) Dimensioning and tolerancing per ASME Y14.5M-1994
- (2) Contour of slot optional
- (3) Dimension D and E do not include mold flash. Mold flash shall not exceed 0.127 mm (0.005") per side. These dimensions are measured at the outermost extremes of the plastic body
- (4) Thermal pad contour optional with dimensions D1 and E1
- (5) Lead finish uncontrolled in L1
- (6) Ø P to have a maximum draft angle of 1.5 to the top of the part with a maximum hole diameter of 3.91 mm (0.154")
- (7) Outline conforms to JEDEC® outline TO-247 with exception of dimension c and Q



## Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

## Material Category Policy

**Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as RoHS-Compliant fulfill the definitions and restrictions defined under Directive 2011/65/EU of The European Parliament and of the Council of June 8, 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment (EEE) - recast, unless otherwise specified as non-compliant.**

**Please note that some Vishay documentation may still make reference to RoHS Directive 2002/95/EC. We confirm that all the products identified as being compliant to Directive 2002/95/EC conform to Directive 2011/65/EU.**

**Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as Halogen-Free follow Halogen-Free requirements as per JEDEC JS709A standards. Please note that some Vishay documentation may still make reference to the IEC 61249-2-21 definition. We confirm that all the products identified as being compliant to IEC 61249-2-21 conform to JEDEC JS709A standards.**

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)