

Precision SMD TCXO/VCTCXO



7.0 x 5.0 x 1.9mm

AST3TQ-28



ESD Sensitive



RoHS/RoHS II Compliant

Moisture Sensitivity Level (MSL) – 3

FEATURES:

- Standard available frequencies: 10.00, 12.80, 15.36, 16.32, 16.384, 19.20, 19.44, 20.00, 25.00, 26.00, 30.72 & 40.00 MHz
- Standard LVC MOS Output
- Frequency stability of ± 280 ppb (± 0.28 ppm) over -40°C to $+85^{\circ}\text{C}$
- Excellent Phase Noise, Harmonics & Spurious content
- Typical rms jitter of 400fs @ 40MHz carrier & 1.0ps @ 10MHz carrier over 12kHz to 20MHz BW

APPLICATIONS:

- COTS Military Radios & other Communication Hardware
- WiMax,
- LTE, BTS
- CATV, LAN, LMDS
- GPS Tracking with Hold-Over accuracy
- Test & Measurement Equipment
- Point-to-Point communication networks

STANDARD SPECIFICATIONS:

| Parameters | Rating |
|---------------------------|---------------|
| Storage Temperature Range | -55 to +125°C |
| Supply Voltage | -0.5 to 6V |
| ESD, HBM/CDM/MM | 4kV/2kV/200V |

| Parameters | Minimum | Typical | Maximum | Units | Notes |
|--|--|-------------|-------------|------------|--|
| Frequency Range | 10 | | 40 | MHz | |
| Standard Frequencies: | 10.00, 12.80, 15.36, 16.32, 16.384, 19.20, 19.44, 20.00, 25.00, 26.00, 30.72 and 40.00 | | | MHz | |
| Initial Frequency Tolerance (@+25°C) at shipping | | | ± 0.3 | ppm | Relative to carrier |
| Frequency Stability Options | | | | | |
| -40°C to +85°C | | | ± 280 | ppb | |
| Frequency Stability vs. Supply Voltage Change (V _{dd} ±5%): | | | ± 100 | ppb | |
| Frequency Stability vs. Load Change (Load±5%): | | | ± 200 | ppb | |
| Supply Voltage (V _{dd}): | +3.135 | +3.3 | +3.465 | V | |
| Aging (first year @+25°C): | | | ± 1.0 | ppm | |
| Aging (20 years @+25°C): | | ± 3.0 | ± 4.6 | ppm | |
| Supply Current (I _{cc}) (into 15pF load): | | 3.0 | 4.0 | mA | @10MHz carrier |
| | | | 5.5 | | 7.0 |
| LVC MOS Output (Square wave) | | | | | |
| V _{OH} : | 2.4 | | | V | Load=15pF |
| V _{OL} : | | | 0.4 | V | Load=15pF |
| Load: | | | 15 | pF | |
| Duty Cycle: | 45 | | 55 | % | @(V _{OH} - V _{OL})/2 |
| Rise/Fall Time: | | | 6 | ns | Load=15pF |
| RMS Jitter (12kHz to 20MHz BW) | 0.4 | | 1.3 | ps | Carrier dependent |
| Control Port | | | | | Applicable for VCTCXO only |
| Voltage Range (V _c) | 0.50 | | +2.50 | V | |
| Frequency Pull | ± 7.00 | ± 10.00 | ± 12.00 | ppm | (V _c = 1.5V±1.0V) |
| Center Control Voltage (V _c) | | +1.50 | | | To be with-in ± 500 ppb of F _c @ 25°C |
| Port Impedance | 100 | | | k Ω | |
| Phase Noise (10MHz carrier frequency @25°C): | | | -95 | dBc/Hz | Offset @10Hz |
| | | | -120 | | Offset @100Hz |
| | | | -140 | | Offset @1kHz |
| | | | -145 | | Offset @10kHz |
| | | | -150 | | Offset @100kHz |

ABRACON IS
ISO9001:2008
CERTIFIED



ABRACON
CORPORATION

Visit www.abracon.com for Terms & Conditions of Sale
30332 Esperanza, Rancho Santa Margarita, California 92688
tel 949-546-8000 | fax 949-546-8001 | www.abracon.com

Revised: 09.18.14



7.0 x 5.0 x 1.9mm

AST3TQ-28

RoHS/RoHS II Compliant

OPTIONS & PART IDENTIFICATION: (left blank if standard)



FREQUENCY STABILITY VS. TEMPERATURE





7.0 x 5.0 x 1.9mm

TYPICAL PHASE NOISE

10.00 MHz Carrier



20.00 MHz Carrier



40.00 MHz Carrier






7.0 x 5.0 x 1.9mm


AST3TQ-28

RoHS/RoHS II Compliant

OUTLINE DIMENSION:

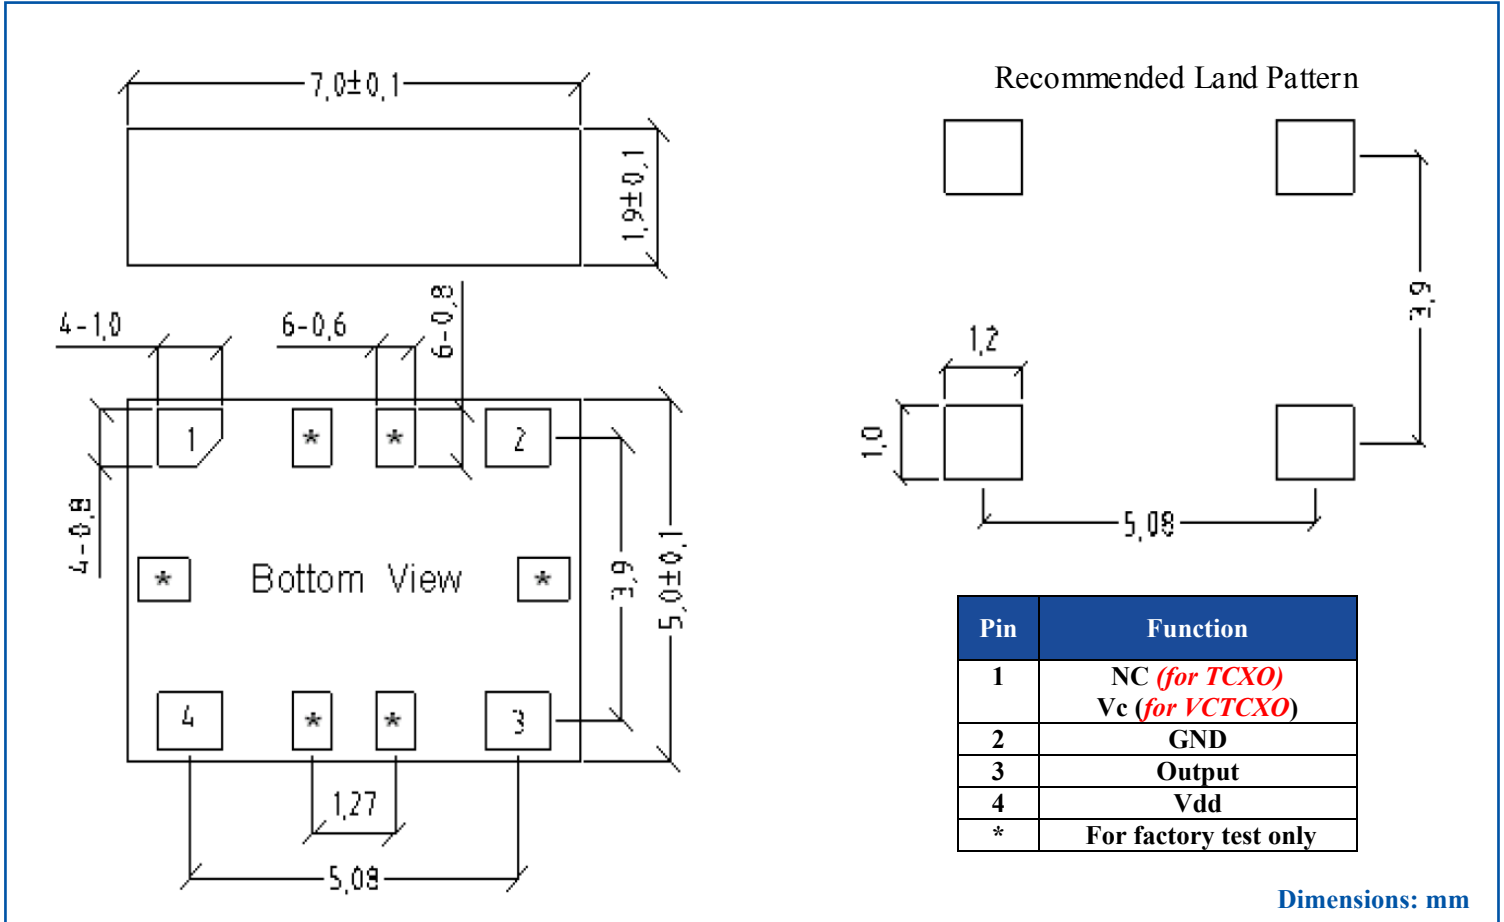

REFLOW PROFILE:

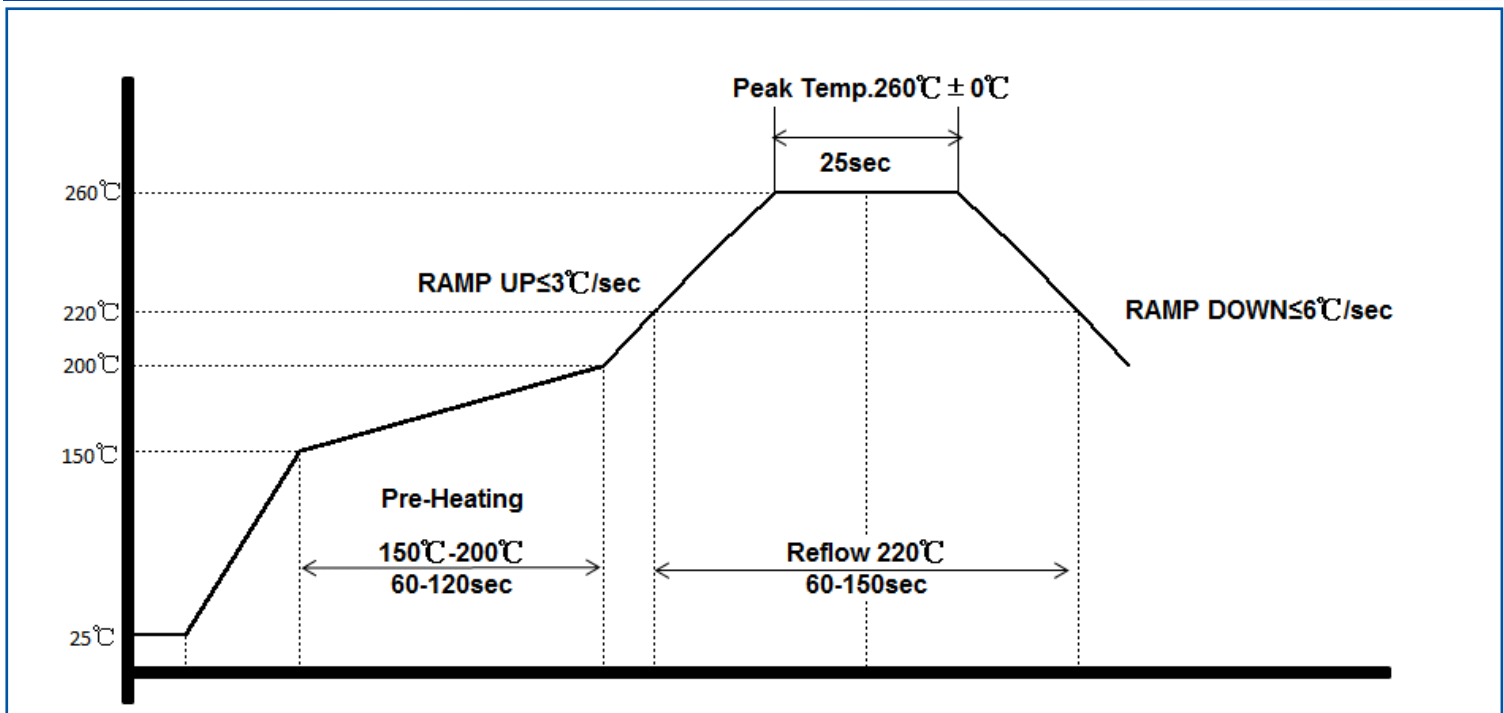



AST3TQ-28

7.0 x 5.0 x 1.9mm

AST3TQ-28

RoHS/RoHS II Compliant

TAPE & REEL:

Packaging:

T5: 500pcs/reel

T2: 2,000pcs/reel

MSL-3 packaging applies to MOQ=50 units (cut tape) & T5 and T2.



| W | A0 | B0 | K0 | P | F |
|----------|--------------|----------|----------|----------|---------|
| 16.0±0.3 | 5.7±0.15 | 7.6±0.15 | 2.4±0.15 | 8.0±0.1 | 7.5±0.1 |
| E | D | P0 | P2 | T | |
| 1.75±0.1 | 1.5+0.1/-0.0 | 4.0±0.1 | 2.0±0.1 | 0.3±0.05 | |



| W | A | N | T | E | F | D |
|----------|---------|---------|---------|---------|-----------|---------------|
| 16.5±0.4 | 330±0.5 | 100±0.3 | 1.8±0.2 | 2.1±0.3 | 10.75±0.3 | 13.5+0.5/-0.2 |

Dimensions: mm

ATTENTION: Abracon Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon Corporation is required. Please contact Abracon Corporation for more information.

ABRACON IS
ISO9001:2008
CERTIFIED



Visit www.abracon.com for Terms & Conditions of Sale **Revised: 09.18.14**
30332 Esperanza, Rancho Santa Margarita, California 92688
tel 949-546-8000 | fax 949-546-8001 | www.abracon.com

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru