


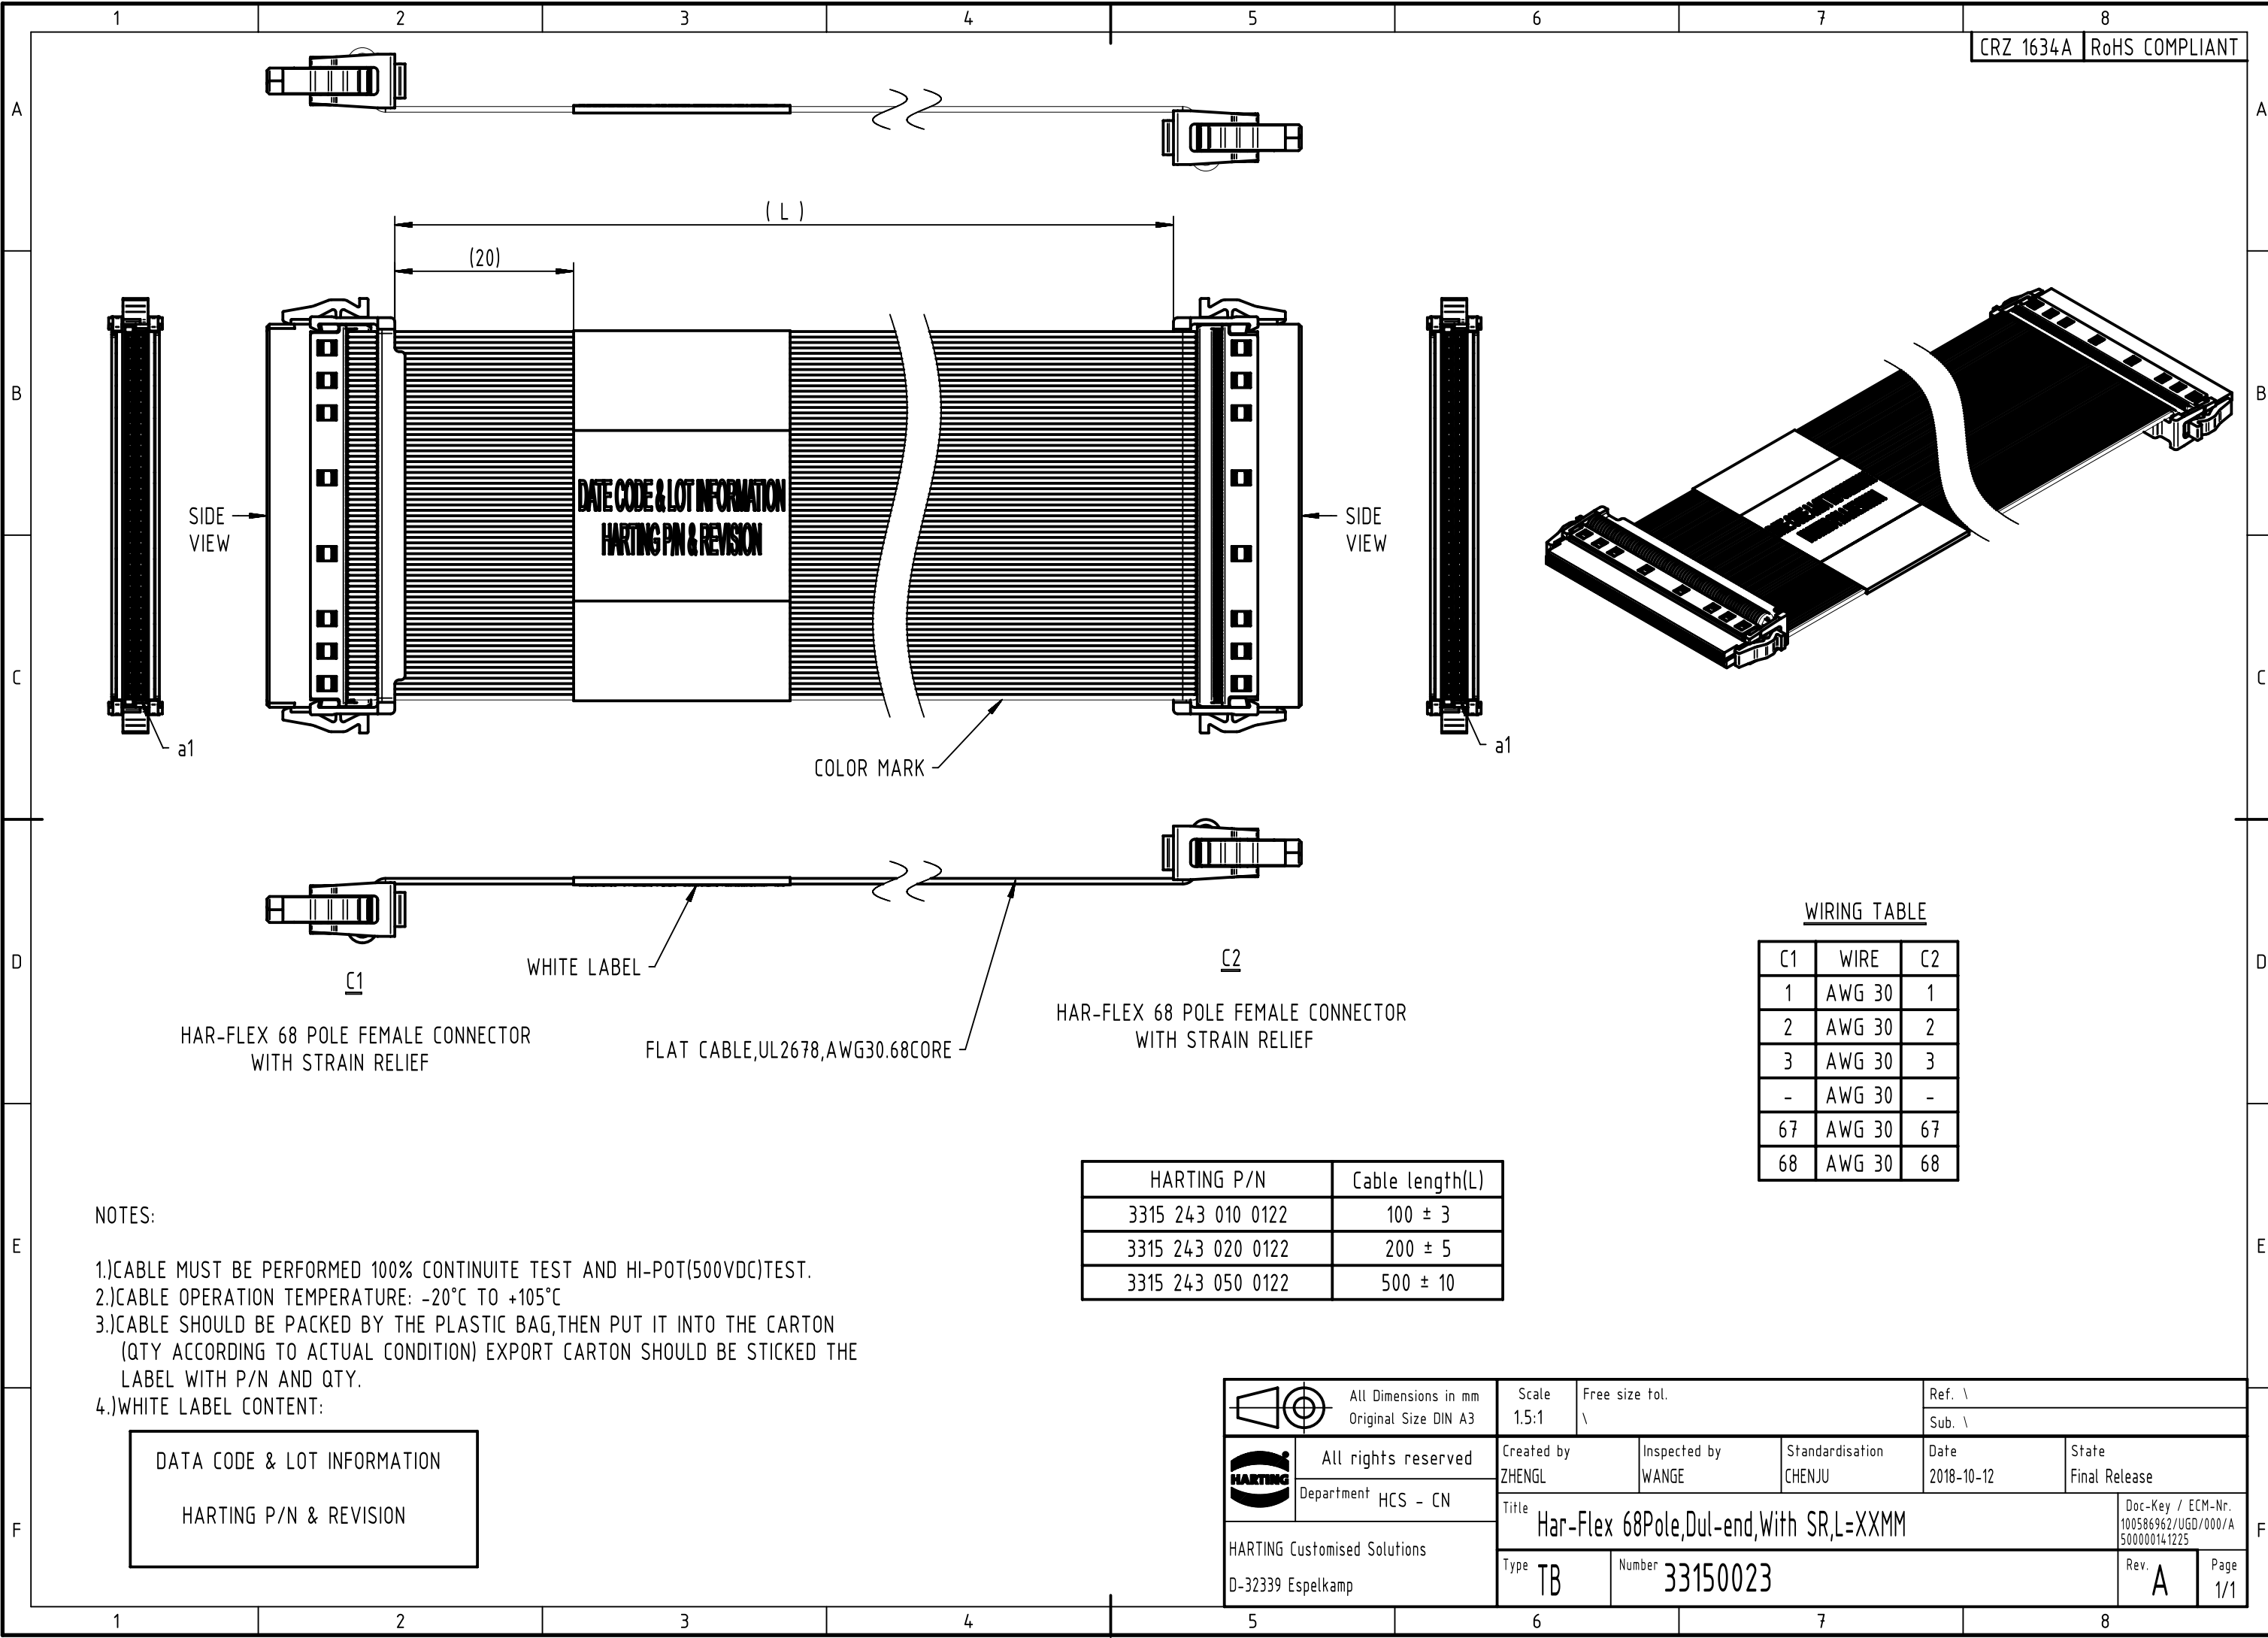

CRZ 1634A RoHS COMPLIANT

The drawing illustrates the Har-Flex 68 Pole Female Connector assembly. It includes a top view showing the flat cable with a central label area containing "DATE CODE & LOT INFORMATION" and "HARTING P/N & REVISION". Dimensions include a length of (L) and a width of (20). A color mark is indicated on the cable. Side views show the connectors labeled C1 and C2, which are HAR-FLEX 68 POLE FEMALE CONNECTOR WITH STRAIN RELIEF. The flat cable is specified as UL2678, AWG30, 68 CORE. A white label is also shown.

WIRING TABLE

C1	WIRE	C2
1	AWG 30	1
2	AWG 30	2
3	AWG 30	3
-	AWG 30	-
67	AWG 30	67
68	AWG 30	68

HARTING P/N vs Cable length(L)

HARTING P/N	Cable length(L)
3315 243 010 0122	100 ± 3
3315 243 020 0122	200 ± 5
3315 243 050 0122	500 ± 10

NOTES:

- 1.)CABLE MUST BE PERFORMED 100% CONTINUITE TEST AND HI-POT(500VDC)TEST.
- 2.)CABLE OPERATION TEMPERATURE: -20°C TO +105°C
- 3.)CABLE SHOULD BE PACKED BY THE PLASTIC BAG,THEN PUT IT INTO THE CARTON (QTY ACCORDING TO ACTUAL CONDITION) EXPORT CARTON SHOULD BE STICKED THE LABEL WITH P/N AND QTY.
- 4.)WHITE LABEL CONTENT:
DATA CODE & LOT INFORMATION
HARTING P/N & REVISION

Legend:

- All Dimensions in mm Original Size DIN A3
- Scale 1.5:1
- Free size tol.
- Ref. \
- Sub. \
- All rights reserved
- Department HCS - CN
- HARTING Customised Solutions D-32339 Espelkamp
- Created by ZHENGL
- Inspected by WANGE
- Standardisation CHENJU
- Date 2018-10-12
- State Final Release
- Title Har-Flex 68Pole,Dul-end,With SR,L=XXMM
- Type TB
- Number 33150023
- Doc-Key / ECM-Nr. 100586962/UGD/000/A 500000141225
- Rev. A
- Page 1/1

CRZ 1634A RoHS COMPLIANT

The drawing illustrates the HAR-FLEX 68 Pole Flat Cable Assembly. The top view shows two connectors, C1 and C2, both labeled as "HAR-FLEX 68 POLE FEMALE CONNECTOR WITH STRAIN RELIEF". They are connected by a "FLAT CABLE, UL2678, AWG30, 68 CORE". A "WHITE LABEL" is positioned between the connectors. Dimensions include a cable length (L) and a width of (20). A "COLOR MARK" is indicated on the cable. Side views show the profile of the assembly, with dimension 'a1' marking the height from the base to the center of the connector pins.

**DATE CODE & LOT INFORMATION
HARTING P/N & REVISION**

WIRING TABLE

C1	WIRE	C2
1	AWG 30	1
2	AWG 30	2
3	AWG 30	3
-	AWG 30	-
67	AWG 30	67
68	AWG 30	68

HARTING P/N Cable length(L)

3315 243 010 0122	100 ± 3
3315 243 020 0122	200 ± 5
3315 243 050 0122	500 ± 10

NOTES:

- 1.)CABLE MUST BE PERFORMED 100% CONTINUITY TEST AND HI-POT(500VDC)TEST.
- 2.)CABLE OPERATION TEMPERATURE: -20°C TO +105°C
- 3.)CABLE SHOULD BE PACKED BY THE PLASTIC BAG, THEN PUT IT INTO THE CARTON (QTY ACCORDING TO ACTUAL CONDITION) EXPORT CARTON SHOULD BE STICKED THE LABEL WITH P/N AND QTY.
- 4.)WHITE LABEL CONTENT:

DATA CODE & LOT INFORMATION
HARTING P/N & REVISION

HARTING Customised Solutions
D-32339 Espelkamp

	All rights reserved	Created by ZHENGL	Inspected by WANGE	Standardisation CHENJU	Date 2018-10-12	State Final Release
	Department HCS - CN	Title Har-Flex 68Pole,Dul-end,With SR,L=XXMM	Type TB	Number 33150023	Rev. A	Page 1/1

1 2 3 4 5 6 7 8

CRZ 1634A RoHS COMPLIANT

A

B

C

D

E

F

1 2 3 4 5 6 7 8

DATE CODE & LOT INFORMATION
HARTING P/N & REVISION

COLOR MARK

WHITE LABEL

HAR-FLEX 68 POLE FEMALE CONNECTOR WITH STRAIN RELIEF

FLAT CABLE, UL2678, AWG30, 68 CORE

HAR-FLEX 68 POLE FEMALE CONNECTOR WITH STRAIN RELIEF

WIRING TABLE

C1	WIRE	C2
1	AWG 30	1
2	AWG 30	2
3	AWG 30	3
-	AWG 30	-
67	AWG 30	67
68	AWG 30	68

NOTES:

- 1.)CABLE MUST BE PERFORMED 100% CONTINUITY TEST AND HI-POT(500VDC)TEST.
- 2.)CABLE OPERATION TEMPERATURE: -20°C TO +105°C
- 3.)CABLE SHOULD BE PACKED BY THE PLASTIC BAG, THEN PUT IT INTO THE CARTON (QTY ACCORDING TO ACTUAL CONDITION) EXPORT CARTON SHOULD BE STICKED THE LABEL WITH P/N AND QTY.
- 4.)WHITE LABEL CONTENT:

HARTING P/N	Cable length(L)
3315 243 010 0122	100 ± 3
3315 243 020 0122	200 ± 5
3315 243 050 0122	500 ± 10

All Dimensions in mm Original Size DIN A3		Scale 1:1	Free size tol.	Ref. \
All rights reserved Department HCS - CN		Created by ZHENG L	Inspected by WANG E	Standardisation CHEN J U
HARTING Customised Solutions D-32339 Espelkamp		Title Har-Flex 68 Pole, Dul-end, With SR, L=XXMM		
		Type TB	Number 33150023	Doc-Key / ECM-Nr. 100586962/UGD/000/A 500000141225
		Rev. A Page 1/1		

- 1 2 3 4 5 6 7 8

CRZ 1634A RoHS COMPLIANT

A

B

C

D

E

F

1 2 3 4 5 6 7 8

DATE CODE & LOT INFORMATION
HARTING P/N & REVISION

COLOR MARK

WHITE LABEL

HAR-FLEX 68 POLE FEMALE CONNECTOR WITH STRAIN RELIEF

FLAT CABLE, UL2678, AWG30, 68 CORE

HAR-FLEX 68 POLE FEMALE CONNECTOR WITH STRAIN RELIEF

WIRING TABLE

C1	WIRE	C2
1	AWG 30	1
2	AWG 30	2
3	AWG 30	3
-	AWG 30	-
67	AWG 30	67
68	AWG 30	68

NOTES:

 - 1.)CABLE MUST BE PERFORMED 100% CONTINUITY TEST AND HI-POT(500VDC)TEST.
 - 2.)CABLE OPERATION TEMPERATURE: -20°C TO +105°C
 - 3.)CABLE SHOULD BE PACKED BY THE PLASTIC BAG, THEN PUT IT INTO THE CARTON (QTY ACCORDING TO ACTUAL CONDITION) EXPORT CARTON SHOULD BE STICKED THE LABEL WITH P/N AND QTY.
 - 4.)WHITE LABEL CONTENT:

HARTING P/N	Cable length(L)
3315 243 010 0122	100 ± 3
3315 243 020 0122	200 ± 5
3315 243 050 0122	500 ± 10

All Dimensions in mm Original Size DIN A3		Scale 1:1	Free size tol.	Ref. \
All rights reserved Department HCS - CN		Created by ZHENG L	Inspected by WANG E	Standardisation CHEN J U
HARTING Customised Solutions D-32339 Espelkamp		Title Har-Flex 68 Pole, Dul-end, With SR, L=XXMM		
		Type TB	Number 33150023	Doc-Key / ECM-Nr. 100586962/UGD/000/A 500000141225
		Rev. A Page 1/1		

[illegible]

1 2 3 4 5 6 7 8

CRZ 1634A RoHS COMPLIANT

A

B

C

D

E

F

1 2 3 4 5 6 7 8

DATE CODE & LOT INFORMATION
HARTING P/N & REVISION

COLOR MARK

WHITE LABEL

C1

C2

HAR-FLEX 68 POLE FEMALE CONNECTOR WITH STRAIN RELIEF

FLAT CABLE, UL2678, AWG30.68CORE

HAR-FLEX 68 POLE FEMALE CONNECTOR WITH STRAIN RELIEF

WIRING TABLE

C1	WIRE	C2
1	AWG 30	1
2	AWG 30	2
3	AWG 30	3
-	AWG 30	-
67	AWG 30	67
68	AWG 30	68

NOTES:

- 1.)CABLE MUST BE PERFORMED 100% CONTINUITY TEST AND HI-POT(500VDC)TEST.
- 2.)CABLE OPERATION TEMPERATURE: -20°C TO +105°C
- 3.)CABLE SHOULD BE PACKED BY THE PLASTIC BAG, THEN PUT IT INTO THE CARTON (QTY ACCORDING TO ACTUAL CONDITION) EXPORT CARTON SHOULD BE STICKED THE LABEL WITH P/N AND QTY.
- 4.)WHITE LABEL CONTENT:

HARTING P/N	Cable length(L)
3315 243 010 0122	100 ± 3
3315 243 020 0122	200 ± 5
3315 243 050 0122	500 ± 10

All Dimensions in mm Original Size DIN A3		Scale 1:1	Free size tol.	Ref. \
All rights reserved Department HCS - CN		Created by ZHENG L	Inspected by WANG E	Standardisation CHEN J U
HARTING Customised Solutions D-32339 Espelkamp		Title Har-Flex 68 Pole, Dul-end, With SR, L=XXMM		
		Type TB	Number 33150023	Doc-Key / ECM-Nr. 100586962/UGD/000/A 500000141225
		Rev. A		
		Page 1/1		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

HARTING:

[33152430100122](#) [33152430500122](#) [33152430200122](#)

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru