

# XP™ 2.7V 50F

BCAP0050 P270 X01

ESHSR-0050C0-002R7UC


# Datasheet

## FEATURES

- Enhanced performance under adverse environmental conditions
- Patent pending improvements both in structure and in sealing
- Long lifetimes with up to 500,000 duty cycles\*
- Compliant with UL, RoHS, and REACH requirements
- Recommended Application:  
Actuators, Emergency Lighting, Telematics, Automotive, Security Equipment, Backup System, Smoke Detectors, Advanced Metering, and Others



See Note on Mounting Recommendations<sup>10</sup>

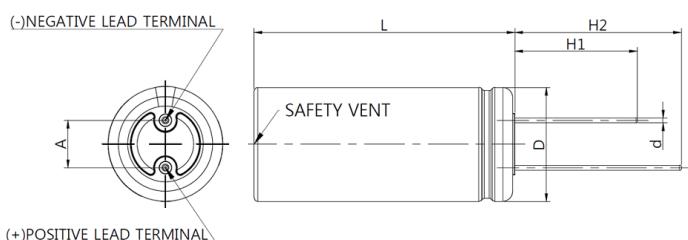

## OPERATING ENVIRONMENT / POWER & ENERGY

### Operating Temperature Range

Maximum Stored Energy,  $E_{max}$ <sup>7</sup>

Gravimetric Specific Energy<sup>7</sup>

Usable Specific Power<sup>7</sup>

Impedance Match Specific Power<sup>7</sup>

### Standard (-40°C to 65°C)

at 2.7V 50.6 mWh

at 2.7V 4.0 Wh/kg

at 2.7V 4.4 kW/kg

at 2.7V 9.1 kW/kg

### Extended (-40°C to 85°C)

at 2.3V 36.7 mWh

at 2.3V 2.9 Wh/kg

at 2.3V 3.2 kW/kg

at 2.3V 6.6 kW/kg

## ELECTRICAL SPECIFICATIONS

Rated Voltage, $V_R$	2.7 VDC
Surge Voltage <sup>1</sup>	2.85 VDC
Rated Capacitance, $C$ <sup>2</sup>	50 F
Capacitance Tolerance	Min. / Max. -10% / +20% Average <sup>4</sup> +5% / +10%
Initial DC-ESR, $R_{DC}$ <sup>3</sup>	Max. 16 mΩ Average <sup>4</sup> 10 mΩ
Maximum Leakage Current <sup>5</sup>	73 µA
Maximum Peak Current, Non-repetitive <sup>6</sup>	37.5 A

## TYPICAL LIFETIME CHARACTERISTICS\*

Projected DC Life at Room Temperature <sup>8</sup> (Continuous charging at $V_R$ and 25 ± 10 °C)	10 years
DC Life at Standard High Temperature <sup>8</sup> (Continuous charging at $V_R$ and 65°C)	1,500 hours
DC Life at De-Rated Voltage & Higher Temp. <sup>8</sup> (Continuous charging at 2.3V and 85°C)	1,500 hours
Projected Cycle Life at Room Temperature <sup>8</sup> (Constant current charge-discharge from $V_R$ to 1/2 $V_R$ at 25 ± 10 °C)	500,000 cycles
Biased Humidity Life (Continuous charging at $V_R$ , 60°C, and 90% RH)	3,000 hours
Shelf Life (Stored without charge at 25 ± 10 °C)	4 years

## TYPICAL THERMAL CHARACTERISTICS

Thermal Resistance, $R_{th}$ (Housing)	25 °C/W
Thermal Capacitance, $C_{th}$	11 J/°C
Usable Continuous Current ( $\Delta T = 15^\circ\text{C}$ ) <sup>9</sup>	6.1 A
Usable Continuous Current ( $\Delta T = 40^\circ\text{C}$ ) <sup>9</sup>	10.0 A

## DIMENSION & WEIGHT

D (+0.5)	18.0 mm	H1 (Min.)	15.0 mm
L (±1.0)	41.0 mm	H2 (Min.)	19.0 mm
d (±0.05)	0.8 mm	A (±0.5)	7.5 mm
Nominal Weight			12.4 g

## SAFETY & ENVIRONMENTAL

RoHS &amp; REACH &amp; UL

Compliant

\*Results may vary. Additional terms and conditions, including the limited warranty, apply at the time of purchase. See the warranty details for applicable operating and use requirements.


## NOTE

### 1. Surge Voltage

Absolute maximum voltage, non-repetitive. The duration must not exceed 1 second.

### 2. Rated Capacitance (Measurement Method)

- > Constant current charge with 10 mA per farad to  $V_R$ .  
e.g. In case of 2.7V 50F cell,  $10 * 50 = 500$  mA
- > Constant voltage charge at  $V_R$  for 5 min.
- > Constant current discharge with 10 mA per farad to 0.1V.

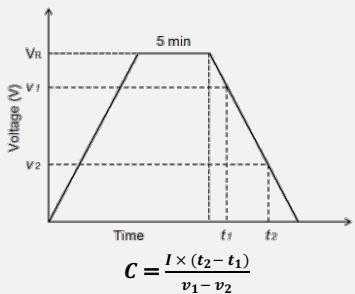


where  $C$  is the capacitance (F);

$I$  is the absolute value of the discharge current (A);  
 $v_1$  is the measurement starting voltage,  $0.8 \times V_R$  (V);  
 $v_2$  is the measurement end voltage,  $0.4 \times V_R$  (V);  
 $t_1$  is the time from discharge start to reach  $v_1$  (s);  
 $t_2$  is the time from discharge start to reach  $v_2$  (s)

### 3. Initial DC-ESR (Measurement Method)

- > Constant current charge with 10 mA per farad to  $V_R$ .
- > Constant voltage charge at  $V_R$  for 5 min.
- > Constant current discharge with  $40 * C * V_R$  [mA] to 0.1V.  
e.g. In case of 2.7V 50F cell,  $40 * 50 * 2.7 = 5,400$  mA



where  $ESR_{DC}$  is the DC-ESR ( $\Omega$ );

$\Delta v$  is the voltage drop during first 10ms of discharge (V);  
 $I$  is the absolute value of the discharge current (A)

### 4. Average

- > Typical percentage spread that may be present in one shipment.

### 5. Maximum Leakage Current (Measurement Method)

- > The capacitor is charged to its rated voltage  $V_R$  at 25°C.
- > Leakage current is the amount of current measured after 72 hours of continuous holding of the capacitor at  $V_R$ .

When ordering, please reference the Maxwell Model Number below.

Maxwell Model Number: BCAP0050 P270 X01	Maxwell Part Number: 133521	Nesscap Model Number: ESHSR-0050C0-002R7UC
--	--------------------------------	---

Maxwell Technologies, Inc.  
Global Headquarters  
3888 Calle Fortunada  
San Diego, CA 92123  
USA  
Tel: +1 (858) 503-3300  
Fax: +1 (858) 503-3301

Maxwell Technologies SA  
Route de Montena 65  
CH-1728 Rossens  
Switzerland  
Tel: +41 (0)26 411 85 00  
Fax: +41 (0)26 411 85 05

Maxwell Technologies, GmbH  
Leopoldstrasse 244  
80807 Munich  
Germany  
Tel: +49 (0)89 4161403 0  
Fax: +49 (0)89 4161403 99

Maxwell Technologies  
Shanghai Trading Co., Ltd  
Room 1005, 1006, 1007  
No. 1898, Gonghexin Road,  
Jing An District, Shanghai 200072  
P.R. China  
Tel: +86 21 3680 4600  
Fax: +86 21 3680 4699

Nesscap Co., Ltd.  
17, Dongtangheung-ro 681beon-gil,  
Giheung-gu, Yongin-si,  
Gyeonggi-do  
17102  
Republic of Korea  
Tel: +82 31 289 0721  
Fax: +82 31 286 6767

The data in this document 3001958 corresponds to the data in Nesscap document 20170613 Rev06. The information in this document is correct at time of printing and is subject to change without notice. Images are not to scale.

MAXWELL TECHNOLOGIES, MAXWELL, MAXWELL CERTIFIED INTEGRATOR, ENABLING ENERGY'S FUTURE, NESSCAP, BOOSTCAP, D CELL, CONDIS and their respective designs and/or logos are either trademarks or registered trademarks of Maxwell Technologies, Inc., and/or its affiliates, and may not be copied, imitated or used, in whole or in part, without the prior written permission Maxwell Technologies, Inc. All contents copyright © 2017 Maxwell Technologies, Inc. All rights reserved. No portion of these materials may be reproduced in any form, or by any means, without prior written permission from Maxwell Technologies, Inc.

ООО "ЛайфЭлектроникс"

"LifeElectronics" LLC

ИНН 7805602321 КПП 780501001 Р/С 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 30101810900000000703 БИК 044030703

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибуторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибуторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помочь разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)  
Email: org@lifeelectronics.ru