



# TDI / TDIH / TDIL SERIES



8-PIN

## Wiring Diagram

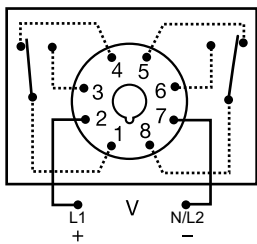

Relay contacts are isolated.

## Description

The TDI Series is an interval timer that combines accurate digital circuitry with isolated, 10A rated, DPDT relay contacts in an 8-pin plug-in package. The TDI Series features DIP switch selectable time delays ranging from 0.1 to 10,230 seconds in three ranges. The TDI Series is the product of choice for custom control panel and OEM designers.

### Operation (Interval)

Upon application of input voltage, the time delay begins. The output relay is energized during the time delay. At the end of the time delay, the output de-energizes and remains de-energized until input voltage is removed.

**Reset:** Removing input voltage resets the time delay and the output.

## Features & Benefits

FEATURES	BENEFITS
<b>Digital circuitry</b>	Repeat Accuracy + / - 0.1%, Setting accuracy + / - 2%
<b>Isolated, 10A, DPDT output contacts</b>	Allows control of loads for AC or DC voltages
<b>DIP switch adjustment</b>	Provides first time setting accuracy
<b>Industry standard octal plug connection</b>	Eliminates need for special connectors
<b>LED indication</b>	Provides visual indication of timing and output status

## Accessories



### BZ1 Front Panel Mount Kit

Provides an easy method of through-the-panel mounting of 8- or 11-pin plug-in timers, flashers, and other controls.



### NDS-8 Octal 8-pin Socket

8-pin 35mm DIN rail or surface mount. Surface mounted with two #6 (M 3.5 x 0.6) screws or snaps onto a 35 mm DIN rail. Uses PSC8 hold-down clips.



### PSC8 Hold-down Clips

Securely mounts plug-in controls in any position. Provides protection against vibration. Use with NDS-8 Octal Socket. Sold in pairs.



### C103PM (AL) DIN Rail

35 mm aluminum DIN rail available in a 36 in. (91.4 cm) length.

## Ordering Information

MODEL	INPUT VOLTAGE	TIME DELAY	LED
TDI120AL	120VAC	1 - 1023s in 1s increments	Yes
TDI12D	12VDC	1 - 1023s in 1s increments	No
TDIH24AL	24VAC	10 - 10,230s in 10s increments	Yes
TDIL120AL	120VAC	0.1 - 102.3s in 0.1s increments	Yes
TDIL24DL	24VDC	0.1 - 102.3s in 0.1s increments	Yes

If you don't find the part you need, call us for a custom product 800-843-8848

# TDI / TDIH / TDIL SERIES

## Specifications

### Time Delay

<b>Type</b>	Digital integrated circuitry
<b>Range**</b>	0.1 - 102.3s in 0.1s increments 1 - 1023s in 1s increments 10 - 10,230s in 10s increments
<b>Repeat Accuracy</b>	±0.1% or 20ms, whichever is greater
<b>Setting Accuracy</b>	±2% or 50ms, whichever is greater
<b>Reset Time</b>	≤ 50ms
<b>Recycle Time</b>	≤ 150ms
<b>Time Delay vs Temp. &amp; Voltage</b>	±2%
<b>Indicator</b>	LED glows during timing; relay is energized

### Input

<b>Voltage</b>	12, 24, or 110VDC; 24, 120, or 230VAC
<b>Tolerance</b>	
<b>12VDC &amp; 24VDC/AC</b>	-15% - +20%
<b>110 to 230VAC/DC</b>	-20% - +10%
<b>AC Line Frequency</b>	50/60 Hz
<b>Power Consumption</b>	≤ 3.25W

### Output

<b>Type</b>	Electromechanical relay
<b>Form</b>	DPDT
<b>Rating</b>	10A resistive @ 120/240VAC & 28VDC; 1/3 hp @ 120/240VAC
<b>Life</b>	Mechanical - 1 x 10 <sup>7</sup> ; Electrical - 1 x 10 <sup>6</sup>

### Protection

<b>Polarity</b>	DC units are reverse polarity protected
<b>Isolation Voltage</b>	≥ 1500V RMS input to output

### Mechanical

<b>Mounting</b>	Plug-in socket
<b>Dimensions</b>	<b>H</b> 81.3 mm (3.2"); <b>W</b> 60.7 mm (2.4"); <b>D</b> 45.2 mm (1.8")

### Termination


Octal 8-pin plug-in

### Environmental


<b>Operating/Storage Temperature</b>	-20° to 65°C / -30° to 85°C
<b>Weight</b>	≈ 6 oz (170 g)

\*\* For CE approved applications, power must be removed from the unit when a switch position is changed.

## Digi-Set Binary Switch Operation

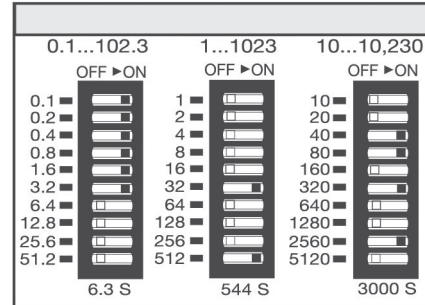

## Function Diagram

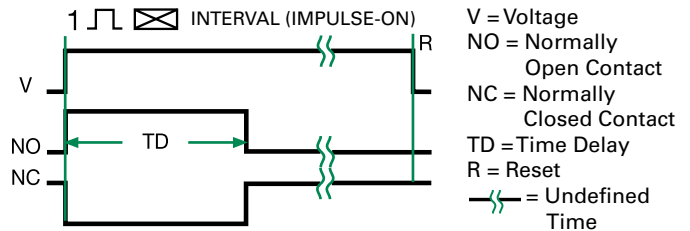

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)