

- NOTES
- 1

100 TRAY PACK IN ACCORDANCE WITH AMP SPEC 107-3275
- 2

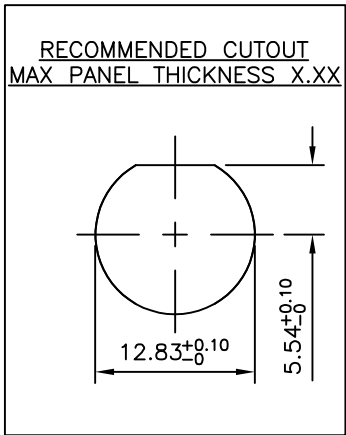
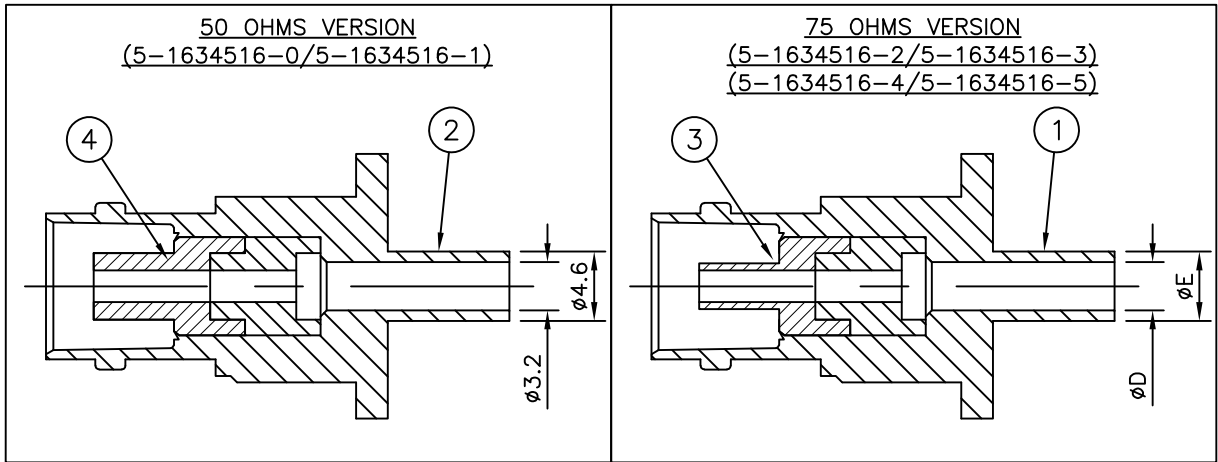
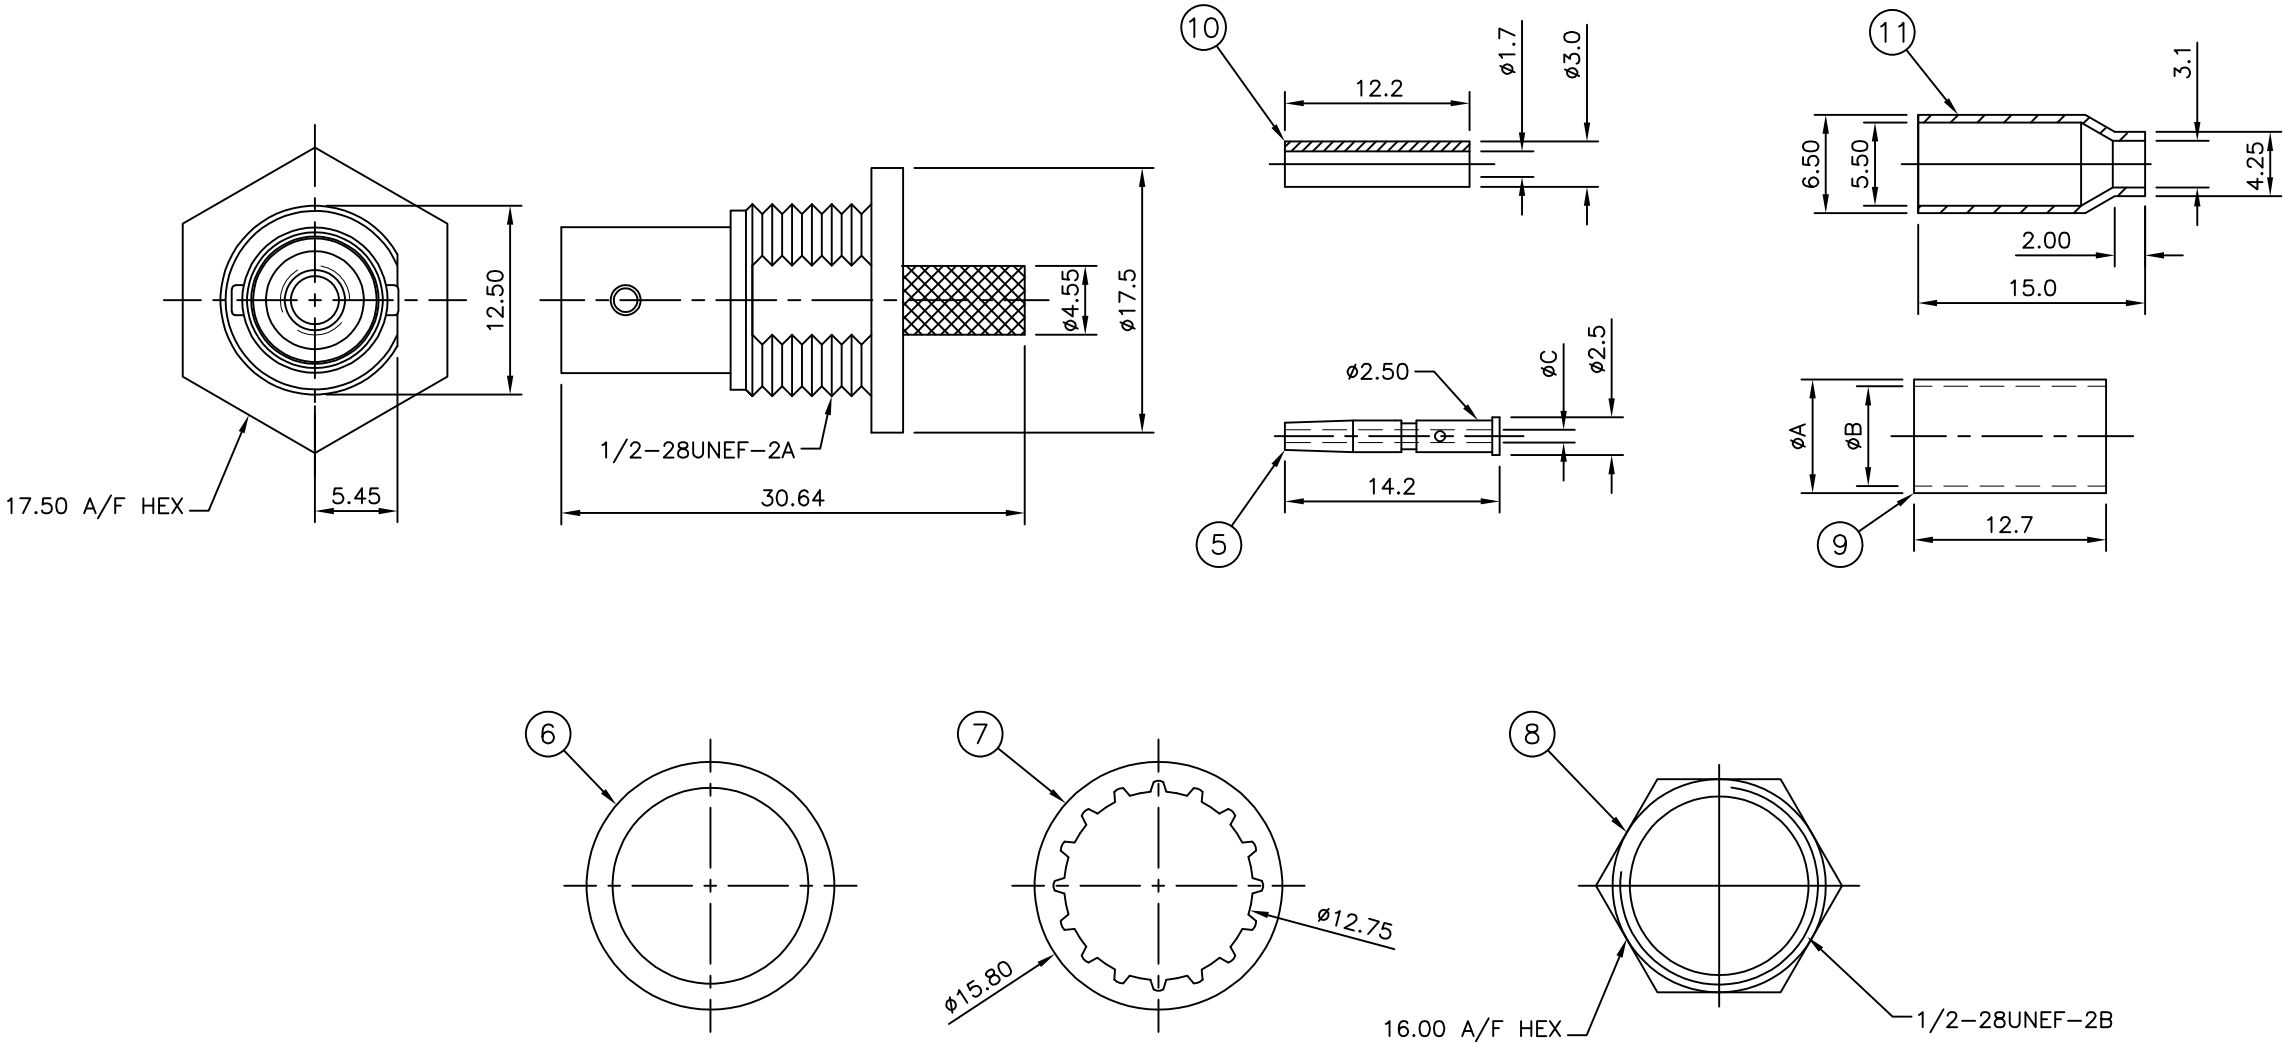
SINGLE PACK IN ACCORDANCE WITH AMP SPEC 107-3275
- 3

Au PLATING OVER Ni PLATING OVER Cu PLATING
- 4

Ni PLATING OVER Cu PLATING
5. HAND TOOL: 9-1478240-0
6. DIE SET: SEE TABLE
7. FOR TECHNICAL DATA REFER TO YOUR LOCAL TE CONNECTIVITY SALES OFFICE
8. ALL DIMENSIONS ARE NOMINAL FOR REFERENCE ONLY UNLESS OTHERWISE STATED




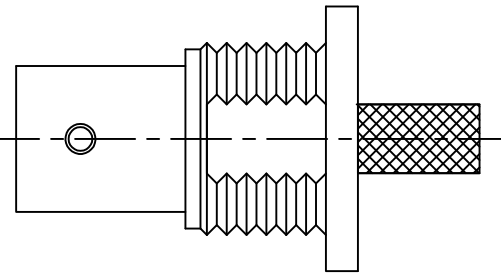


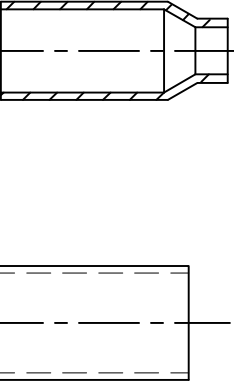
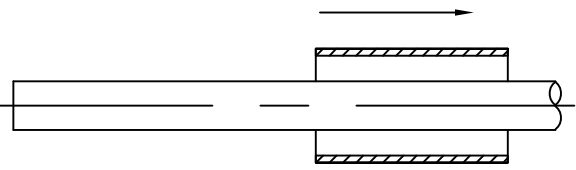
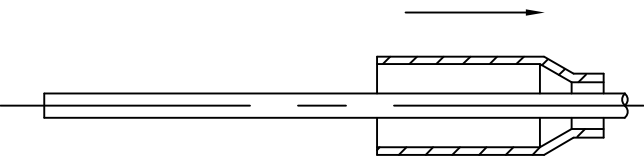
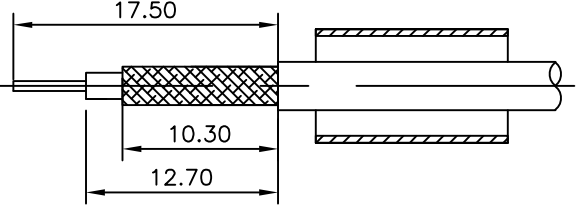
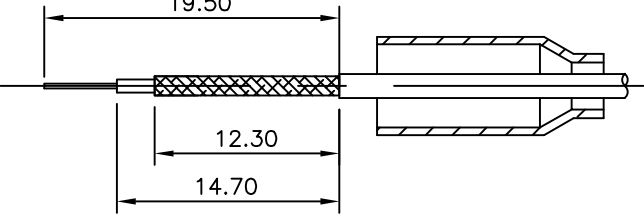
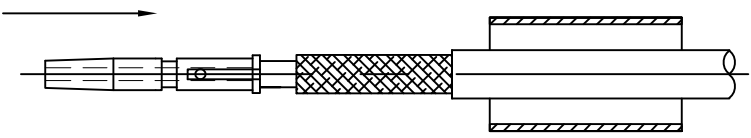

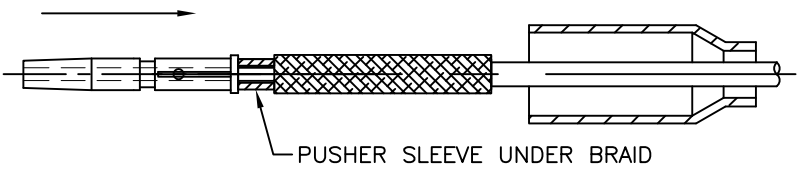

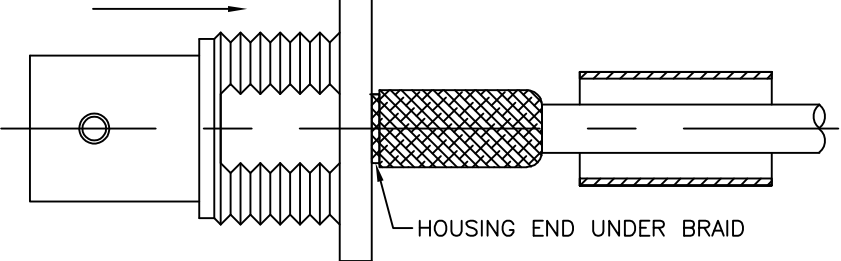
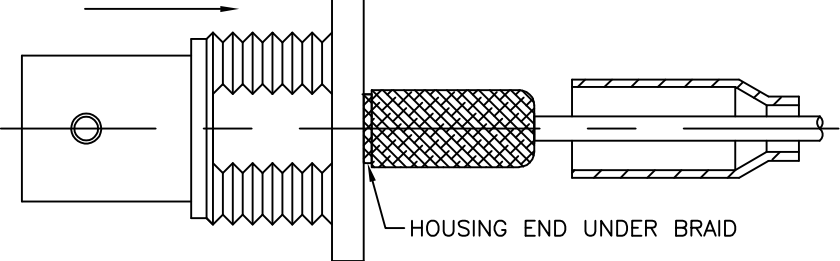
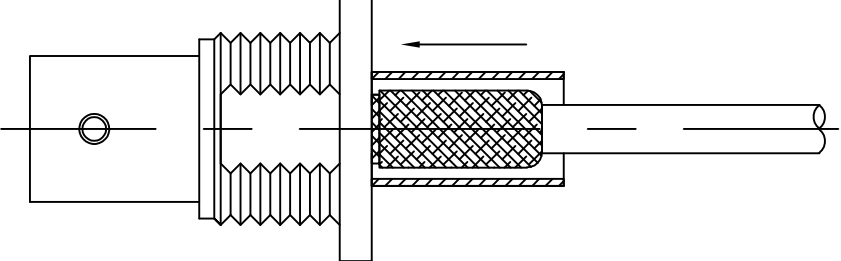

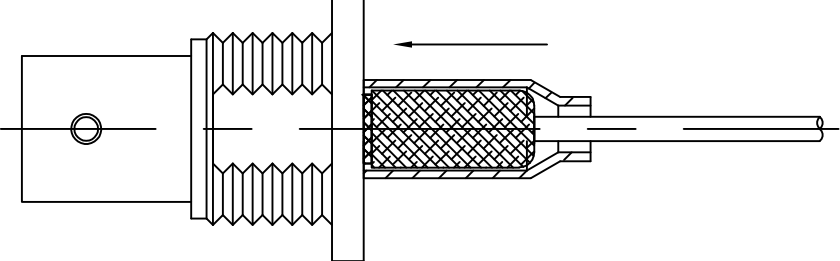

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
E	B		B1	REVISED PER ECO-11-005033	31MAR11	RK
			C	REVISED PER ECO-12-010787	11JUN12	TITAN

	6.50	5.45	3.80	0.85	6.60	7.52	9-1478242-0	RG59B/U, 62A/U, 140/U, 210/U, URM90, KX 6A, KX 25, KX 52, KX 53	5-1634516-5
	6.50	5.45	3.80	0.85	6.60	7.52	9-1478242-0	RG59B/U, 62A/U, 140/U, 210/U, URM90, KX 6A, KX 25, KX 52, KX 53	5-1634516-4
	5.60	4.60	3.20	0.40	-	-	9-1478242-0	RG179B/U, 187A/U, URM111	5-1634516-3
	5.60	4.60	3.20	0.40	-	-	9-1478242-0	RG179B/U, 187A/U, URM111	5-1634516-2
	5.60	-	-	1.10	5.40	6.40	9-1478242-0	RG58C/U, 141A/U, URM43, 76, BELDEN 9907, KX 15	5-1634516-1
	5.60	-	-	1.10	5.40	6.40	9-1478242-0	RG58C/U, 141A/U, URM43, 76, BELDEN 9907, KX 15	5-1634516-0
	F	E	D	C	B	A	DIE SET	CABLE GROUPS	PART NO.
DIMENSIONS									



		Obsolete		Obsolete					
	-	-	1	1	-	-	BRASS	4 FERRULE	11
	-	-	1	1	-	-	NYLON	PUSHER SLEEVE	10
	1	1	-	-	1	1	BRASS	4 FERRULE	9
	1	1	1	1	1	1	BRASS	4 HEX NUT	8
	1	1	1	1	1	1	PHOS BRONZE	4 LOCK WASHER	7
	1	1	1	1	1	1	RUBBER	GASKET	6
	1	1	1	1	1	1	BRASS	3 CONTACT	5
	-	-	-	-	1	1	POLYMETHYLPENTENE	INSULATOR	4
	1	1	1	1	-	-	POLYMETHYLPENTENE	INSULATOR	3
	-	-	-	-	1	1	ZINC ALLOY	4 BODY	2
	1	1	1	1	-	-	ZINC ALLOY	4 BODY	1
	5--5	5--4	5--3	5--2	5--1	5--0	MATERIAL	DESCRIPTION	ITEM
	4	4	4	4	4	4			

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	24 Feb 09	 TE Connectivity					
		CHK	24 Feb 09						
DIMENSIONS:		RITA ZUO		NAME					
MM		ANSON MA							
		APVD							
		24 Feb 09							
		BOB ZHAO		BNC BULKHEAD JACK REAR MOUNT CRIMP					
		PRODUCT SPEC							
		108-112000							
		APPLICATION SPEC							
		SEE SHEET 2							
MATERIAL		WEIGHT		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO		
SEE TABLE		-		A2	00779	C=1634516	-		
CUSTOMER DRAWING				SCALE	NTS	SHEET	1 of 2	REV	C

4		3		2		1			
THIS DRAWING IS UNPUBLISHED.		RELEASED FOR PUBLICATION		JULY , 2005.					
© COPYRIGHT 2005 By -		ALL RIGHTS RESERVED.							
LOC		DIST		REVISIONS					
E		B		P	LTR	DESCRIPTION	DATE	DWN	APVD
				-		SEE SHEET 1	-	-	-
COMPONENTS									
HEX NUT (ITEM 8)		LOCK WASHER (ITEM 7)		GASKET (ITEM 6)		MAIN BODY (ITEM 1,2,3, & 4)		CENTRE CONTACT (ITEM 5)	
									
								PUSHER SLEEVE (ITEM 10)	
									
								CRIMP FERRULES (ITEM 9 & 11)	
									
ASSEMBLY INSTRUCTION									
CABLES: RG59B/U, 62A/U, 140/U, 210/U, URM90, KX 6A, KX 25, KX 52, KX 53, RG58C/U, 141A/U, URM43, 76, BELDEN 9907, KX 15					CABLES: RG179B/U, 187A/U, URM111				
STEP 1 1. SLIDE METAL CRIMP FERRULE OVER CABLE					STEP 1 1. SLIDE METAL CRIMP FERRULE OVER CABLE				
									
STEP 2 1. STRIP CABLE TO DIMENSIONS AS SHOWN					STEP 2 1. STRIP CABLE TO DIMENSIONS AS SHOWN				
									
STEP 3 1. FIT CONTACT OVER CENTRE CONDUCTOR TO BUTT AGAINST DIELECTRIC. 2. CRIMP USING TOOL AS NOTES ON PAGE 1.					STEP 3 1. SLIDE ITEM 10 PUSHER SLEEVE OVER DIELECTRIC BEFORE FITTING THE CONTACT. 2. FIT CONTACT OVER CENTRE CONDUCTOR TO BUTT AGAINST DIELECTRIC. 3. CRIMP USING TOOL AS NOTES ON PAGE 1.				
 RECOMMENDED CENTRE CONTACT A/F HEX 					 RECOMMENDED CENTRE CONTACT A/F HEX 				
STEP 4 1. PRESS SUB-ASSEMBLY INTO BODY, UNTIL CONTACT IS FULLY LOCATED BY AN AUDIBLE CLICK. 2. ENSURE THAT KNURLED HOUSING INSERTS BETWEEN THE DIELECTRIC AND CABLE BRAID.					STEP 4 1. PRESS SUB-ASSEMBLY INTO BODY, UNTIL CONTACT IS FULLY LOCATED BY AN AUDIBLE CLICK. 2. ENSURE THAT KNURLED HOUSING INSERTS BETWEEN THE PUSHER SLEEVE AND CABLE BRAID.				
 HOUSING END UNDER BRAID					 HOUSING END UNDER BRAID				
STEP 5 1. SLIDE CRIMP FERRULE ALONG THE CABLE UNTIL IT BUTTS AGAINST THE HOUSING BODY. 2. CRIMP USING TOOL AS NOTED ON PAGE 1. 3. CRIMP DIMENSION X IS:- RG59B (SEE PAGE 1 FOR FULL CABLE LIST) = 6.50 RG58C/U (SEE PAGE 1 FOR FULL CABLE LIST) = 5.60					STEP 5 1. SLIDE CRIMP FERRULE ALONG THE CABLE UNTIL IT BUTTS AGAINST THE BODY HOUSING. 2. CRIMP USING TOOL AS NOTED ON PAGE 1. 3. CRIMP DIMENSION AS SHOWN.				
 RECOMMENDED CRIMP SLEEVE A/F HEX 					 RECOMMENDED CRIMP SLEEVE A/F HEX 				
THIS DRAWING IS A CONTROLLED DOCUMENT.					DWN RITA ZUO 24 Feb 09 CHK ANSON MA 24 Feb 09 APVD BOB ZHAO 24 Feb 09 PRODUCT SPEC 108-112000 APPLICATION SPEC SHEET 2 WEIGHT - CUSTOMER DRAWING				
DIMENSIONS: MM		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 0.5 1 PLC ± 0.3 2 PLC ± 0.2 3 PLC ± - 4 PLC ± - ANGLES ± - FINISH -			NAME BNC BULKHEAD JACK REAR MOUNT CRIMP SIZE A2 CAGE CODE 00779 DRAWING NO C=1634516 RESTRICTED TO -				
MATERIAL SEE TABLE					SCALE NTS SHEET 2 OF 2 REV B1				

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru