

UM 25-D 9SUB/S/FRONT/Q

Order No.: 2959573

The illustration shows the version UM 25-D 9SUB/B/FRONT/Q




<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2959573>

VARIOFACE SLIM LINE, with screw connection and D-subminiature pin strip, for assembly at a right angle on NS 35/7.5, 9 positions



Commercial data

GTIN (EAN)	 4 017918 086220
sales group	I011
Pack	1 pcs.
Customs tariff	85369010
Catalog page information	Page 287 (IF-2009)

Product notes

WEEE/RoHS-compliant since:
11/30/2006



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General data

Nominal voltage U_N	125 V AC/DC
Max. current carrying capacity per branch	2.5 A
	1.5 A (with even load on all branches)
Number of positions	9

Width	25 mm
Height	117 mm
Depth	45 mm
Ambient temperature (operation)	-10 °C ... 50 °C
Ambient temperature (storage/transport)	-10 °C ... 70 °C
Test voltage	800 V (50 Hz, 1 min.)
Mounting position	Any
Standards/regulations	IEC 60664
	IEC 60664 A
	DIN VDE 0110
	DIN VDE 0160 (in parts)
Pollution degree	2
Surge voltage category	II

Connection data

Connection 1	PCB connection
Connection in acc. with standard	IEC / EN
Type of connection	Screw connection
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	4 mm ²
Conductor cross section stranded min.	0.2 mm ²
Conductor cross section stranded max.	2.5 mm ²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12
Stripping length	8 mm
Screw thread	M3
Connection 2	D-SUB connection
Type of connection	Pluggable

Certificates / Approvals



Certification

GOST

Accessories		
Item	Designation	Description
Cable/conductor		
2302421	CABLE D-SUB-B-B-S/.../.../...	Shielded round cable, assembled with two D-SUB female connectors, variable cable length
2302340	CABLE D-SUB-S/.../.../...	Shielded round cable, assembled with one D-SUB male and one female connector, variable cable length
2299987	CABLE-D 9SUB/B/S/ 50/ KONFEK/S	Round shielded cable set, with 9-pos. D-SUB female and male connectors, cable length: 0.5 m
2299990	CABLE-D 9SUB/B/S/100/ KONFEK/S	Round shielded cable set, with 9-pos. D-SUB female and male connectors, cable length: 1 m
2300009	CABLE-D 9SUB/B/S/150/ KONFEK/S	Round shielded cable set, with 9-pos. D-SUB female and male connectors, cable length: 1.5 m
2302010	CABLE-D 9SUB/B/S/200/ KONFEK/S	Round shielded cable set, with 9-pos. D-SUB female and male connectors, cable length: 2 m
2302023	CABLE-D 9SUB/B/S/300/ KONFEK/S	Round shielded cable set, with 9-pos. D-SUB female and male connectors, cable length: 3 m
2302036	CABLE-D 9SUB/B/S/400/ KONFEK/S	Round shielded cable set, with 9-pos. D-SUB female and male connectors, cable length: 4 m
2302049	CABLE-D 9SUB/B/S/600/ KONFEK/S	Round shielded cable set, with 9-pos. D-SUB female and male connectors, cable length: 6 m
2926014	CABLE-D- 9SUB/F/OE/0,25/ S/0,5M	Shielded cable with a 9-pos. D-SUB female connector and one open end. The individual wires are labeled 1 to 9 and fitted with ferrules. The braided shield is routed to a separate cable end. Cable length: 0.5 m.
2926027	CABLE-D- 9SUB/F/OE/0,25/ S/1,0M	Shielded cable with a 9-pos. D-SUB female connector and one open end. The individual wires are labeled 1 to 9 and fitted with ferrules. The braided shield is routed to a separate cable end. Cable length: 1 m.
2926030	CABLE-D- 9SUB/F/OE/0,25/ S/1,5M	Shielded cable with a 9-pos. D-SUB female connector and one open end. The individual wires are labeled 1 to 9 and fitted with ferrules. The braided shield is routed to a separate cable end. Cable length: 1.5 m.
2926043	CABLE-D- 9SUB/F/OE/0,25/ S/2,0M	Shielded cable with a 9-pos. D-SUB female connector and one open end. The individual wires are labeled 1 to 9 and fitted with ferrules. The braided shield is routed to a separate cable end. Cable length: 2 m.
2926056	CABLE-D- 9SUB/F/OE/0,25/ S/3,0M	Shielded cable with a 9-pos. D-SUB female connector and one open end. The individual wires are labeled 1 to 9 and fitted with ferrules. The braided shield is routed to a separate cable end. Cable length: 3 m.
2926069	CABLE-D- 9SUB/F/OE/0,25/ S/4,0M	Shielded cable with a 9-pos. D-SUB female connector and one open end. The individual wires are labeled 1 to 9 and fitted with ferrules. The braided shield is routed to a separate cable end. Cable length: 4 m.


2926072	CABLE-D- 9SUB/F/OE/0,25/S/6,0M	Shielded cable with a 9-pos. D-SUB female connector and one open end. The individual wires are labeled 1 to 9 and fitted with ferrules. The braided shield is routed to a separate cable end. Cable length: 6 m.
---------	--------------------------------	--

General

2900903	CABLE-D- 9SUB-F-OE-0,25-S/...	Shielded cable with a 9-pos. D-SUB female connector and one open end. The individual wires are labeled 1 to 9 and fitted with ferrules. The braided shield is routed to a separate cable end. Cable length: variable.
---------	-------------------------------	---

Diagrams/Drawings

Circuit diagram

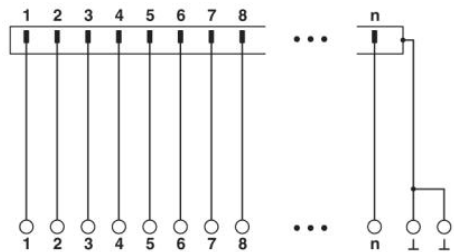

Address

PHOENIX CONTACT Deutschland GmbH
Flachmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact
Technical modifications reserved;

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru