

# SK6812

## Technical Data Sheet

### Product Overview

SK6812 is a set of smart control circuit and a light emitting circuit in one of the controlled LED source. The outer type is the same with a 5050LED chip, each element is a pixel. Pixels contained within the intelligent digital interface data latch signal shaping amplification circuit, power supply circuit, a built-in constant current circuit, high precision RC oscillator, the output is driven by the patented PWM technology, effectively guarantee the pixels in the color of the light high consistency.

Data protocol using unipolar NRZ communication mode, the pixel is reset after the end of DIN, accept the data transmitted from the controller to the 24bit, the first to send data by the first pixel to pixel extraction, internal data latch, the remaining data after the internal plastic the processing circuit after shaping amplification through the DO port output began to turn to the next cascade of pixels, each pixel through a transmission signal, reduce. Pixel using automatic shaping forwarding technology, makes the number of cascade without signal transmission limit of the pixel, only limited signal transmission speed. The

LED has a low driving voltage, environmental protection and energy saving, high brightness, scattering angle, good consistency, low power, long life and so on. The control circuit is integrated in the LED above, more simple circuit, small volume, easy installation.

### Main Application Field:

- Full color LED string light, LED full color module, LED super hard and soft lights, LED guardrail tube, LED appearance / scene lighting
- LED point light, LED pixel screen, LED shaped screen, a variety of electronic products, electrical equipment etc..


# SK6812

## Technical Data Sheet

### Description:

- Top SMD internal integrated high quality external control line serial cascade constant current IC;
- control circuit and the RGB chip in SMD 5050 components, to form a complete control of pixel, color mixing uniformity and consistency;
- built-in data shaping circuit, a pixel signal is received after wave shaping and output waveform distortion will not guarantee a line;
- The built-in power on reset and reset circuit, the power does not work;
- gray level adjusting circuit (256 level gray scale adjustable);
- red drive special treatment, color balance;
- line data transmission;
- plastic forward strengthening technology, the transmission distance between two points over 10M;
- data transmission frequency up to 800Kbps, when the refresh rate of 30 frames per second, a cascade of not less than 1024;
- built-in powerpolarity protection module, powerpolarity will not damage.


### Mechanical Product Size (unit mm):

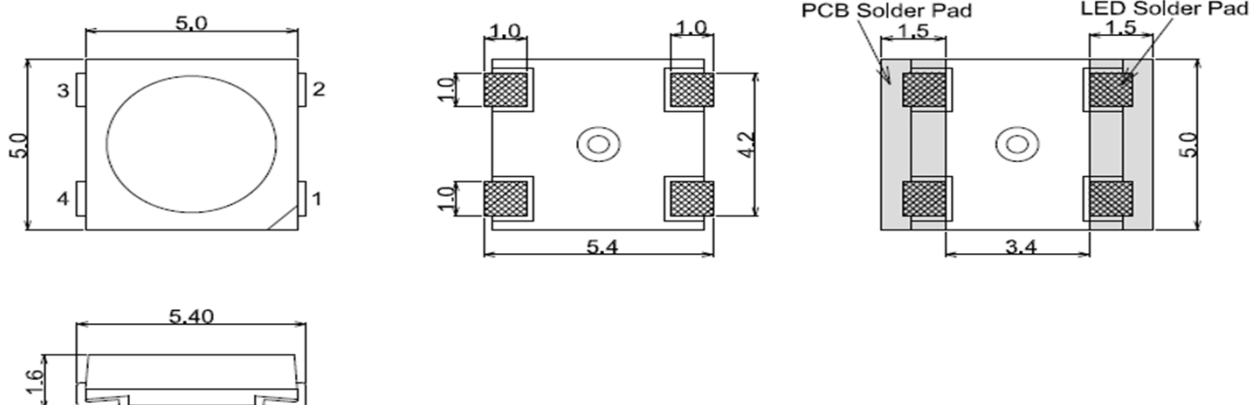

# SK6812

## Technical Data Sheet

### Mechanical Size and Pin Map (unit mm):

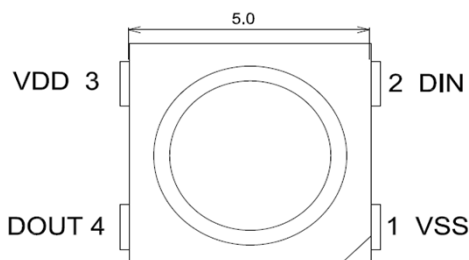

### Pin Function:

| Item | Symbol | Pin Name    | Function description                      |
|------|--------|-------------|-------------------------------------------|
| 1    | VSS    | Ground      | The signal and power supply and grounding |
| 2    | DIN    | Data Input  | control signal input data                 |
| 3    | VDD    | Power       | power supply pin                          |
| 4    | DOUT   | Data Output | control signal output data                |

### The electrical parameters (limit parameters, Ta=25 C, VSS=0V):

| Parameter           | Symbol    | Range        | Unit |
|---------------------|-----------|--------------|------|
| Input voltage       | $V_{IN}$  | +5           | V    |
| Logic input voltage | $V_I$     | -0.5~VDD+5.5 | V    |
| Working temperature | Topt      | -40~+85      | °C   |
| Storage temperature | Tstg      | -50~+150     | °C   |
| EST pressure        | $V_{ESD}$ | 4K           | V    |

# SK6812

## Technical Data Sheet

The electrical parameters (such as no special instructions, TA=-20 ~ +70 ~ 5.5V C, VDD=4.5, VSS=0V):

| Parmeter                        | Symbol  | Min | Typical | Max | Unit | Test conditions                               |
|---------------------------------|---------|-----|---------|-----|------|-----------------------------------------------|
| The chip supply voltage         | VDD     | --- | 5.2     |     | V    | ---                                           |
| R/G/B port pressure             | VDS,MAX | --- | ---     | 26  | V    | ---                                           |
| DOUT drive capability           | IDOH    | --- | 49      | --- | mA   | DOUT conect ground, the maximum drive current |
|                                 | IDOL    | --- | -50     | --- | mA   | DOUT conect +, the largest current            |
| The signal input flip threshold | VIH     | --- | 3.4     | --- |      | VDD=5.0V                                      |
|                                 | VIL     | --- | 1.6     | --- |      |                                               |
| The frequency of PWM            | FPWM    | --- | 1.2     | --- | KHZ  | ---                                           |
| Static power consumption        | IDD     | --- | 1       | --- | mA   | ---                                           |


The dynamic parameters (Ta=25 C):

| Parameter                      | Symbol           | Min | Typical | Max | Unit | Test conditions                |
|--------------------------------|------------------|-----|---------|-----|------|--------------------------------|
| The speed of data transmission | fDIN             | --- | 800     | --- | KHZ  | The duty ratio of 67% (data 1) |
| DOUT transmission delay        | T <sub>PLZ</sub> | --- | ---     | 500 | ns   | DIN→DOUT                       |
|                                | T <sub>PLZ</sub> | --- | ---     | 500 | ns   |                                |

# LED COLOR

# SK6812

## Technical Data Sheet

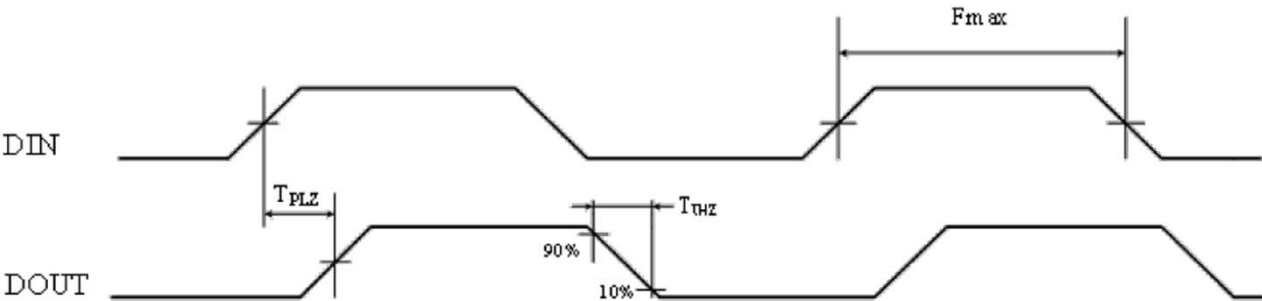

### RGB chip characteristic parameters:

| Color | Wavelength(nm) | Luminous intensity(mcd) | Working voltage(v) |
|-------|----------------|-------------------------|--------------------|
| Red   | 620-625        | 700-1000                | 2.0-2.2            |
| Green | 522.5-525      | 1500-2200               | 3.0-3.3            |
| Blue  | 467.5-470      | 700-1000                | 3.0-3.3            |

### The data transmission time (TH+TL=1.25μs±600ns):

|      |                            |       |         |
|------|----------------------------|-------|---------|
| T0H  | 0 code, high level time    | 0.3μs | ±0.15μs |
| T1H  | 1 code, high level time    | 0.6μs | ±0.15μs |
| T0L  | 0 code, low level time     | 0.9μs | ±0.15μs |
| T1L  | 1 code, low level time     | 0.6μs | ±0.15μs |
| Trst | Reset code, low level time | 80μs  |         |

# SK6812


## Technical Data Sheet

### Timing waveform:


#### Input code:



#### Connection mode:

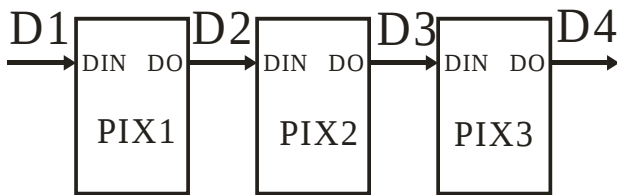

### The method of data transmission:

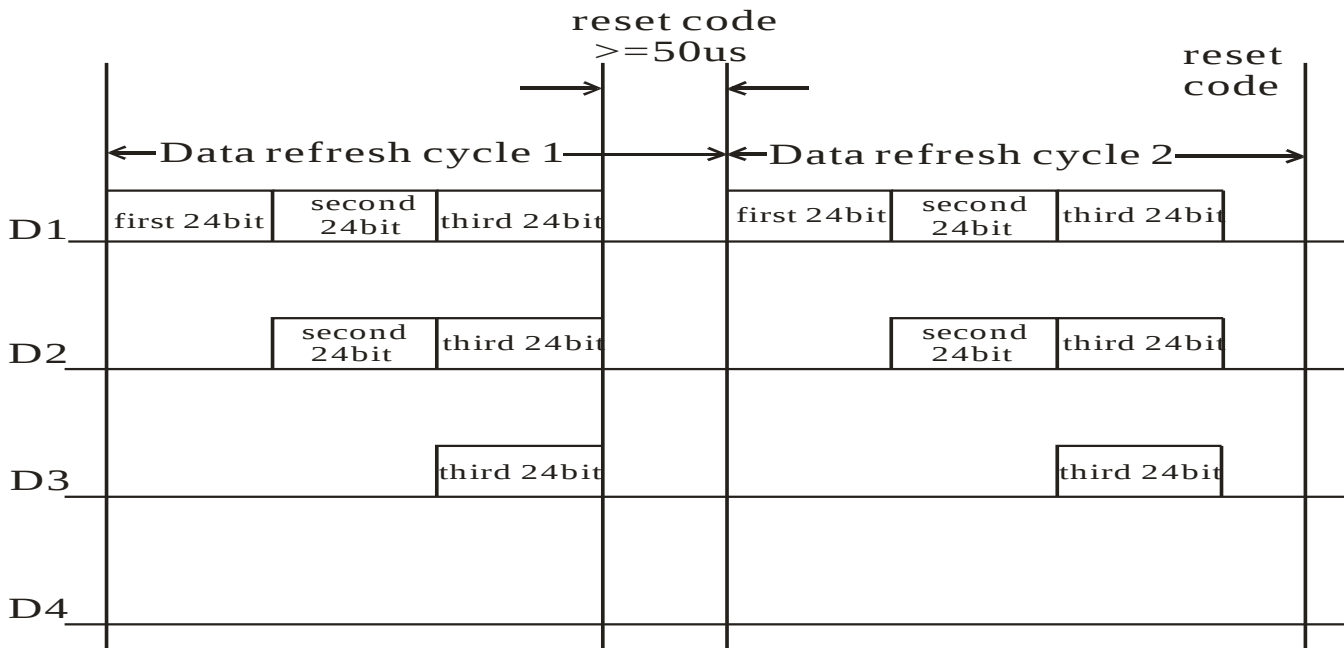

Note: the D1 sends data for MCU, D2, D3, D4 for data forwarding automatic shaping cascade circuit.

### The data structure of 24bit:

|    |    |    |    |    |    |    |    |    |    |    |    |
|----|----|----|----|----|----|----|----|----|----|----|----|
| G7 | G6 | G5 | G4 | G3 | G2 | G1 | G0 | R7 | R6 | R5 | R4 |
| R3 | R2 | R1 | R0 | B7 | B6 | B5 | B4 | B3 | B2 | B1 | B0 |


Note: high starting, in order to send data (G7 - G6 - ..... ..B0)

# LED COLOR

# SK6812

## Technical Data Sheet

### The typical application circuit:

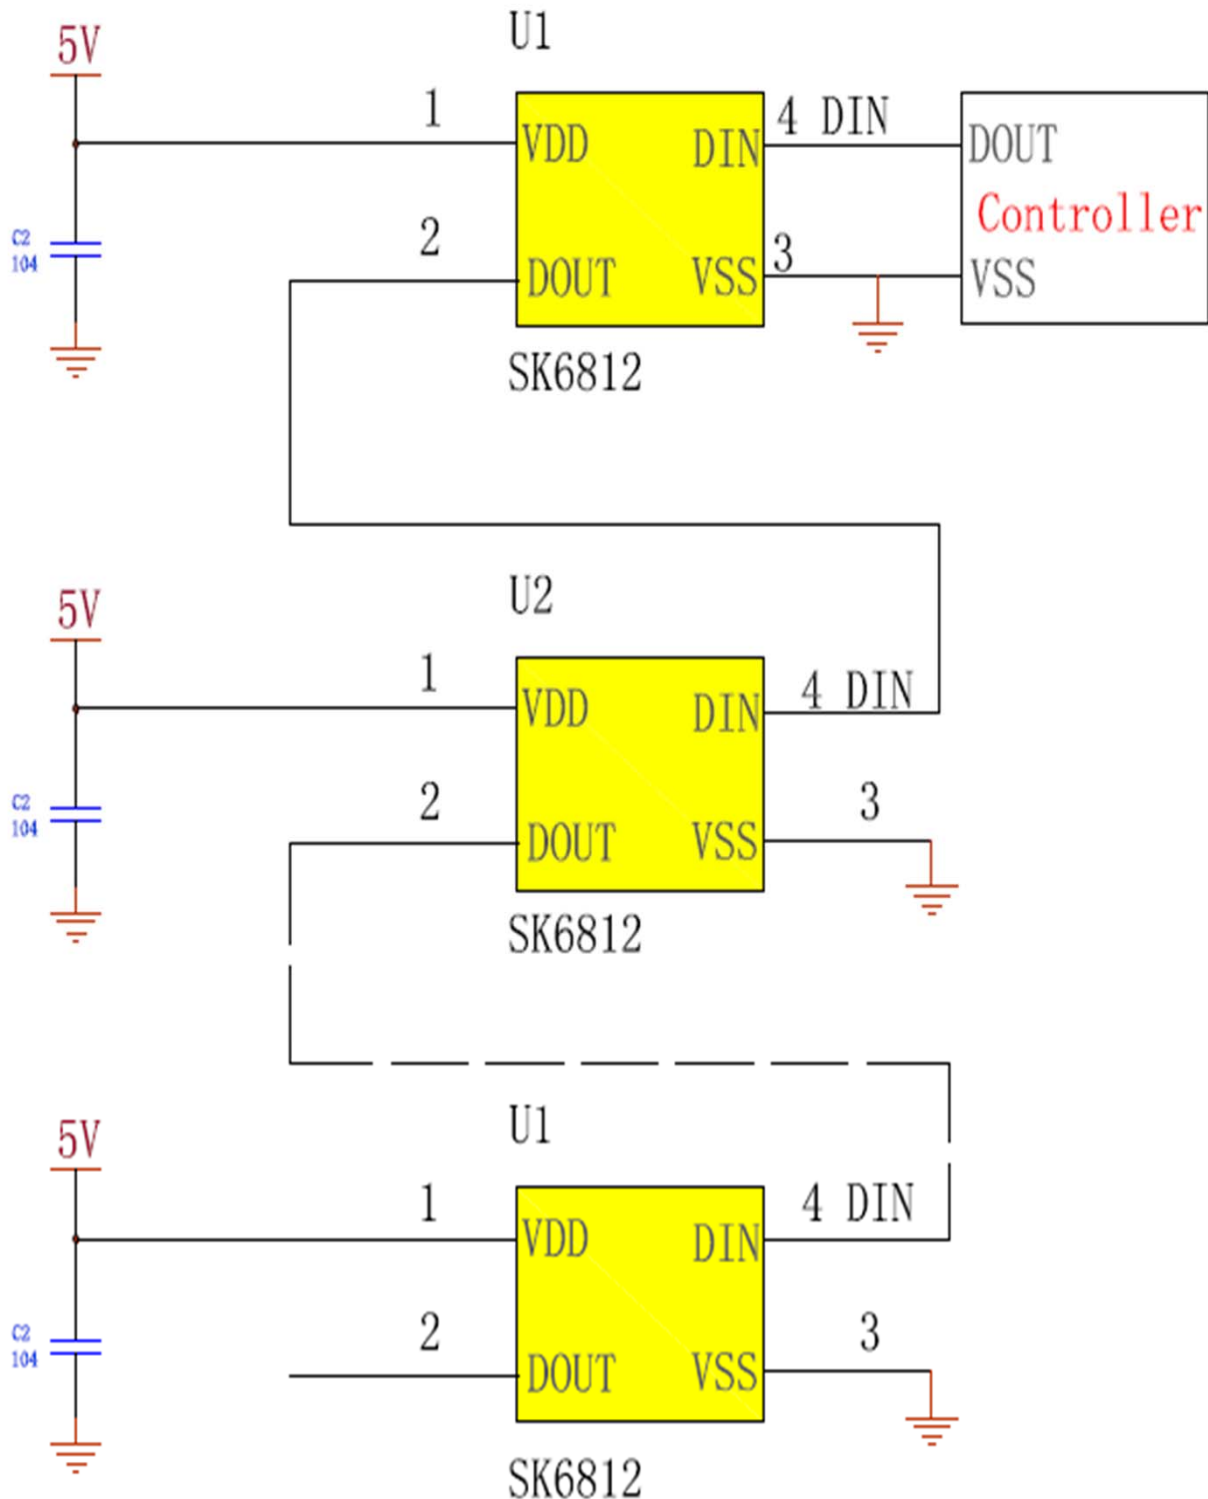

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)