



- 1.5 A RMS
- Glass Passivated Wafer
- 400 V to 600 V Off-State Voltage
- Max I_{GT} of 10 mA
- Package Options

PACKAGE	PACKING	PART # SUFFIX
LP	Bulk	(None)
LP with fomed leads	Tape and Reel	R

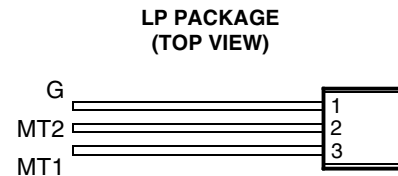

MDC2AA

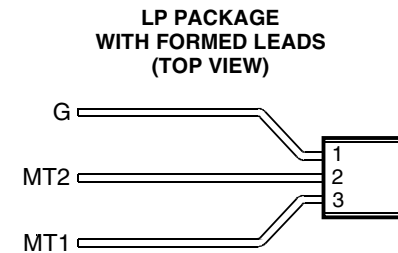

MDC2AB

absolute maximum ratings over operating case temperature (unless otherwise noted)

RATING		SYMBOL	VALUE	UNIT
Repetitive peak off-state voltage (see Note 1)	TICP206D	V_{DRM}	400	V
	TICP206M		600	
Full-cycle RMS on-state current at (or below) 85°C case temperature (see Note 2)		$I_T(RMS)$	1.5	A
Peak on-state surge current full-sine-wave at (or below) 25°C case temperature (see Note 3)		I_{TSM}	10	A
Peak on-state surge current half-sine-wave at (or below) 25°C case temperature (see Note 4)		I_{TSM}	12	A
Peak gate current		I_{GM}	±0.2	A
Average gate power dissipation at (or below) 85°C case temperature (see Note 5)		$P_{G(AV)}$	0.3	W
Operating case temperature range		T_C	-40 to +110	°C
Storage temperature range		T_{stg}	-40 to +125	°C
Lead temperature 1.6 mm from case for 10 seconds		T_L	230	°C

- NOTES: 1. These values apply bidirectionally for any value of resistance between the gate and Main Terminal 1.
 2. This value applies for 50-Hz full-sine-wave operation with resistive load. Above 85°C derate linearly to 110°C case temperature at the rate of 60 mA/°C.
 3. This value applies for one 50-Hz full-sine-wave when the device is operating at (or below) the rated value of on-state current. Surge may be repeated after the device has returned to original thermal equilibrium. During the surge, gate control may be lost.
 4. This value applies for one 50-Hz half-sine-wave when the device is operating at (or below) the rated value of on-state current. Surge may be repeated after the device has returned to original thermal equilibrium. During the surge, gate control may be lost.
 5. This value applies for a maximum averaging time of 20 ms.

electrical characteristics at 25°C case temperature (unless otherwise noted)

PARAMETER	TEST CONDITIONS		MIN	TYP	MAX	UNIT
I_{DRM} Repetitive peak off-state current	$V_D = \text{rated } V_{DRM}$	$I_G = 0$			±20	μA
I_{GT} Gate trigger current	$V_{supply} = +12 V†$	$R_L = 10 \Omega$			8	mA
	$V_{supply} = +12 V†$	$R_L = 10 \Omega$			-8	
	$V_{supply} = -12 V†$	$R_L = 10 \Omega$			-8	
	$V_{supply} = -12 V†$	$R_L = 10 \Omega$			10	
V_{GT} Gate trigger voltage	$V_{supply} = +12 V†$	$R_L = 10 \Omega$			2.5	V
	$V_{supply} = +12 V†$	$R_L = 10 \Omega$			-2.5	
	$V_{supply} = -12 V†$	$R_L = 10 \Omega$			-2.5	
	$V_{supply} = -12 V†$	$R_L = 10 \Omega$			2.5	

† All voltages are with respect to Main Terminal 1.

PRODUCT INFORMATION

MARCH 1988 - REVISED SEPTEMBER 2002
 Specifications are subject to change without notice.

electrical characteristics at 25°C case temperature (unless otherwise noted) (continued)

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
V_T On-state voltage	$I_T = \pm 1$ A $I_G = 50$ mA (see Note 6)			± 2.2	V
I_H Holding current	$V_{supply} = +12$ V† $I_G = 0$ Init' $I_{TM} = 100$ mA			30	mA
	$V_{supply} = -12$ V† $I_G = 0$ Init' $I_{TM} = -100$ mA			-30	
I_L Latching current	$V_{supply} = +12$ V† $V_{supply} = -12$ V† (see Note 7)			40	mA
				-40	

† All voltages are with respect to Main Terminal 1.

NOTES: 6. This parameter must be measured using pulse techniques, $t_p \leq 1$ ms, duty cycle ≤ 2 %. Voltage-sensing contacts separate from the current carrying contacts are located within 3.2 mm from the device body.

7. The triacs are triggered by a 15-V (open circuit amplitude) pulse supplied by a generator with the following characteristics:
 $R_G = 100 \Omega$, $t_{p(g)} = 20 \mu s$, $t_r = \leq 15$ ns, $f = 1$ kHz.

TYPICAL CHARACTERISTICS

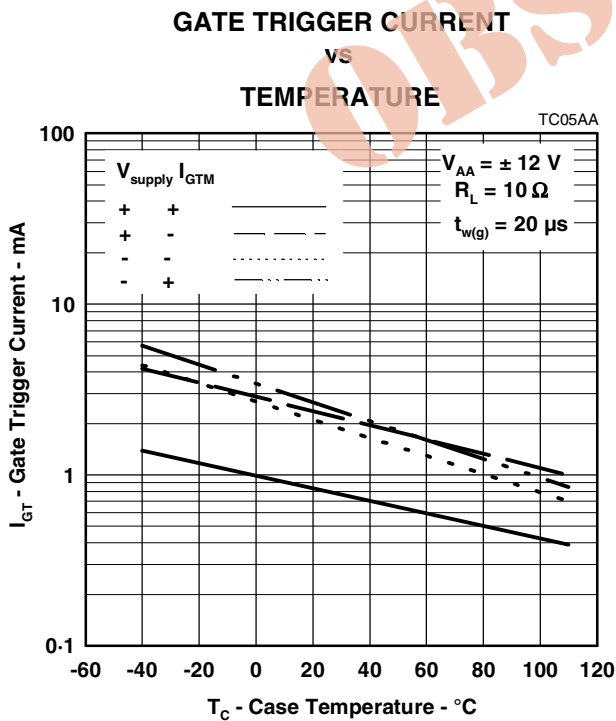


Figure 1.

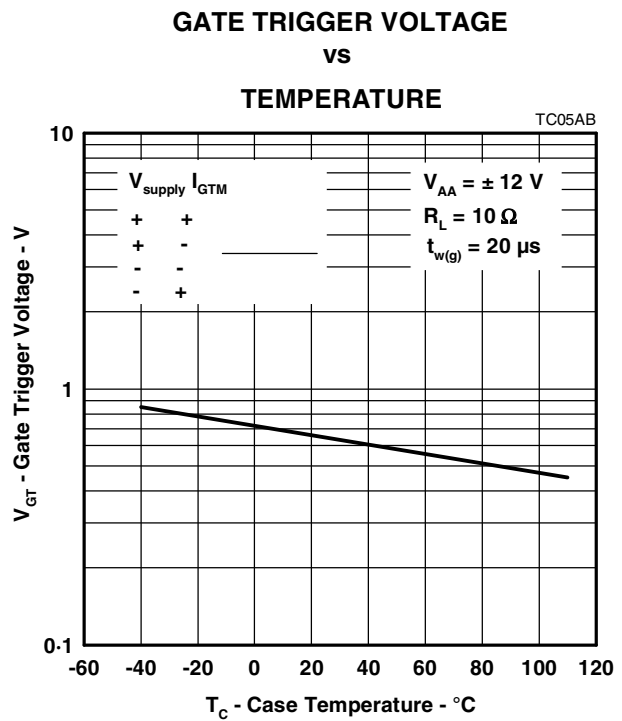


Figure 2.

PRODUCT INFORMATION

MARCH 1988 - REVISED SEPTEMBER 2002
Specifications are subject to change without notice.

TYPICAL CHARACTERISTICS

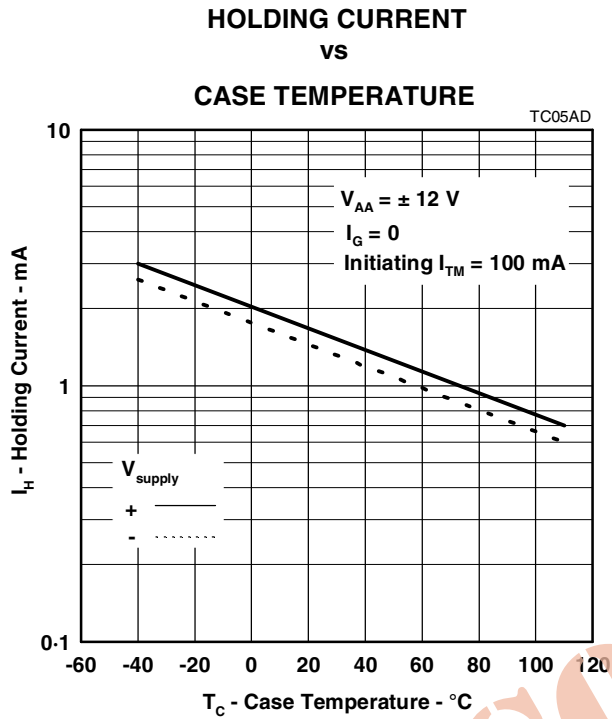


Figure 3.

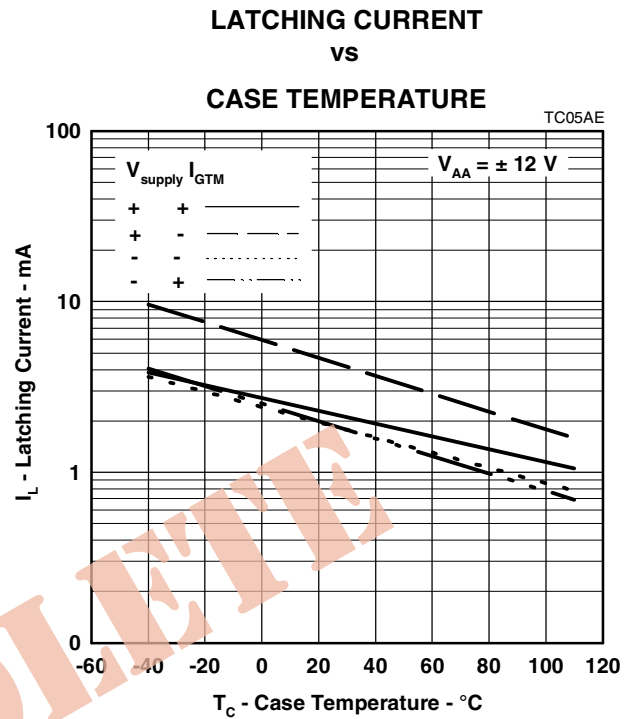


Figure 4.

OBSOLETE

PRODUCT INFORMATION

MARCH 1988 - REVISED SEPTEMBER 2002
Specifications are subject to change without notice.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru