


5 AMP LOW DROPOUT POSITIVE ADJUSTABLE REGULATOR APPROVED TO DESC DRAWING 5962-89521

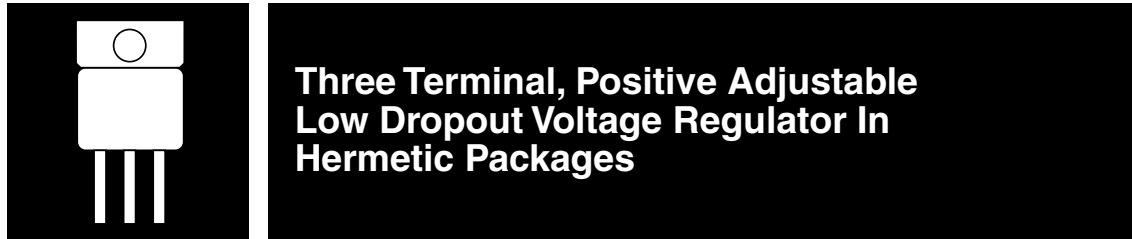

**Three Terminal, Positive Adjustable
Low Dropout Voltage Regulator In
Hermetic Packages**

FEATURES

- Similar To Industry Standard LT1084
- Approved To DESC Standardized Military Drawing Number 5962-89521
- Adjustable Output Voltage
- Built In Thermal Overload Protection
- Short Circuit Current Limiting
- Maximum Output Voltage Tolerance is Guaranteed To $\pm 1\%$
- Guaranteed Dropout Voltage At Multiple Current Levels
- TO-258 Available in Isolated and Non-Isolated Packages

DESCRIPTION

This three terminal positive adjustable voltage regulator is designed to provide 5A with higher efficiency than conventional voltage regulators. This device is designed to operate down to 1 Volt input to output differential and the dropout voltage is fully specified as a function of load current. Supplied in easy-to-use hermetic TO-258 and TO-3 packages, this device is ideally suited for Military applications where small size and high reliability is required.

ABSOLUTE MAXIMUM RATINGS @ 25°C

Power Dissipation (P_d)	Internally Limited
Input - Output Voltage Differential	35 V
Operating Junction Temperature Range	- 55°C to + 150°C
Storage Temperature Range	- 65°C to + 150°C
Lead Temperature (Soldering 10 seconds)	300°C
Thermal Resistance:	
θ_{JC} (TO-258 Isolated)	3.0°C/W
θ_{JC} (TO-258 Non-Isolated)	2.3°C/W
θ_{JC} (TO-3)	3.0°C/W
Maximum Output Current	5.0 A
Recommended Operating Conditions:	
Output Voltage Range	3.3V to 15 V
Ambient Operating Temperature Range (T_A)	- 55°C to + 125°C
Input Voltage Range	5V to 25 V

3.3

OM1840SCM OM1840NCM OM1840NKM


ELECTRICAL CHARACTERISTICS $-55^{\circ}\text{C} \leq T_A \leq +125^{\circ}\text{C}$ (unless otherwise specified)

Parameter	Symbol	Test Conditions	Min.	Max.	Unit
Reference Voltage	V_{REF}	$ V_{\text{IN}} - V_{\text{OUT}} = 3.0 \text{ V}$, $I_{\text{OUT}} = 10 \text{ mA}$, $T_A = 25^{\circ}\text{C}$	1.238	1.262	V
		$1.5 \text{ V} \leq V_{\text{IN}} - V_{\text{OUT}} \leq 25 \text{ V}$, $I_{\text{OUT}} = 10 \text{ mA}$, $I_{\text{FL}} = 3.0 \text{ A}$	• 1.225	1.270	V
Line Regulation (Note 1)	$\frac{\Delta V_{\text{OUT}}}{\Delta V_{\text{IN}}}$	$1.5 \text{ V} \leq V_{\text{IN}} - V_{\text{OUT}} \leq 15 \text{ V}$, $I_{\text{OUT}} = 10 \text{ mA}$, $T_A = 25^{\circ}\text{C}$		0.2	%
		$15 \text{ V} \leq V_{\text{IN}} - V_{\text{OUT}} \leq 35 \text{ V}$, $I_{\text{OUT}} = 10 \text{ mA}$	•	0.5	%
Load Regulation (Note 1)	$\frac{\Delta V_{\text{OUT}}}{\Delta I_{\text{OUT}}}$	$ V_{\text{IN}} - V_{\text{OUT}} = 3.0 \text{ V}$, $T_A = 25^{\circ}\text{C}$ $I_{\text{OUT}} = 10 \text{ mA}$, $I_{\text{FL}} = 3.0 \text{ A}$		0.3	%
			•	0.4	%
Dropout Voltage	V_{DO}	$I_{\text{FL}} = 3.0 \text{ A}$, $\Delta V_{\text{REF}} = 1\%$	•	1.5	V
Thermal Regulation	-	30 ms pulse, $T_A = +25^{\circ}\text{C}$		0.015	%/W
Ripple Rejection	$\frac{\Delta V_{\text{IN}}}{\Delta V_{\text{OUT}}}$	$f = 120 \text{ Hz}$, $C_{\text{Adj}} = 25 \mu\text{F}$, $C_{\text{OUT}} = 25 \mu\text{F}$ (tantalum), $I_{\text{FL}} = 3.0 \text{ A}$, $ V_{\text{IN}} - V_{\text{OUT}} = 3.0 \text{ V}$	• 60		dB
Adjust Pin Current	I_{Adj}	$1.5 \text{ V} \leq V_{\text{IN}} - V_{\text{OUT}} \leq 25 \text{ V}$, $I_{\text{OUT}} = 10 \text{ mA}$, $I_{\text{FL}} = 3.0 \text{ A}$	•	120	μA
Adjust Pin Current Change	ΔI_{Adj}	$1.5 \text{ V} \leq V_{\text{IN}} - V_{\text{OUT}} \leq 25 \text{ V}$, $10 \text{ mA} \leq I_{\text{OUT}} \leq 3.0 \text{ A}$	•	5.0	μA
Minimum Load Current	I_{Min}	$ V_{\text{IN}} - V_{\text{OUT}} = 25 \text{ V}$	•	10	mA
Current Limit	I_{Lim}	$ V_{\text{IN}} - V_{\text{OUT}} \leq 5.0 \text{ V}$	• 5.5		A
		$ V_{\text{IN}} - V_{\text{OUT}} = 25 \text{ V}$	• 0.3		A
Temperature Stability (Note 2)	$\frac{\Delta V_{\text{OUT}}}{\Delta T}$	$-55^{\circ}\text{C} \leq T_J \leq +125^{\circ}\text{C}$	•	1.5	%
Long Term Stability (Note 2)	$\frac{\Delta V_{\text{OUT}}}{\Delta T}$	$T_A = +125^{\circ}\text{C}$, $t = 1000 \text{ hrs}$		1.0	%

Notes:


1. Line and Load Regulation are measured at a constant junction temperature using a low duty cycle pulse technique. Although power dissipation is internally limited, regulation is guaranteed up to the maximum power dissipation of 45 W. Power dissipation is determined by the input/output differential voltage and the output current. Guaranteed maximum power dissipation will not be available over the full input/output voltage range.
2. Guaranteed by design, characterization or correlation to other tested parameters.
3. The • denotes the specifications which apply over the full operating temperature range.

3.3

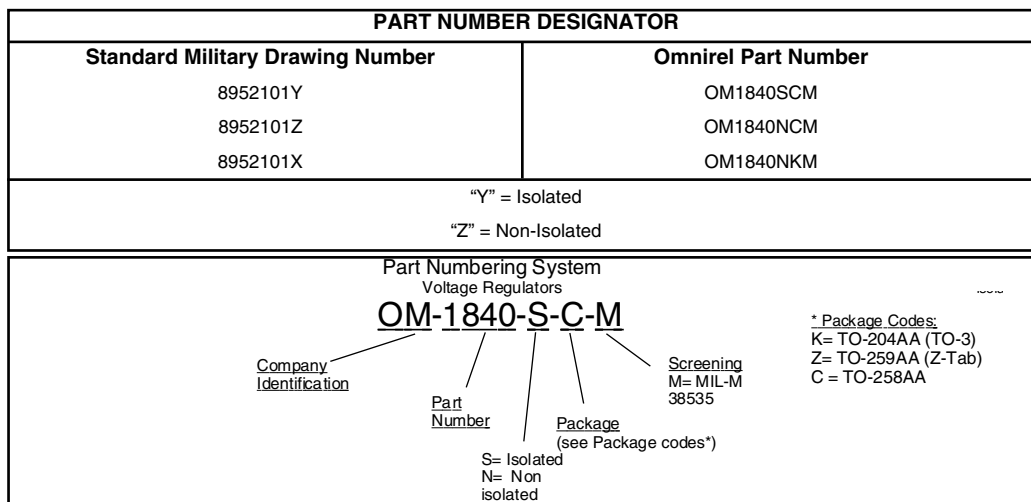


TYPICAL PERFORMANCE CHARACTERISTICS


LOAD REGULATION

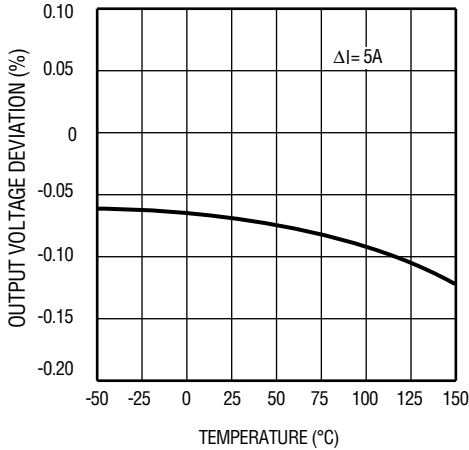


SHORT CIRCUIT CURRENT

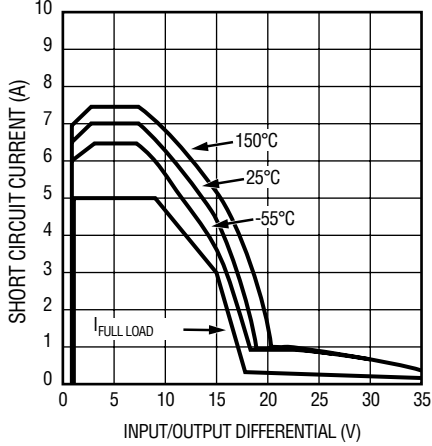


ADJUSTMENT PIN CURRENT

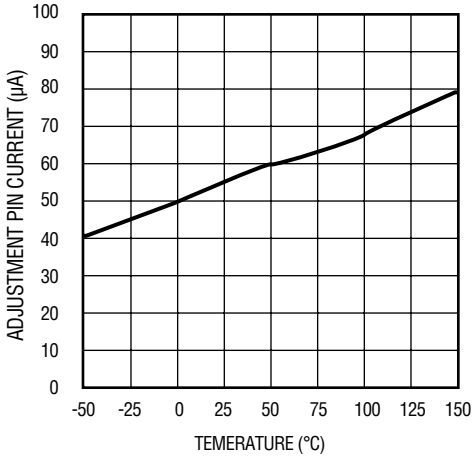


DROPOUT VOLTAGE

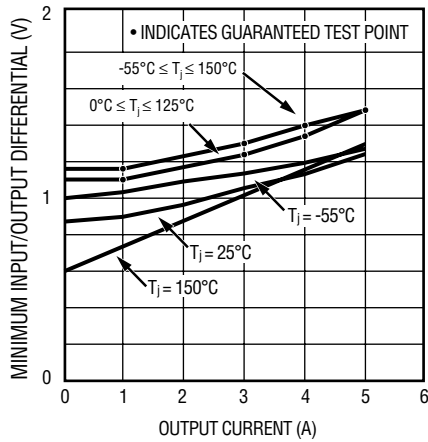

TEMPERATURE STABILITY

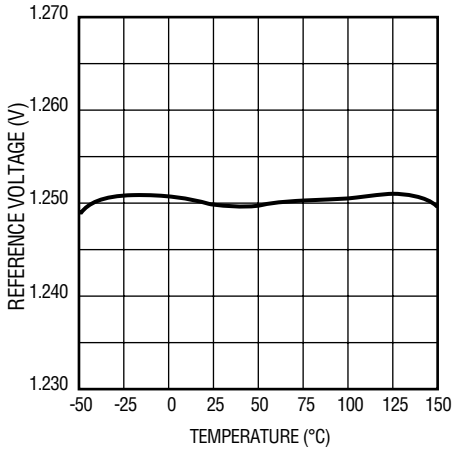


MINIMUM OPERATING CURRENT

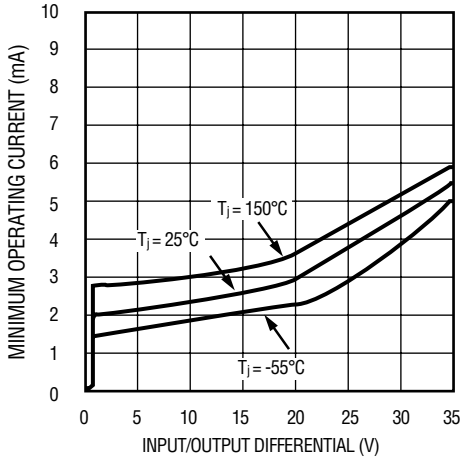


3.3

TYPICAL APPLICATIONS


Paralleling Regulators

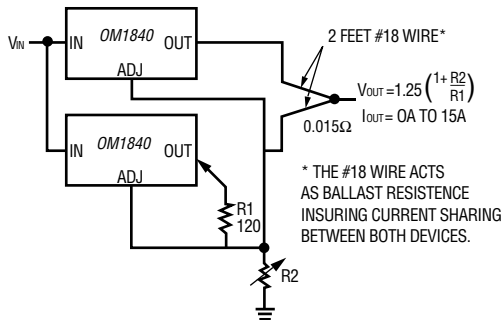

Improving Ripple Rejection

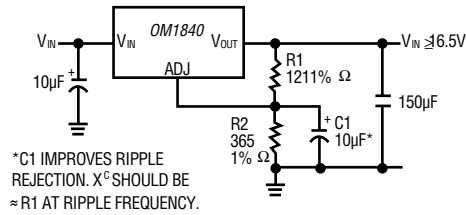


1.2V - 15V Adjustable Regulator

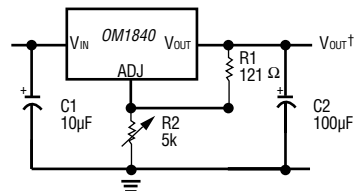


*NEEDED IF DEVICE IS FAR FROM FILTER CAPACITORS

$$\dagger V_{OUT} = 1.25V \left(1 + \frac{R_2}{R_1} \right)$$

5V Regulator with Shutdown

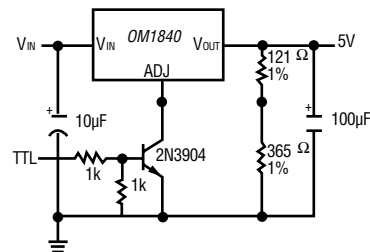


MECHANICAL OUTLINE

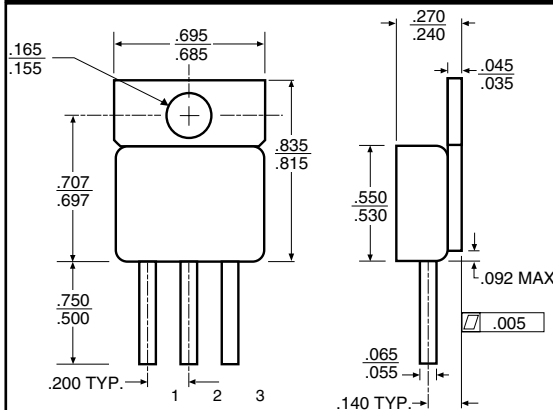

PIN OUT

- | | |
|---|-----------|
| 1 | Adjust |
| 2 | V_{OUT} |
| 3 | V_{IN} |

MECHANICAL OUTLINE TO-3

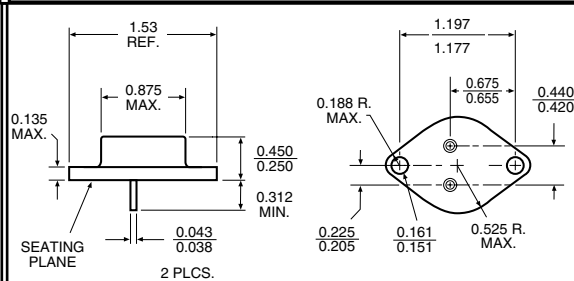

PIN OUT

- | | |
|------|-----------|
| 1 | Adjust |
| 2 | V_{IN} |
| Case | V_{OUT} |

NOTES

- Case is metal/hermetically sealed
- Isolated Tab

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru