



## 50 Ω ultra thin balun with integrated harmonic filter / conjugate match balun to nRF51822-CTAA/CTAC in WLCSP

### Features



Flip-Chip (5 bumps) package

Pin coordinates

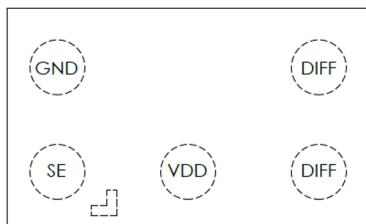

Top view

### Applications

- 2.45 GHz impedance matched balun filter
- Optimized for Nordic's chip set nRF51822-CTAA, CTAC
- Wearable applications

### Description

This device is an ultraminiature extra thin balun that integrates matching network and harmonics filter.

Matching impedance has been customized for the nRF51822-CTAA and CTAC WLCSP Nordic Semiconductor circuits.

Based on IPD technology on high resistivity silicon it optimizes the RF performance. The BALF-NRF01J5 has been tested and approved by Nordic Semiconductor.

STMicroelectronics qualified this product intended to be used in System in Package module based on standard reliability procedure. For more details, please contact ST representatives.

It is the responsibility of the customer to perform qualification reliability verifications as it is related to customer specific application / mission profile and module design / process.

Product status
BALF-NRF01J5

## 1 Characteristics

**Table 1. Absolute ratings (limiting values)**

Symbol	Parameter	Value			Unit
		Min.	Typ.	Max.	
P <sub>IN</sub>	Input power RF <sub>IN</sub>		-	20	dBm
V <sub>ESD</sub>	ESD ratings human body model (JESD22-A114-C), all I/O one at a time while others connected to GND	2000	-		V
	ESD ratings charge device model (JESD22-C101-C)	500	-		
	ESD ratings machine model, all I/O	200	-		
T <sub>OP</sub>	Operating temperature	-40	-	+85	°C

**Table 2. Impedances (T<sub>amb</sub> = 25 °C)**


Symbol	Parameter	Value			Unit
		Min.	Typ.	Max.	
Z <sub>OUT</sub>	Nominal differential output impedance	-	matched	-	Ω
Z <sub>IN</sub>	Nominal input impedance	-	50	-	Ω

**Table 3. RF performances (T<sub>amb</sub> = 25 °C)**


Symbol	Parameter	Value			Unit
		Min.	Typ.	Max.	
f	Frequency range (bandwidth)	2400		2540	MHz
I <sub>L</sub>	Insertion loss in bandwidth		2.2	2.4	dB
R <sub>L</sub>	Return loss in bandwidth	9	12		dB
φimb	Phase imbalance	-7.2	7	7.2	°
Aimb	Amplitude imbalance	-0.5	0.3	0.5	dB
2f0	2nd harmonic S21 attenuation	4880 MHz	12	13.5	
3f0	3rd harmonic S21 attenuation	7320 MHz	24	25	dB

## 1.1 On-board measurements


**Figure 1. Transmission ( $T_{amb} = 25^{\circ}\text{C}$ )**

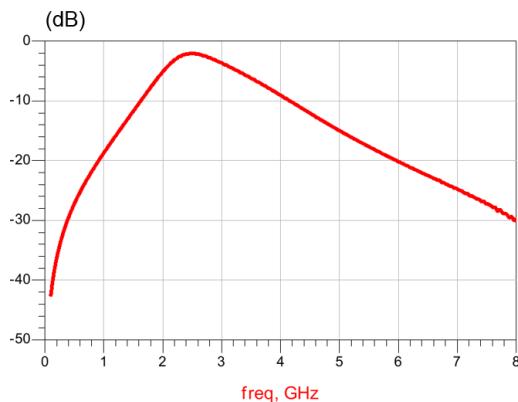


**Figure 2. Insertion loss ( $T_{amb} = 25^{\circ}\text{C}$ )**

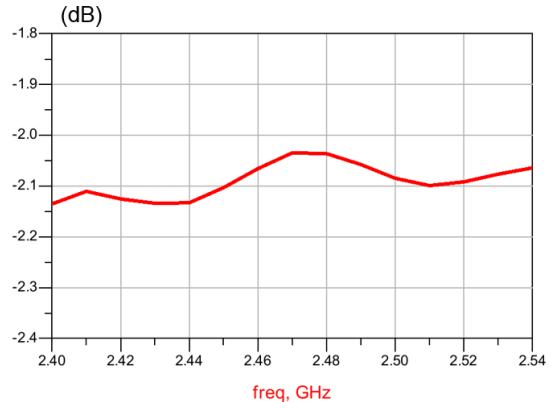


**Figure 3. Return loss on SE port ( $T_{amb} = 25^{\circ}\text{C}$ )**

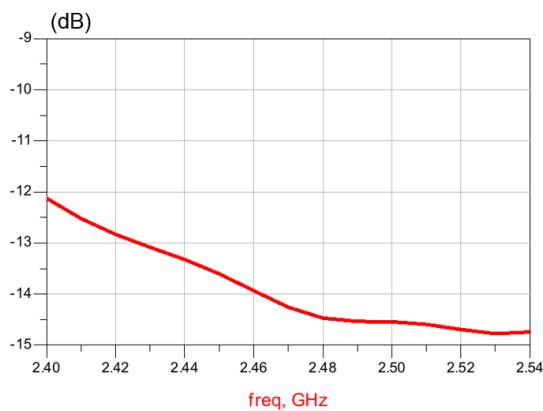


**Figure 4. Return loss on DIFF port ( $T_{amb} = 25^{\circ}\text{C}$ )**

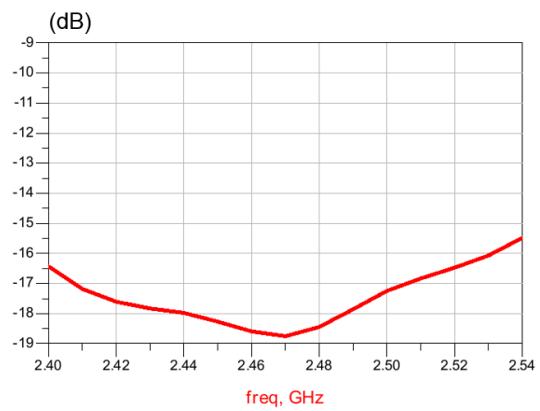

**Figure 5. Amplitude imbalance ( $T_{amb} = 25^{\circ}\text{C}$ )**

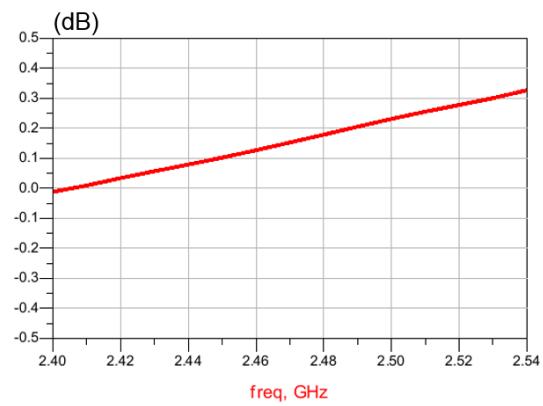

**Figure 6. Phase imbalance ( $T_{amb} = 25^{\circ}\text{C}$ )**

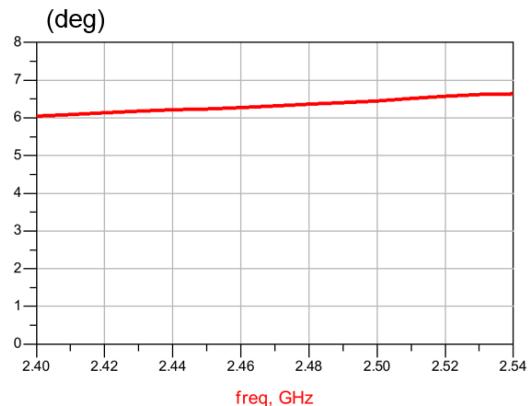

## 2 Package information

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK® specifications, grade definitions and product status are available at: [www.st.com](http://www.st.com). ECOPACK® is an ST trademark.

### 2.1 Ultra thin Flip-Chip 5 bumps package information

- Epoxy meets UL94, V0
- Lead-free package

Figure 7. Ultra thin Flip-Chip 5 bumps package outline


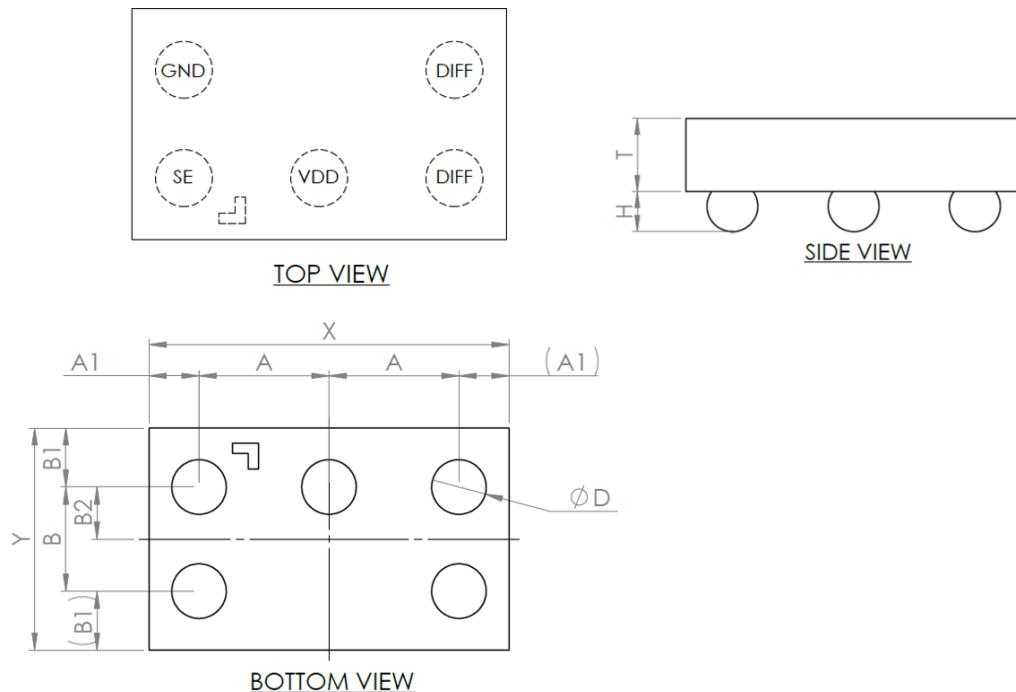


Table 4. Ultra thin Flip-Chip 5 bumps package mechanical data

Parameter	Description	Min.	Typ.	Max.	Unit
X	X dimension of the die	1315	1345	1375	μm
Y	Y dimension of the die	785	815	845	
A	X pitch		500		
B	Y pitch		400		
A1	Distance from bump to edge of die on X axis		172.5		
B1	Distance from bump to edge of die on Y axis		207.5		
B2	Distance from bump to center of die on Y axis		200		
D	Bump diameter	202	227	252	
T	Substrate thickness	190	200	210	
H	Bump height	117	142	167	

Figure 8. Recommended land pattern

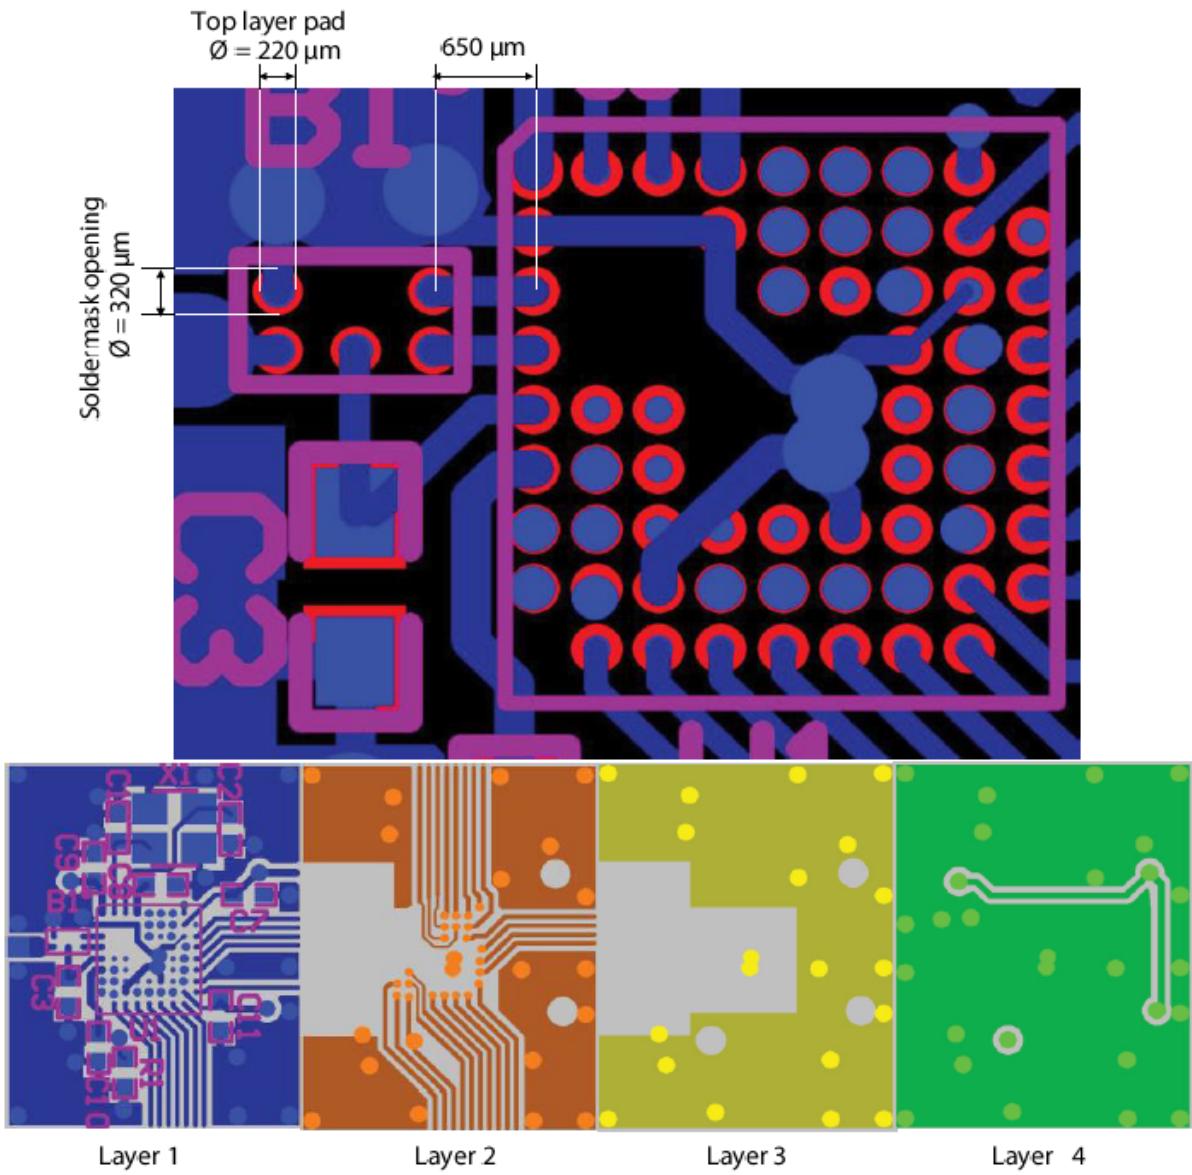

Note: Screenprinting, stencil windows 290 x 290 x 100  $\mu\text{m}^3$  (coeff 0.725)


Note: to achieve minimum component height after PCB reflow, the below recommendations must be followed : in assembly process, a flux must be used, not a solder paste

Figure 9. PCB stack-up recommendation



## 2.2 Flip-chip 5 bumps packing information

Figure 10. Marking

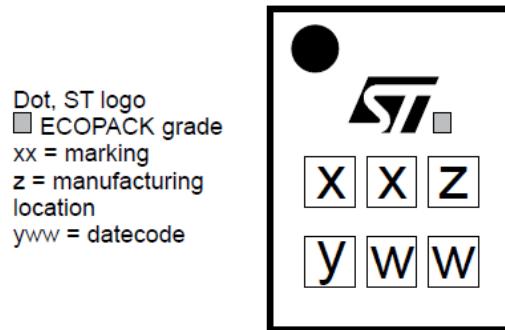

Note: More packing information is available in the application note:

- AN2348 Flip-Chip: "Package description and recommendations for use"

Figure 11. Footprint - non solder mask defined


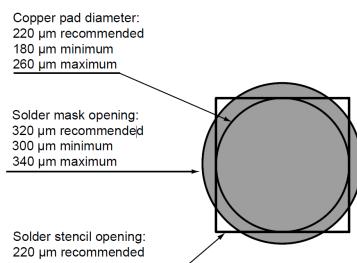


Figure 12. Footprint - solder mask defined

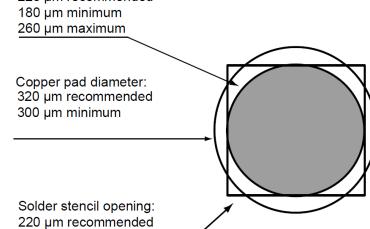

## 3

## Ordering information

Table 5. Ordering information

Order code	Marking	Package	Weight	Base qty.	Delivery mode
BALF-NRF01J5	TL	Flip-Chip 5 bumps	0.631 mg	5000	Tape and reel

## Revision history

**Table 6. Document revision history**

Date	Revision	Changes
20-Jun-2017	1	Initial release.
22-Feb-2018	2	Updated Description and Table 4. Ultra thin Flip-Chip 5 bumps package mechanical data.
04-Apr-018	3	Updated <a href="#">Table 4. Ultra thin Flip-Chip 5 bumps package mechanical data</a> .

**IMPORTANT NOTICE – PLEASE READ CAREFULLY**

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2018 STMicroelectronics – All rights reserved

ООО "ЛайфЭлектроникс"

"LifeElectronics" LLC

ИНН 7805602321 КПП 780501001 Р/С 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 30101810900000000703 БИК 044030703

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибуторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибуторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помочь разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)  
Email: org@lifeelectronics.ru