

## Features

- Attenuation: 1 dB Steps to 50 dB
- Low DC Power Consumption
- Small Footprint, JEDEC Package
- Integral TTL Driver
- 50 ohm Impedance
- Test Boards are Available
- Tape and Reel Packaging Available
- Lead-Free CSP-1 Package
- 100% Matte Tin Plating over Copper
- Halogen-Free “Green” Mold Compound
- 260°C Reflow Compatible
- RoHS\* Compliant Version of AT90-0106

## Description

M/A-COM's MAAD-007082-000100 is a GaAs FET 6-bit digital attenuator with integral TTL driver. Step size is 1 dB providing a 50 dB total attenuation range. This device is in a PQFN plastic surface mount package. The MAAD-007082-000100 is ideally suited for use where accuracy, fast speed, very low power consumption and low costs are required.


## Ordering Information

| Part Number        | Package           |
|--------------------|-------------------|
| MAAD-007082-000100 | Bulk Packaging    |
| MAAD-007082-0001TR | 1000 piece reel   |
| MAAD-007082-0001TB | Sample Test Board |

Note: Reference Application Note M513 for reel size information.

\* Restrictions on Hazardous Substances, European Union Directive 2002/95/EC.

## Functional Schematic

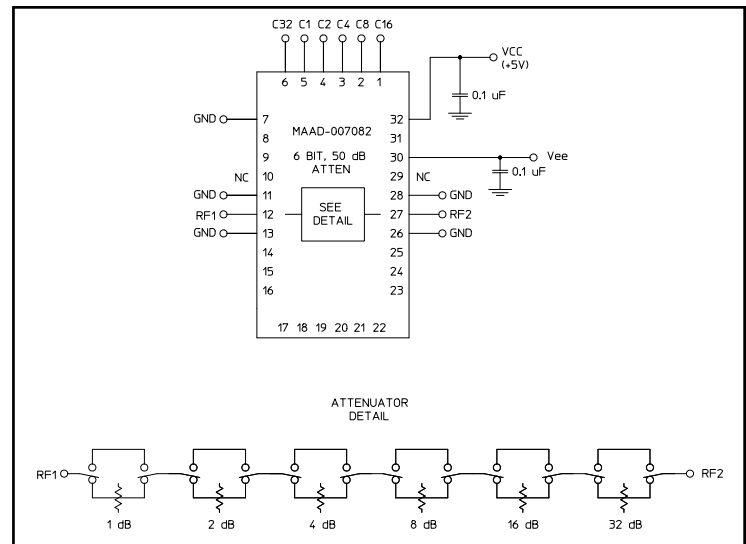

## Pin Configuration<sup>1</sup>

| Pin No. | Function        | Pin No. | Function        |
|---------|-----------------|---------|-----------------|
| 1       | C16             | 17      | NC              |
| 2       | C8              | 18      | NC              |
| 3       | C4              | 19      | NC              |
| 4       | C2              | 20      | NC              |
| 5       | C1              | 21      | NC              |
| 6       | C32             | 22      | NC              |
| 7       | GND             | 23      | NC              |
| 8       | NC              | 24      | NC              |
| 9       | NC              | 25      | NC              |
| 10      | NC <sup>2</sup> | 26      | GND             |
| 11      | GND             | 27      | RF2             |
| 12      | RF1             | 28      | GND             |
| 13      | GND             | 29      | NC <sup>2</sup> |
| 14      | NC              | 30      | -Vee            |
| 15      | NC              | 31      | NC              |
| 16      | NC              | 32      | +Vcc            |

1. The exposed pad centered on the package bottom must be connected to RF and DC ground. (For PQFN Packages)
2. Pins 10 and 29 must be isolated.

**ADVANCED:** Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.  
**PRELIMINARY:** Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

• **North America** Tel: 800.366.2266 • **Europe** Tel: +353.21.244.6400  
 • **India** Tel: +91.80.4155721 • **China** Tel: +86.21.2407.1588  
 Visit [www.macomtech.com](http://www.macomtech.com) for additional data sheets and product information.

M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.

**Electrical Specifications:  $T_A = 25^\circ\text{C}$ ,  $Z_0 = 50\Omega$**

| Parameter  | Test Conditions  | Frequency                    | Units              | Min          | Typ         | Max  |
|--|--|------------------------------|--------------------|--------------|-------------|--|
| Insertion Loss   | —  | DC - 2.4 GHz                 | dB                 | —            | 5.5         | 6.0  |
| Attenuation Accuracy   | Individual Bits 1-2-4-8-16-32 dB<br>Any Combination of Bits 1 to 50 dB | DC - 2.4 GHz<br>DC - 2.4 GHz | dB<br>dB           | —<br>—       | —<br>—      | $\pm( .3 +5\%$ of atten setting)<br>$\pm( .5 +8\%$ of atten setting) |
| VSWR   | Full Range   | DC - 2.4 GHz                 | Ratio              | —            | 1.8:1       | 2:1  |
| Switching Speed  | 50% Cntl to 90%/10% RF<br>10% to 90% or 90% to 10%                     | —<br>—                       | ns<br>ns           | —<br>—       | 75<br>20    | 150<br>50  |
| 1 dB Compression   | —<br>—   | 50 MHz<br>0.5 - 2.40 GHz     | dBm<br>dBm         | —<br>—       | +21<br>+24  | —<br>—   |
| Input $IP_3$   | Two-tone inputs up to +5 dBm   | 50 MHz<br>0.5-2.4 GHz        | dB<br>dB           | —<br>—       | +35<br>+48  | —<br>—   |
| +Vcc<br>-Vee   | —<br>—   | —<br>—                       | V<br>V             | 4.75<br>-8.0 | 5.0<br>-5.0 | 5.25<br>-4.75  |
| Logic "0"  | Sink Current is 20 $\mu\text{A}$ max.                                  | —                            | V                  | 0.0          | —           | 0.8  |
| Logic "1"  | Source Current is 20 $\mu\text{A}$ max.                                | —                            | V                  | 2.0          | —           | 5.0  |
| $V_{IL}$<br>$V_{IH}$   | LOW-level input voltage<br>HIGH-level input voltage                    | —<br>—                       | V<br>V             | 0.0<br>2.0   | —<br>—      | 0.8<br>5.0   |
| $I_{in}$ (Input Leakage Current)                                   | $V_{in} = V_{CC}$ or GND   | —                            | $\mu\text{A}$      | -1.0         | —           | 1.0  |
| $I_{cc}$<br>(Quiescent Supply Current)                             | $V_{cntrl} = V_{CC}$ or GND  | —                            | $\mu\text{A}$      | —            | 250         | 400  |
| $\Delta I_{cc}^3$<br>(Additional Supply Current Per TTL Input Pin) | $V_{CC} = \text{Max}$ , $V_{cntrl} = V_{CC} - 2.1 \text{ V}$           | —                            | $\text{mA}$        | —            | —           | 1.0  |
| $I_{EE}$   | $V_{EE}$ min to max, $V_{in} = V_{IL}$ or $V_{IH}$                     | —                            | $\text{mA}$        | -1.0         | -0.2        | —  |
| Thermal Resistance $\theta_{jc}$                                   | —  | —                            | $^\circ\text{C/W}$ | —            | 15          | —  |

**Absolute Maximum Ratings <sup>3,4</sup>**

| Parameter                                     | Absolute Maximum                                      |
|---|---|
| Max. Input Power<br>0.05 GHz<br>0.5 - 2.4 GHz | +27 dBm<br>+34 dBm                                    |
| $V_{CC}$                                      | $-0.5\text{V} \leq V_{CC} \leq +7.0\text{V}$          |
| $V_{EE}$                                      | $-8.5\text{V} \leq V_{EE} \leq +0.5\text{V}$          |
| $V_{CC} - V_{EE}$                             | $-0.5\text{V} \leq V_{CC} - V_{EE} \leq 14.5\text{V}$ |
| $V_{in}^5$                                    | $-0.5\text{V} \leq V_{in} \leq V_{CC} + 0.5\text{V}$  |
| Operating Temperature                         | $-40^\circ\text{C}$ to $+85^\circ\text{C}$            |
| Storage Temperature                           | $-65^\circ\text{C}$ to $+125^\circ\text{C}$           |

- Exceeding any one or combination of these limits may cause permanent damage to this device.
- M/A-COM does not recommend sustained operation near these survivability limits.
- Standard CMOS TTL interface, latch-up will occur if logic signal is applied prior to power supply.

**Truth Table**

| C32 | C16 | C8 | C4 | C2 | C1 | Attenuation     |
|-----|-----|----|----|----|----|-----------------|
| 0   | 0   | 0  | 0  | 0  | 0  | Loss, Reference |
| 0   | 0   | 0  | 0  | 0  | 1  | 1.0 dB          |
| 0   | 0   | 0  | 0  | 1  | 0  | 2.0 dB          |
| 0   | 0   | 0  | 1  | 0  | 0  | 4.0 dB          |
| 0   | 0   | 1  | 0  | 0  | 0  | 8.0 dB          |
| 0   | 1   | 0  | 0  | 0  | 0  | 16.0 dB         |
| 1   | 0   | 0  | 0  | 0  | 0  | 32.0 dB         |
| 1   | 1   | 0  | 0  | 1  | 0  | 50.0 dB         |

0 = TTL Low; 1 = TTL High

## Handling Procedures

Please observe the following precautions to avoid damage:


## Static Sensitivity

Gallium Arsenide Integrated Circuits are sensitive to electrostatic discharge (ESD) and can be damaged by static electricity. Proper ESD control techniques should be used when handling these devices.

## Moisture Sensitivity

The MSL rating for this part is defined as Level 2 per IPC/JEDEC J-STD-020. Parts shall be stored and/or baked as required for MSL Level 2 parts.


## Recommended PCB Configuration<sup>6</sup>

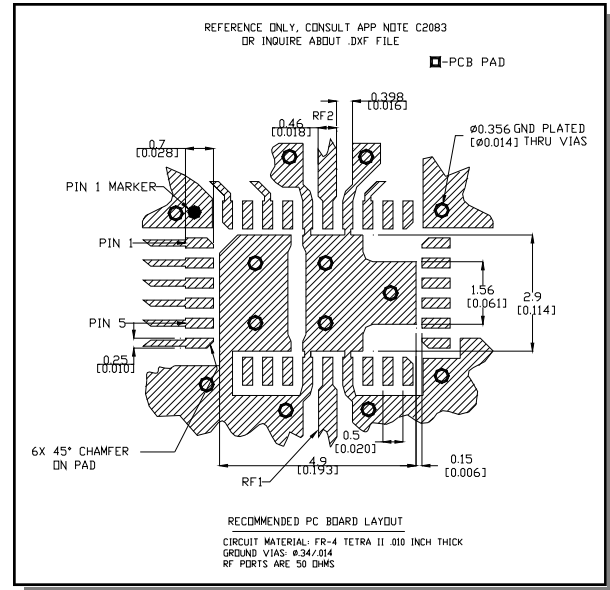


6. Application Note C2083 is available on line at [www.macom.com](http://www.macom.com)

## Typical Performance Curves

### Insertion Loss

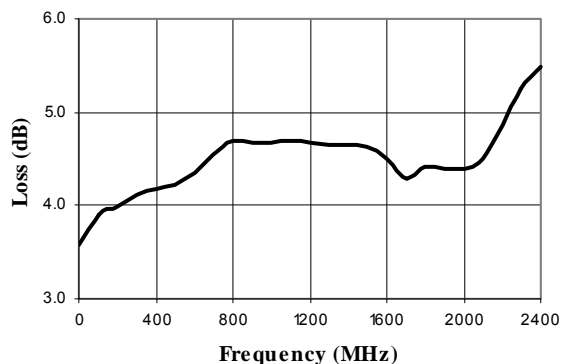


### VSWR @ Insertion Loss

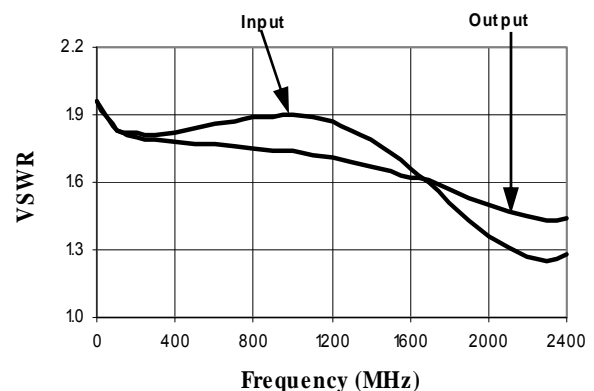


## Typical Performance Curves


**Attenuation Error, 1 dB Bit**

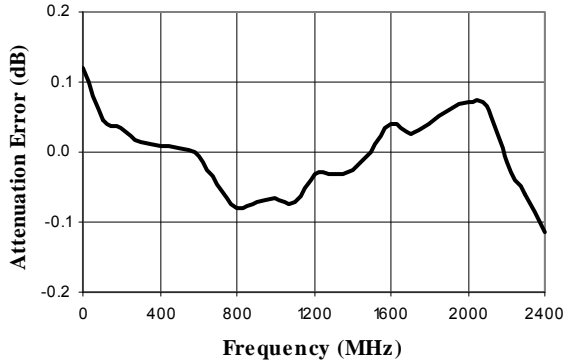


**Attenuation Error, 2 dB Bit**

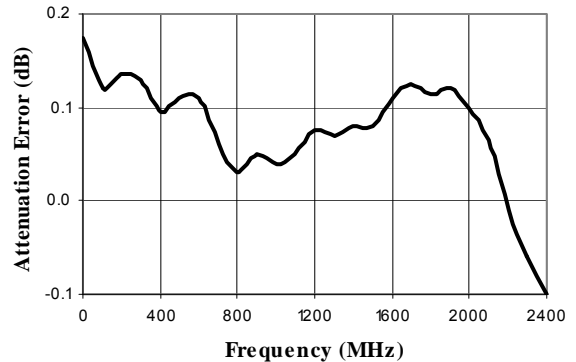


**Attenuation Error, 4 dB Bit**

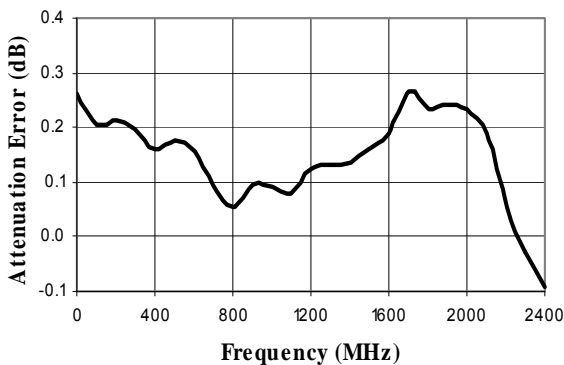


**Attenuation Error, 8 dB Bit**

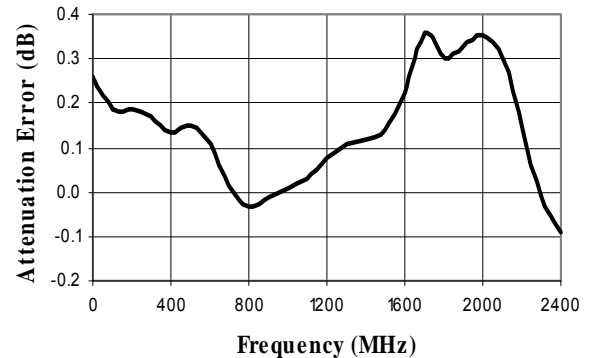

**Attenuation Error, 16 dB Bit**

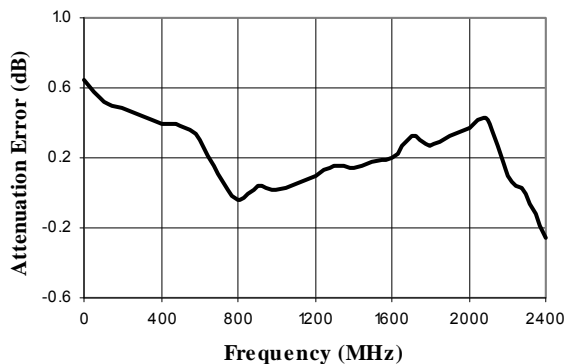


**Attenuation Error, 32 dB Bit**

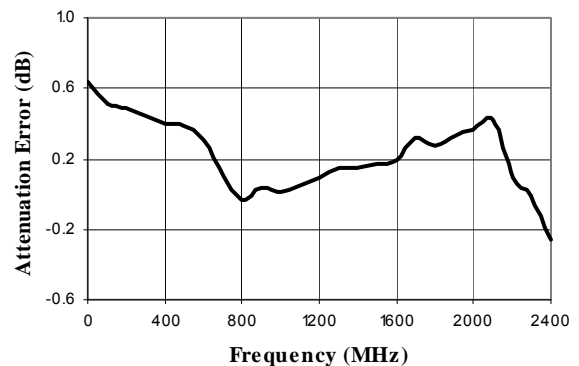


## Typical Performance Curves


Attenuation Error, Max. Attenuation

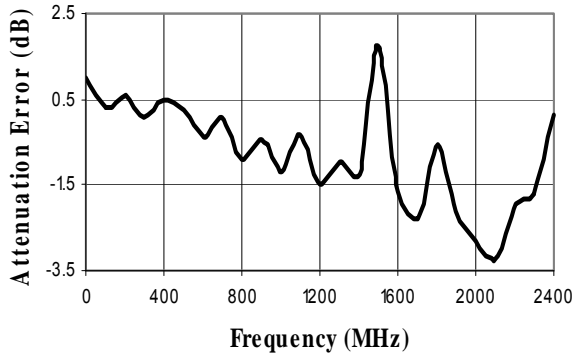


VSWR, 1 dB Bit

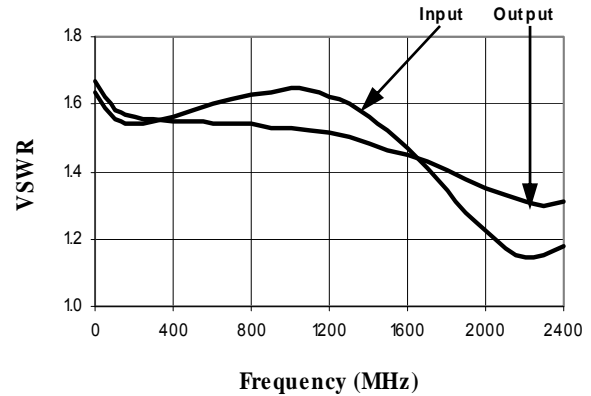


VSWR, 2 dB Bit

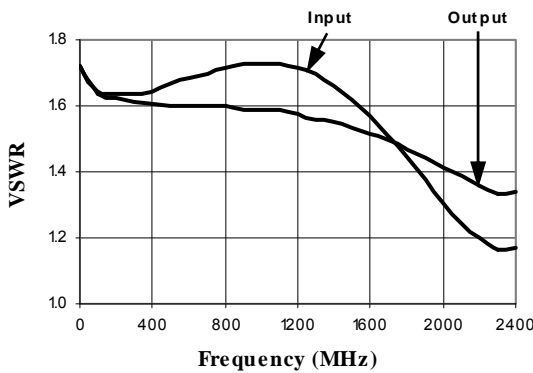


VSWR, 4 dB Bit

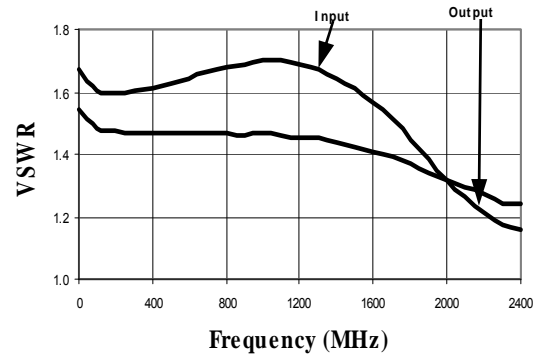

VSWR, 8 dB Bit

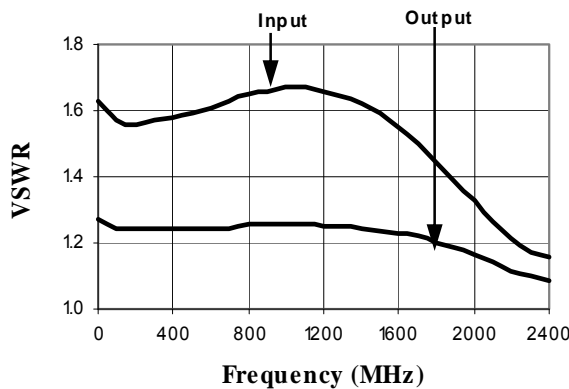


VSWR, 16 dB Bit

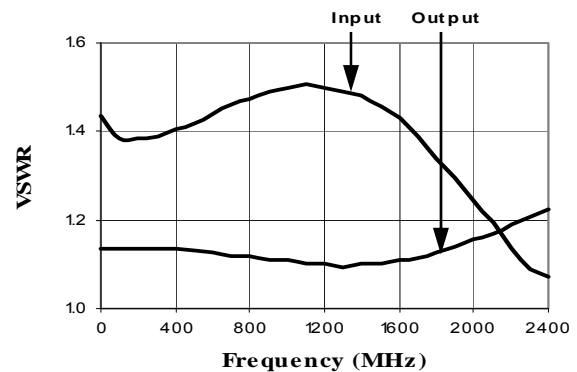


## Typical Performance Curves


VSWR, 32 dB Bit

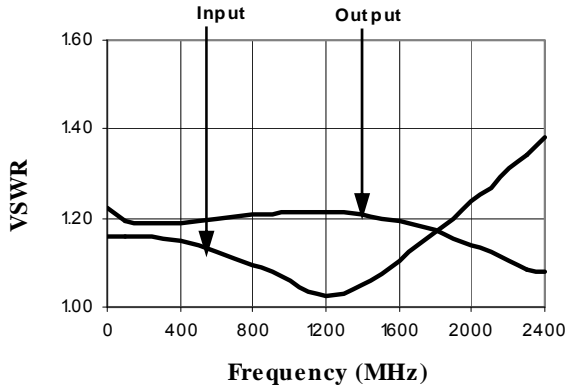


VSWR, Maximum Attenuation

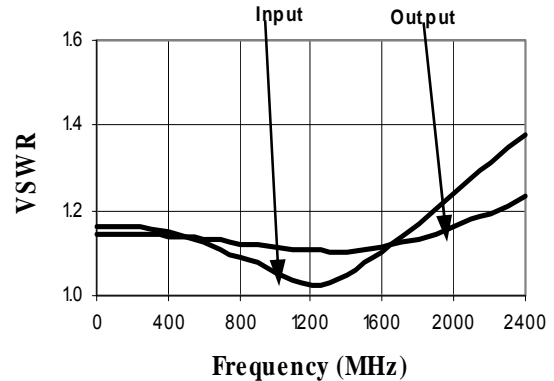


Maximum IP3 over Temperature Range and Attenuation @ 50 MHz

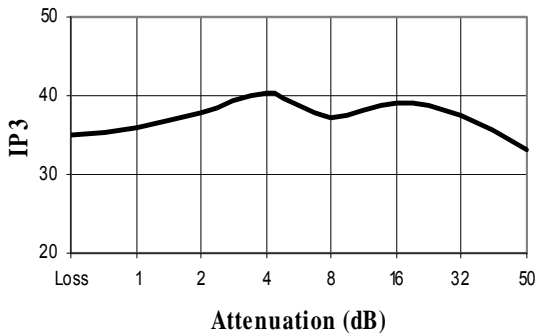


Maximum IP3 over Temperature Range and Attenuation @ 950 MHz

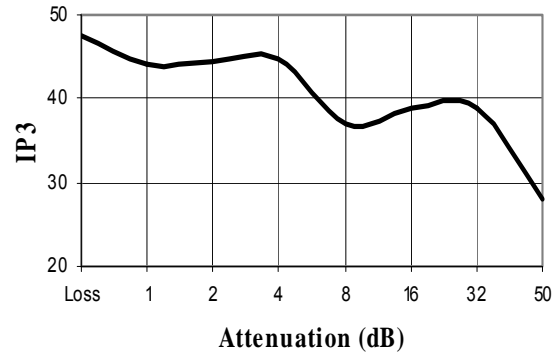

Maximum IP3 over Temperature Range and Attenuation @ 1900 MHz

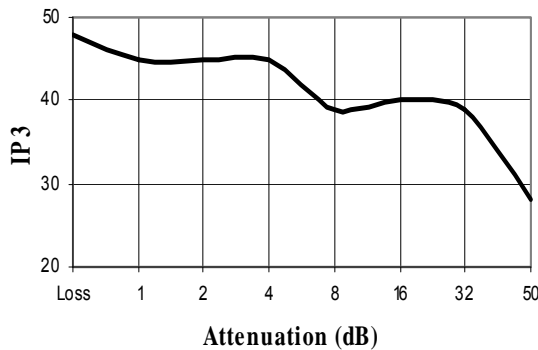

**CSP-1, Lead-Free 4 x 6 mm, 32-lead PQFN<sup>†</sup>**

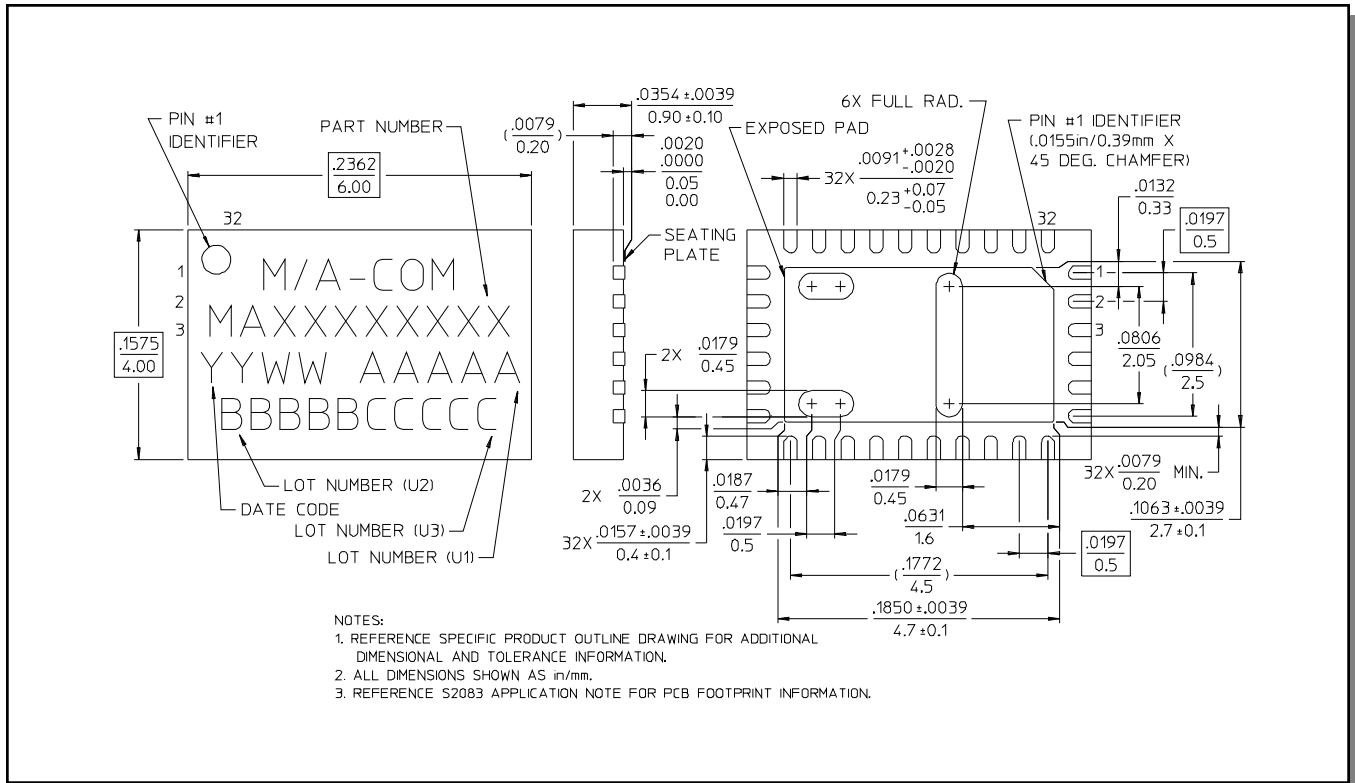

<sup>†</sup> Reference Application Note M538 for lead-free solder reflow recommendations.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)