

SPECIFICATION

Part No.	: SGGP.25.2.A.02
Description	: GPS/GLONASS/GALILEO SMD Mount Embedded Ceramic Patch Antenna 25*25*2mm
Features	: 3.34 dBi Peak Gain for GPS/GALILEO Band 3.32 dBi Peak Gain for GLONASS Band 25mm*25mm*2mm dimension SMD direct mount ceramic patch antenna Automotive TS16949 Production and Quality Approved RoHS compliant



Front



Back

1. Introduction

The SGGP.25.2.A.02 is an embedded SMD ceramic GPS/GLONASS/GALILEO passive patch antenna with a low profile of 2mm thickness. It is designed for applications such as

- navigation
- infotainment
- vehicle tracking/fleet management systems
- UAV
- telematics devices

where a high performance solution is needed in a low profile form factor


The antenna has been tuned to mount centrally a 50*50 mm ground plane, working at 1575.42MHz and 1602MHz, with a 3.34 dBi gain and 3.32 dBi gain, respectively. 70% efficiency is best in class. The ceramic patch is mounted via reflow process from a pick and place machine. The antenna itself is manufactured and tested in a TS16949 first tier automotive approved facility.

For further optimization to customer specific device environments where ground-plane size or mounting location is different, which can lead to detuning, a custom tuned patch antennas can be supplied, subject to NRE and MOQ. For more details please contact your regional Taoglas facility.

2. Specification


ELECTRICAL		
Application Bands	GPS/GALILEO	GLONASS
Operation Frequency (MHz)	1575.42 ±1.023	1602±5
Return Loss (dB)	< -10	
Gain at Zenith (dBi)	3.34	3.32
Efficiency (%)	67.41	67.94
Impedance	50 ohms	
MECHANICAL		
Ceramic Dimension (mm)	25*25*2	
Weight (g)	5.74	
ENVIRONMENTAL		
Operation Temperature	-40°C to 85°C	
Humidity	Non-condensing 65°C 95% RH	

* Antenna properties were measured with the antenna mounted on 50*50mm Ground Plane
Taoglas Part # SGGPD.25B

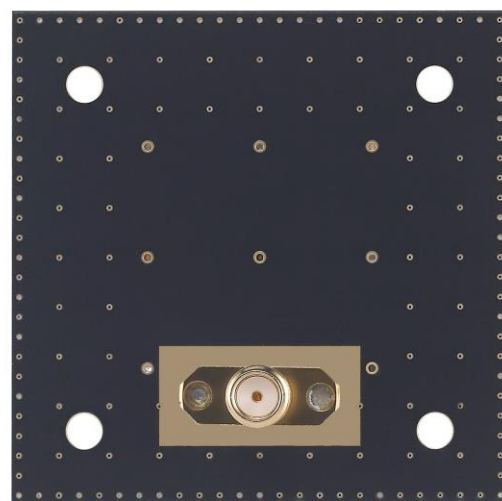


3. Antenna Characteristics


3.1. Return Loss

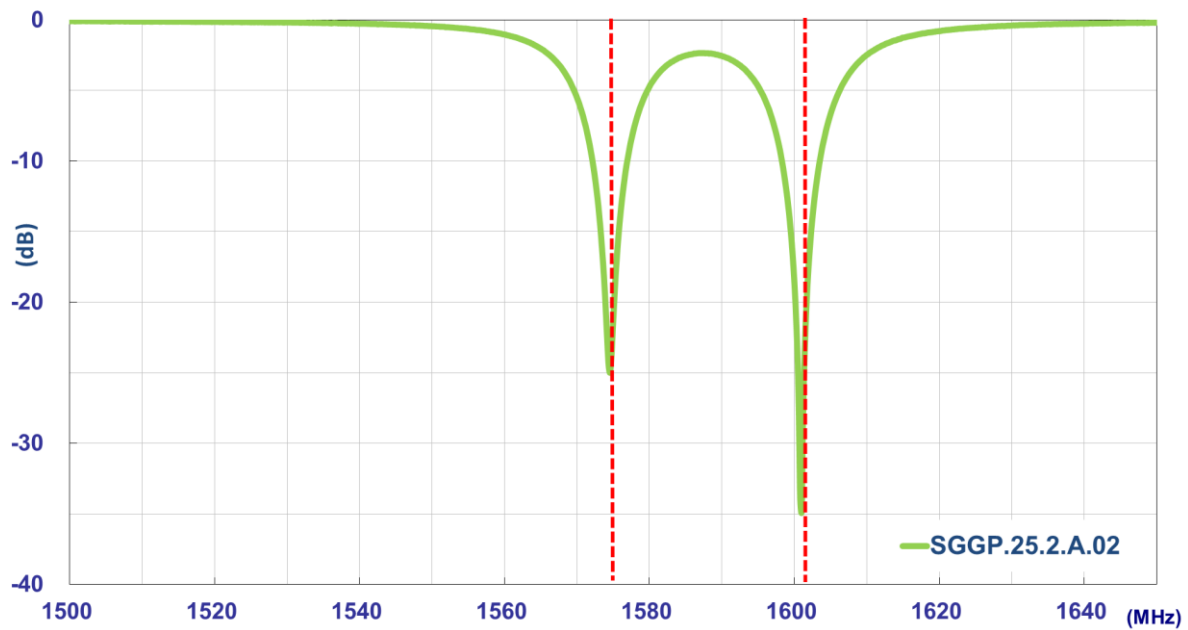


3.2. Efficiency

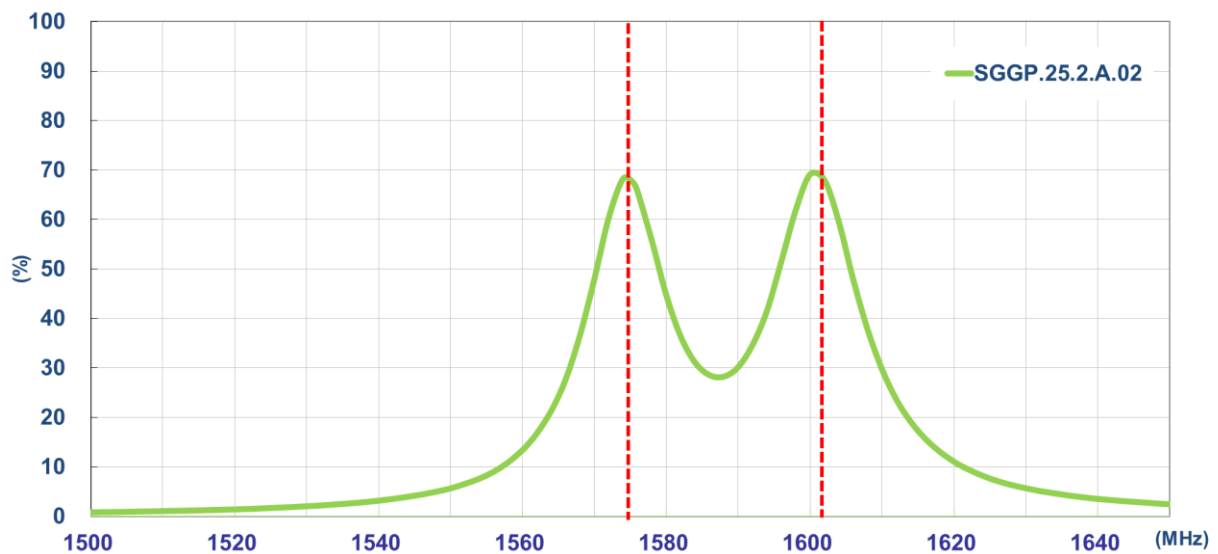

3.3. Average Gain

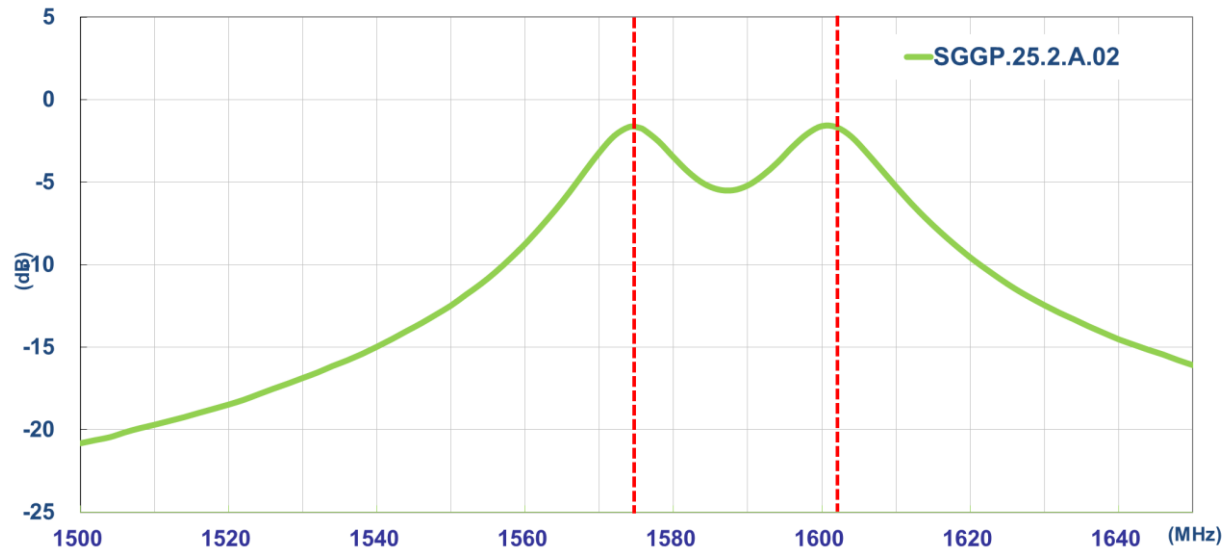


3.4. Peak Gain

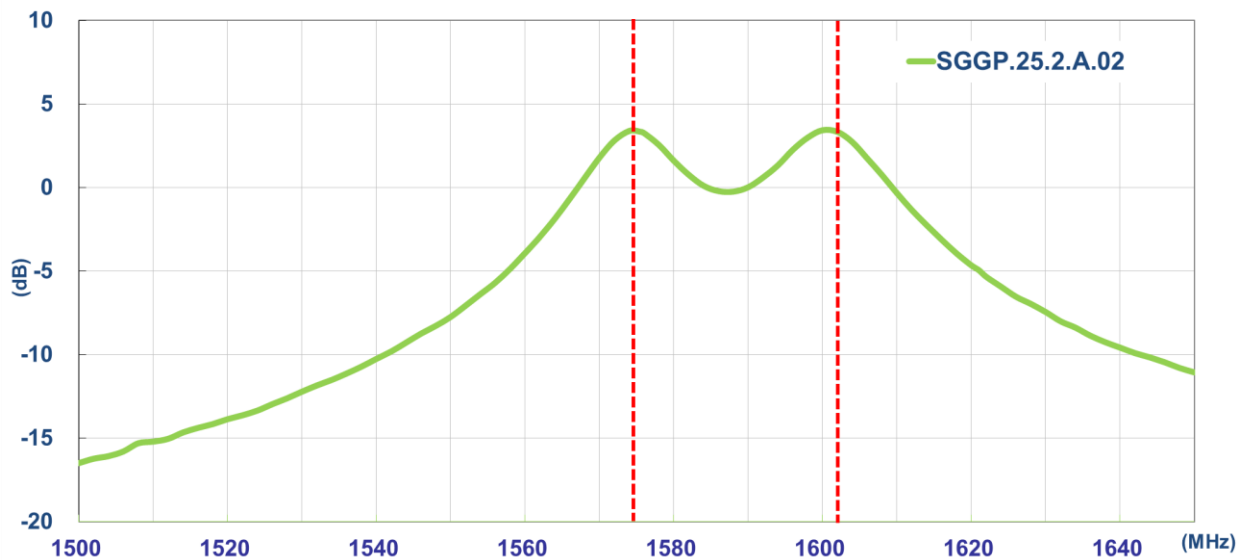

4. Antenna Radiation Pattern


4.1. Measurement Setup

The SGGP.25.2.A.02 antenna is tested with 50mm*50mm ground plane in a CTIA certified ETS-Lindgren Anechoic Chamber. The test setup is shown below.

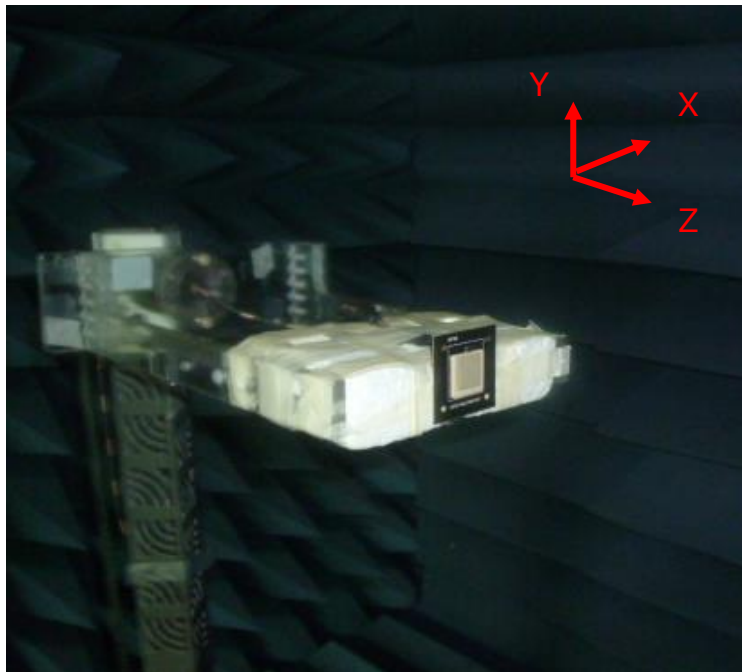


4.2. 2D Radiation Pattern


XY Plane

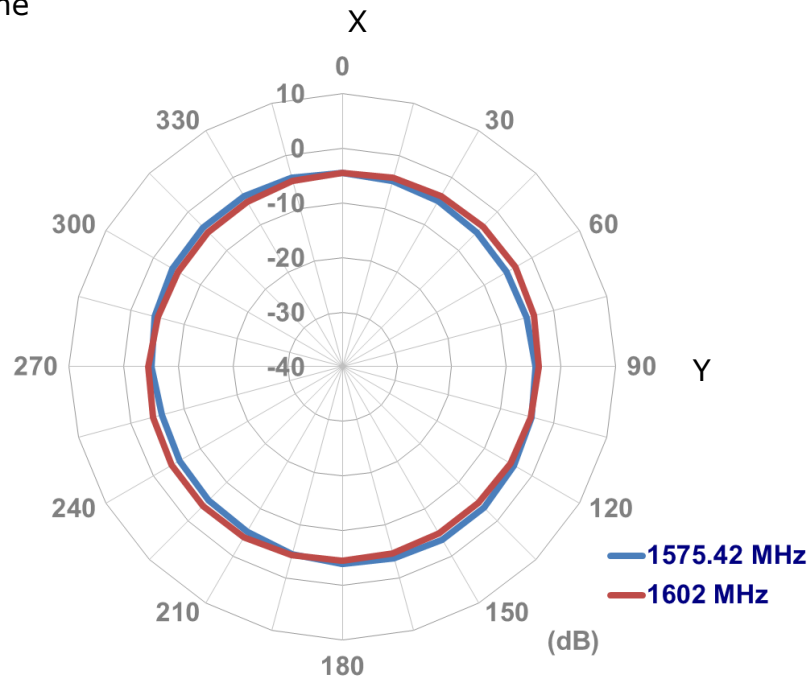

XZ Plane

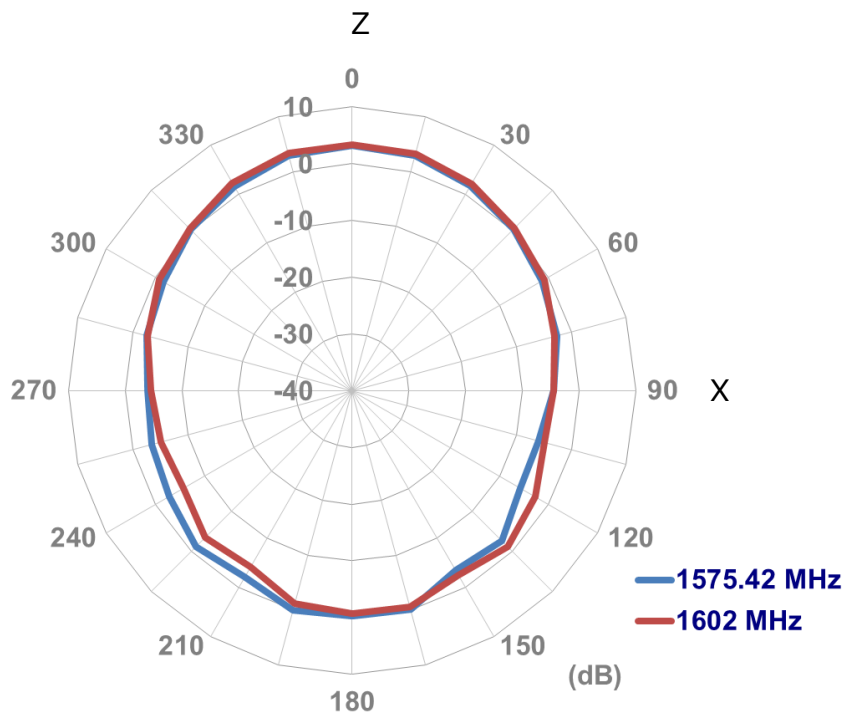


YZ Plane

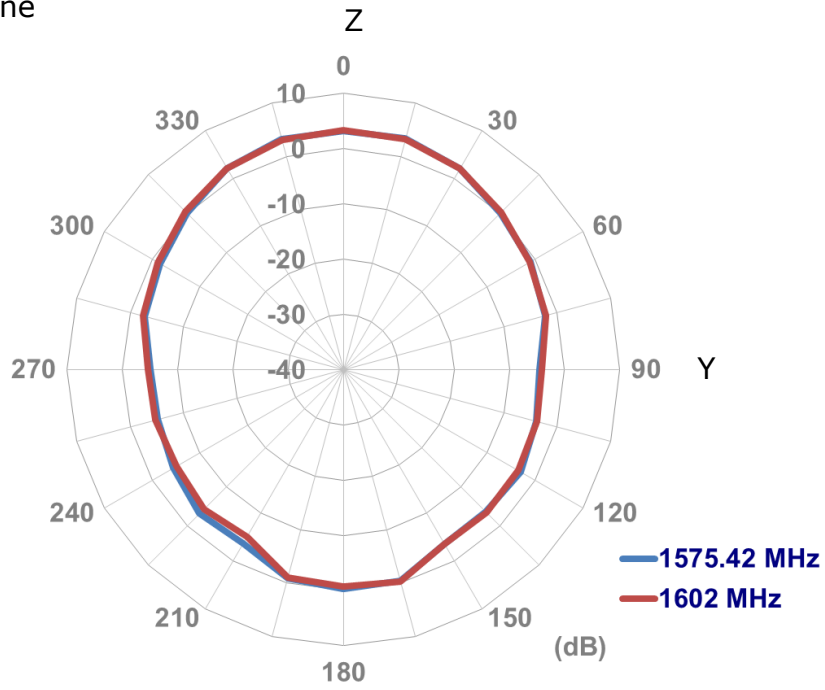


4.3. 3D Radiation Pattern

1575.42MHz

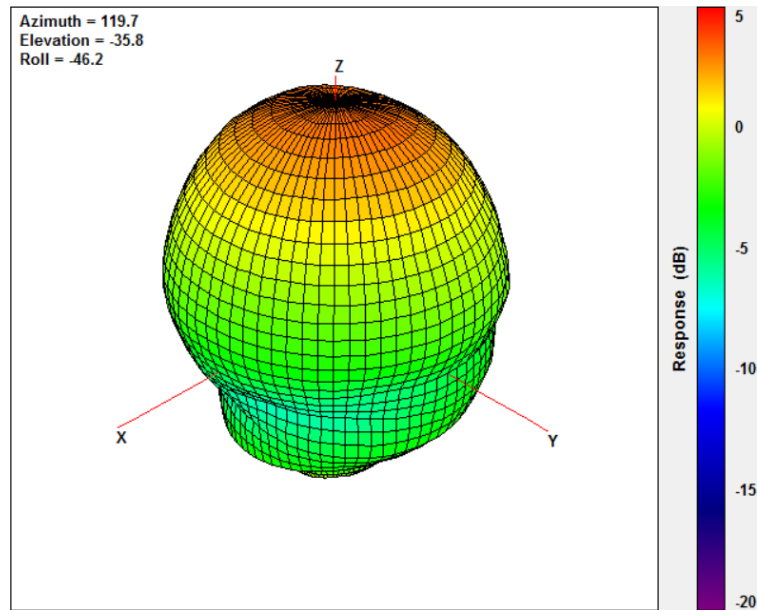


1602MHz

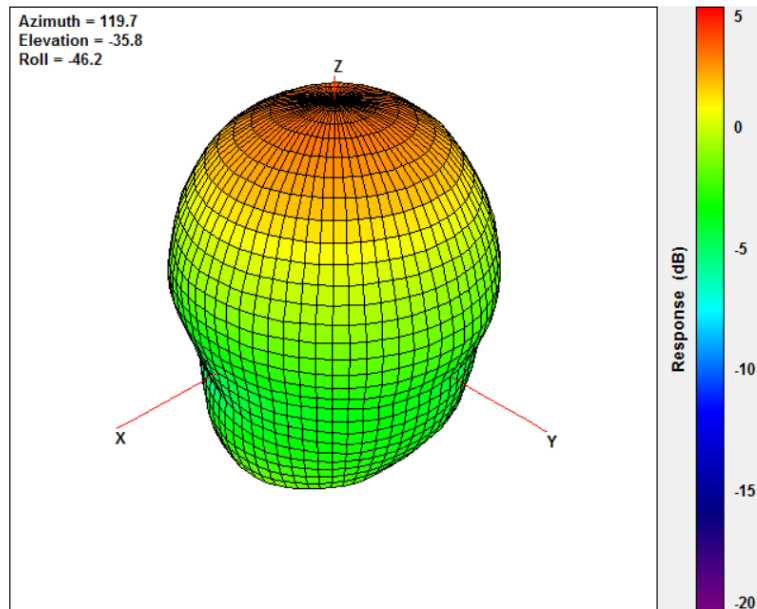


5. Mechanical Drawing


Top View

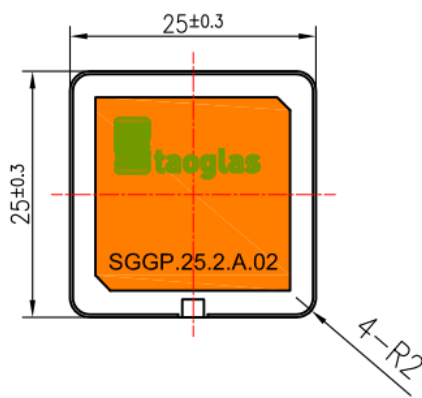

Side View




Bottom View




Unit:mm

6. Evaluation Board (SGGPD.25B)

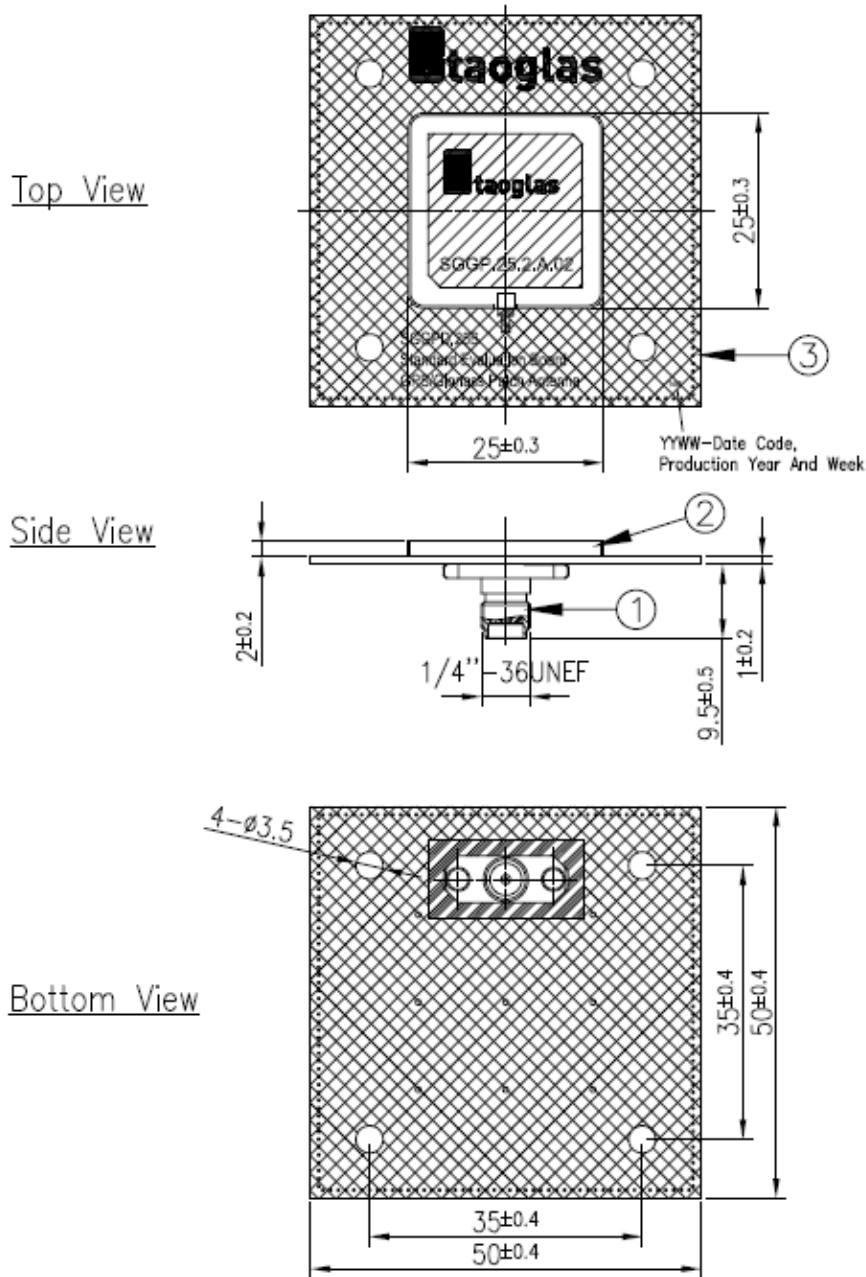


Notes

1. Silver area
2. Solder mask
3. Solder Area





	Name	Material	Finish	QTY
1	PCB SMA(F) ST	Brass	Gold	1
2	SGGP.25.2.A.02 Antenna	Ceramic	Clear	1
3	PCB (50x50x1mm)	Composite	Black	1

7. PCB Footprint Recommendation

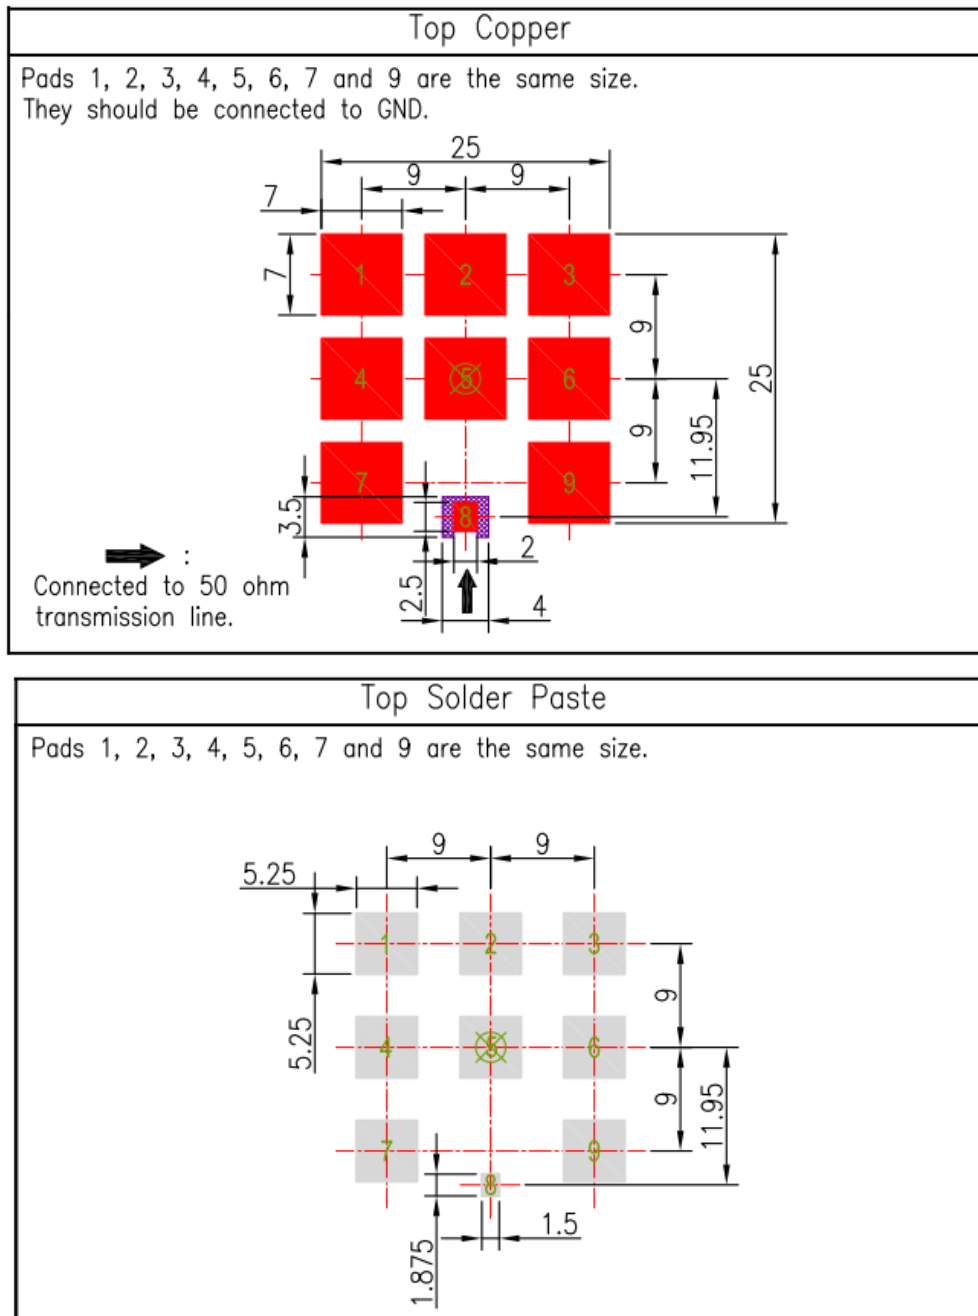

Unit:mm

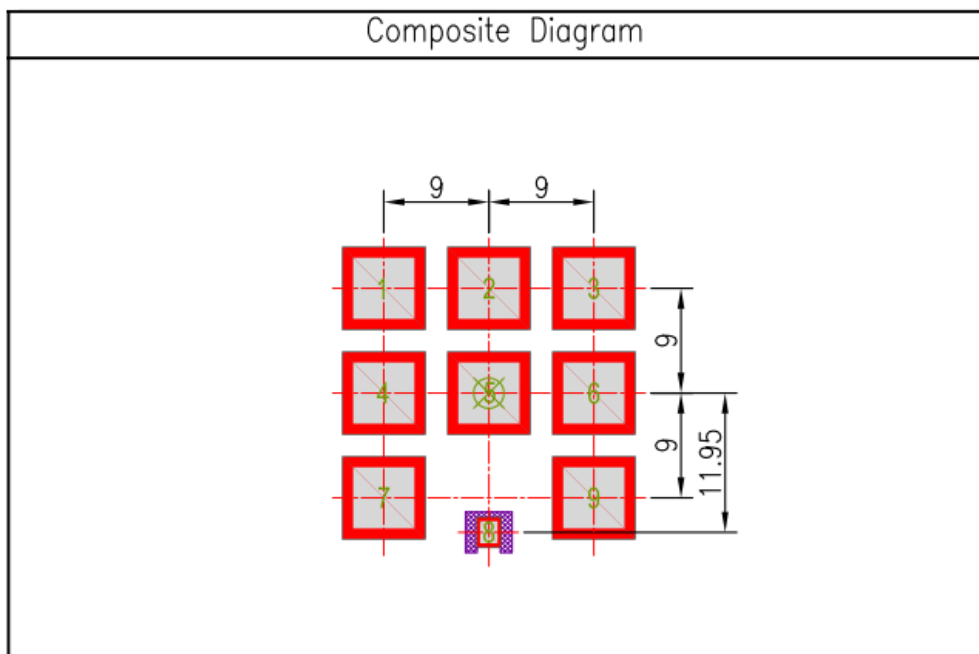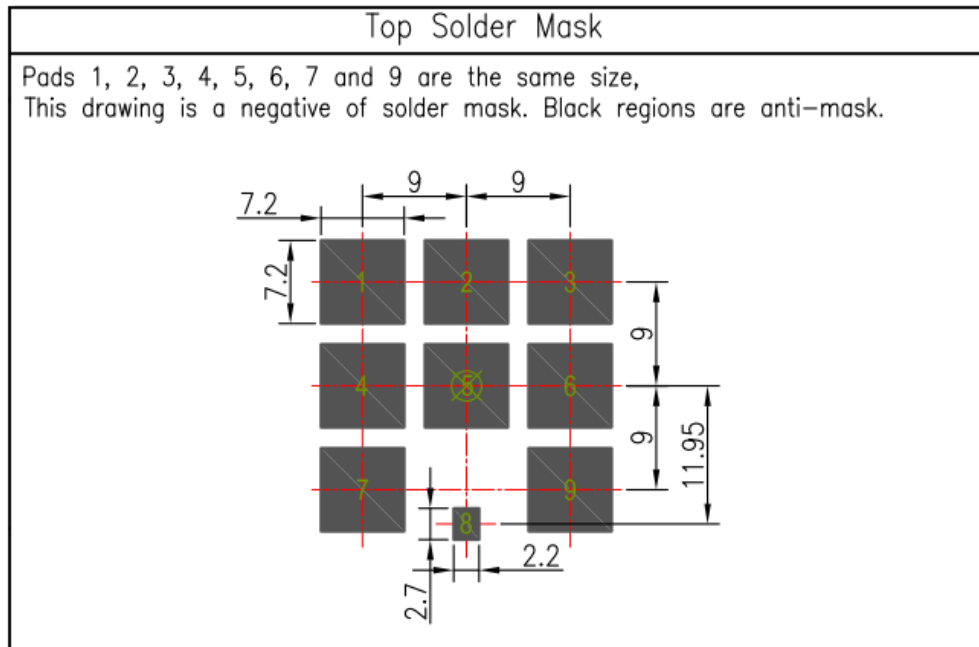

Unit:mm

NOTE:

- | | |
|------------------------|---|
| 1. Ag Plated area |  |
| 2. Solder Mask area |  |
| 3. Copper area |  |
| 4. Paste area |  |
| 5. Copper Keepout Area |  |

6. Copper keepout should extend through all PCB layers.

7. Any vias in pads should be either filled or tented to prevent solder from wicking away from the pad during reflow.


8. The dimension tolerances should follow standard PCB manufacturing guidelines

8. Recommended Reflow Soldering Profile

SGGP.12 can be assembled following Pb-free assembly. According to the Standard IPC/JEDEC J-STD-020C, the temperature profile suggested is as follows:

Phase	Profile Features	Pb-Free Assembly (SnAgCu)
PREHEAT	Temperature Min(T_{smin})	150°C
	Temperature Max(T_{smax})	200°C
	Time(t_s) from (T_{smin} to T_{smax})	60-120 seconds
RAMP-UP	Avg. Ramp-up Rate (T_{smax} to T_P)	3°C/second(max)
REFLOW	Temperature(T_L)	217°C
	Total Time above T_L (t_L)	30-100 seconds
PEAK	Temperature(T_P)	260°C
	Time(t_p)	2-5 seconds
RAMP-DOWN	Rate	3°C/second(max)
Time from 25°C to Peak Temperature		8 minutes max.
Composition of solder paste		96.5Sn/3Ag/0.5Cu
Solder Paste Model		SHENMAO PF606-P26

The graphic shows temperature profile for component assembly process in reflow ovens

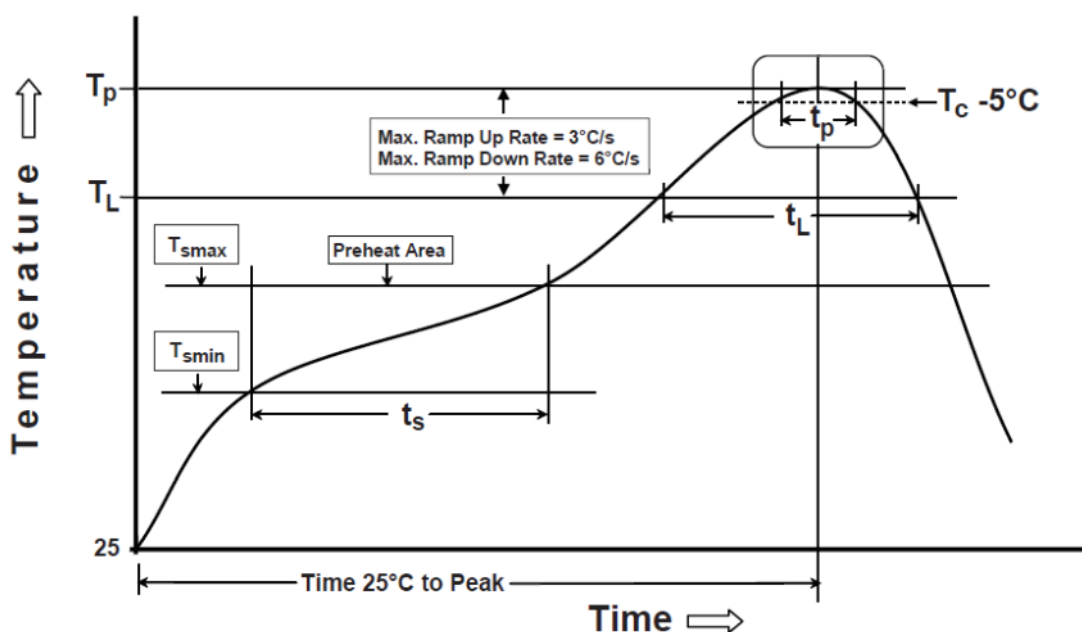

Soldering Iron condition: Soldering iron temperature 270°C±10°C.


Apply preheating at 120°C for 2-3 minutes. Finish soldering for each terminal within 3 seconds, if soldering iron temperature over 270°C±10°C for 3 seconds, it may cause component surface peeling or damage.

9. Packaging

SGGP.25.2.A.02

Packaging Specifications (1/2)


200 pc SGGP.25.2.A.02 per reel
 Dimensions - Ø330*44mm
 Weight - 1.4Kg

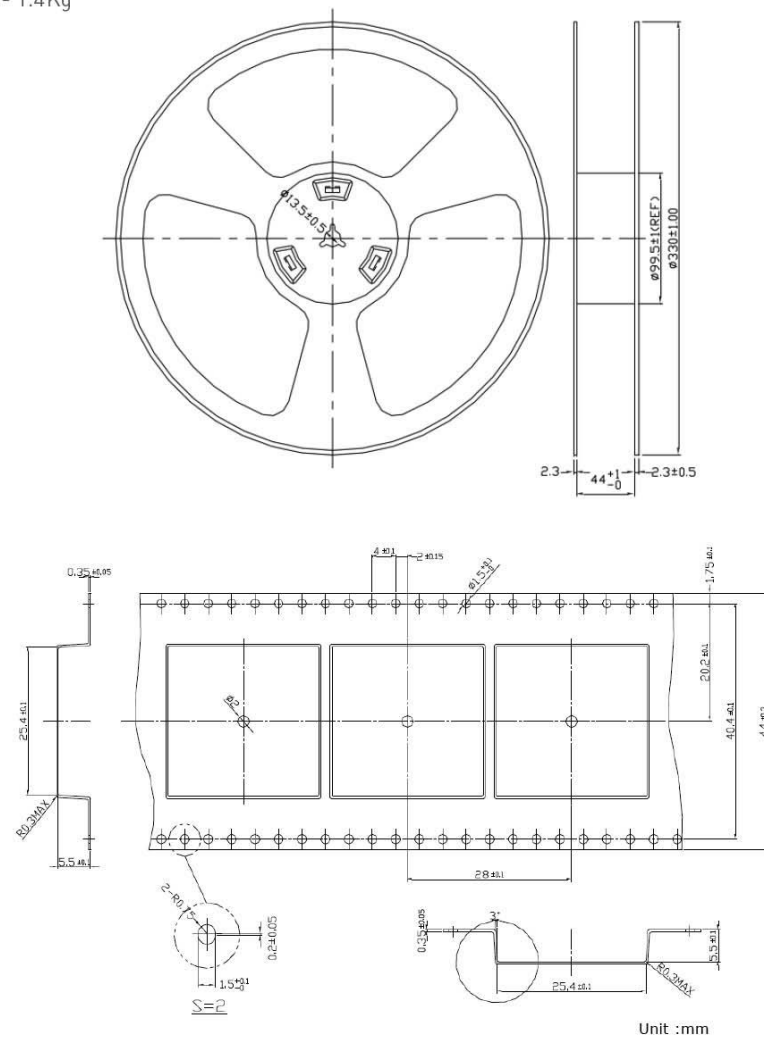


SGGP.25.2.A.02

Packaging Specifications (2/2)


1 pc reel in small inner box
Dimensions - 350*340*70mm
Weight - 1.8Kg

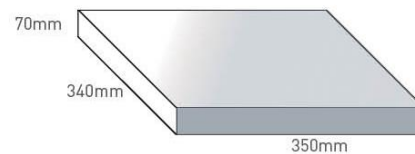

4 Reels / 800 pcs in one carton
Carton Dimensions - 370*360*305mm
Weight - 8Kg

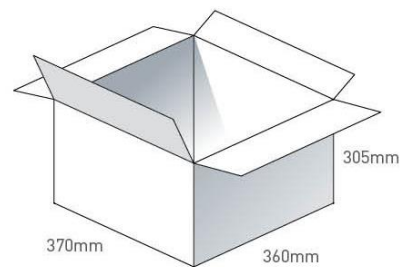

Pallet Dimensions 1100*1220*720mm
24 Cartons per Pallet
4 Cartons per layer
6 Layers

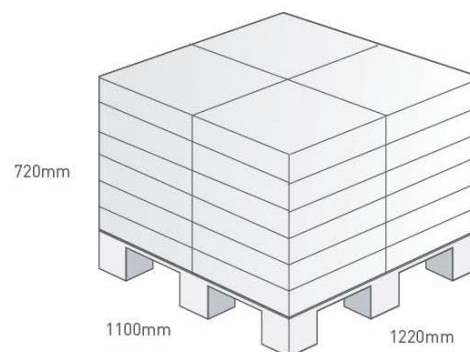

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein.

Reproduction, use or disclosure to third parties without express permission is strictly prohibited.

Copyright © Taoglas Ltd.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru