
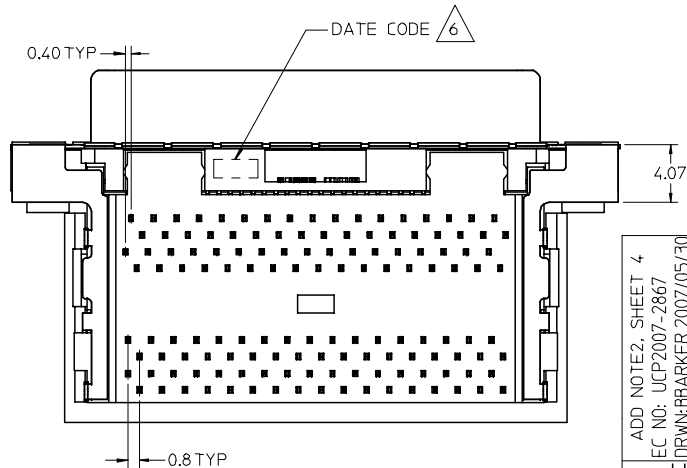
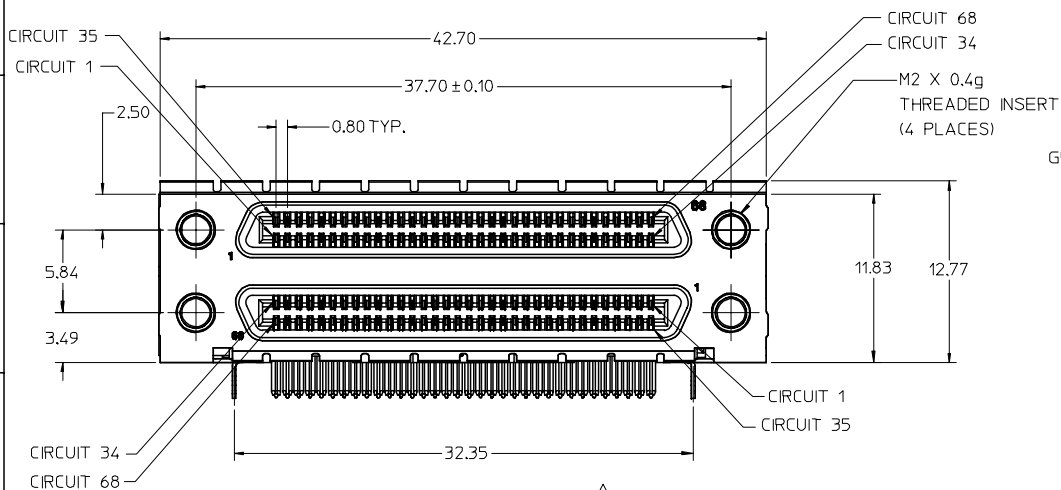


J
I
H
G
F
E
D
C
B
A

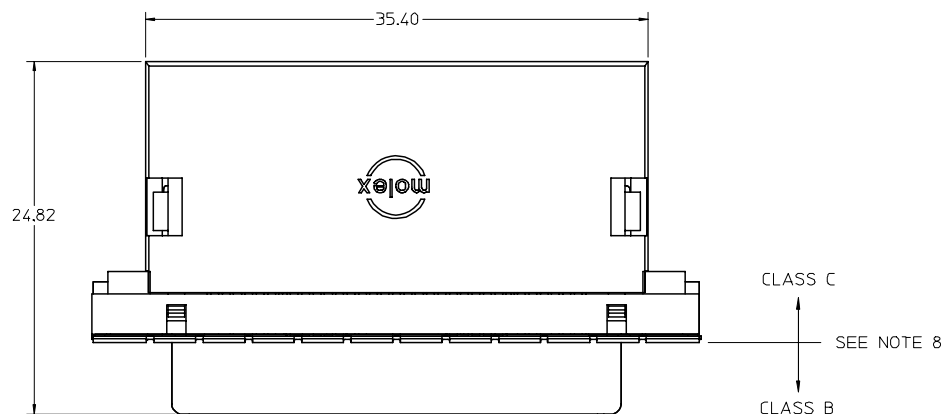

NOTES:

1. MATERIALS:

HOUSING, COVER, AND TAIL ALIGNER: HIGH TEMPERATURE THERMOPLASTIC, UL94, V-0 RATED, COLOR: BLACK
TERMINAL: PHOSPHOR BRONZE ALLOY
BRACKET: BRASS
SHELL: STEEL
INSERT: BRASS

2. FINISHES:

TERMINAL: 0.05-0.25 MICROMETERS GOLD FLASH IN CRITICAL AREA OVER 0.75 MICROMETERS MINIMUM PALLADIUM NICKEL IN CRITICAL AREA, 1.87 MICROMETERS MINIMUM TIN IN SOLDER TAIL AREA, ALL OVER NICKEL.
BRACKET: 5.0 MICROMETERS MINIMUM BRIGHT TIN.
SHIELD: 3.81 MICROMETERS MINIMUM BRIGHT TIN OVER 1.27 MICROMETERS MINIMUM NICKEL OVER COPPER FLASH (OPTIONAL).
INSERT: 2.54 MICROMETERS MINIMUM NICKEL.

3. PRODUCT SPECIFICATION: PS-71425-9999.



4. PACKAGING SPECIFICATION: TRAY PACK PER PK-74337-001.

5. APPLICABLE STANDARDS: EIA-700AAAF AND SFF-8441.

△ DATE CODE: YR/WK PER EIA-476-A.

7. TORQUE TO INSTALL SCREWLOCKS INTO THREADED INSERTS: 0.37 Nm MAXIMUM

8. PRODUCT COMPLIES WITH COSMETIC SPECIFICATION PS-45499-002. SEE TOP VIEW FOR SURFACE CLASSIFICATIONS.

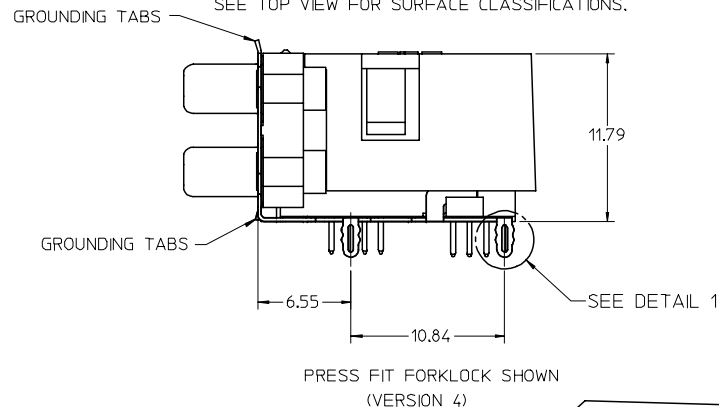

WITH COVER OPTION

ADD NOTE2, SHEET 4
EC NO: UCP2007-2867
DRWN: BBARKER 2007/05/30
CHKD: SDANIEL 2007/05/30
APPR: SMILLER 2007/06/01

QUALITY SYMBOLS
DESCRIPTION
REV

GENERAL TOLERANCES (UNLESS SPECIFIED)		
	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± ---
2 PLACES	± 0.13	± ---
1 PLACE	± 0.25	± ---
ANGULAR ± 1 °		
DRAFT WHERE APPLICABLE		
MUST REMAIN WITHIN DIMENSIONS		



SCALE 3:1	DESIGN UNITS METRIC
DIMENSION STYLE MM ONLY	
DRAWN BY RKADAMS	DATE 04/8/27
CHECKED BY BBARKER	DATE 04/8/27
APPROVED BY SMILLER	DATE 04/8/27

THIRD ANGLE PROJECTION	REVISE ON CAD ONLY
TITLE SALES ASSEMBLY VHDCI STACKED	
MOLEX INCORPORATED	
MATERIAL NO. SEE TABLE	DOCUMENT NO. SD-74337-004
SHEET NO. 1 OF 4	




12 11 10 9 8 7 6 5 4 3 2 74337

J
I
H
G
F
E
D
C
B
A

J
I
H
G
F
E
D
C
B
A

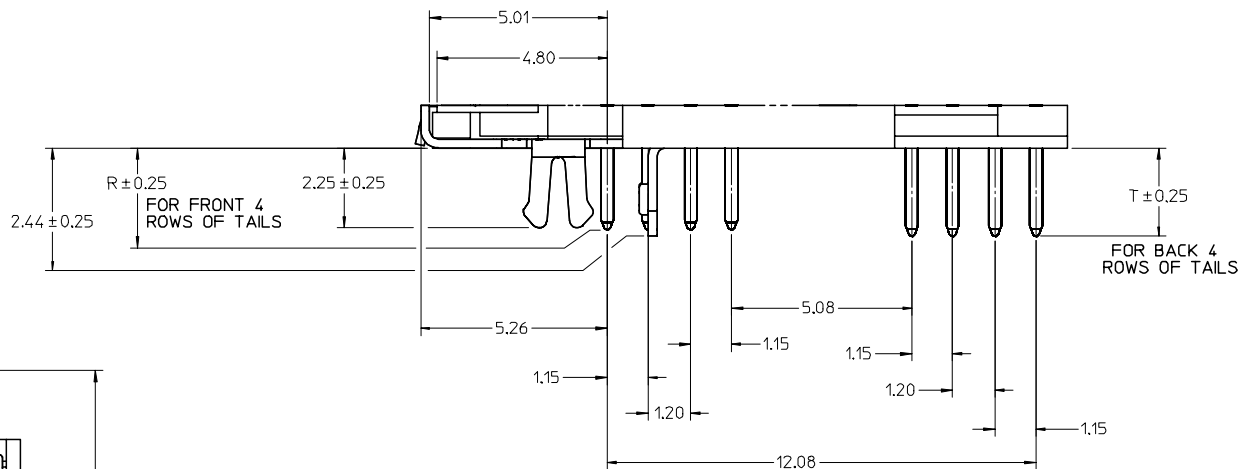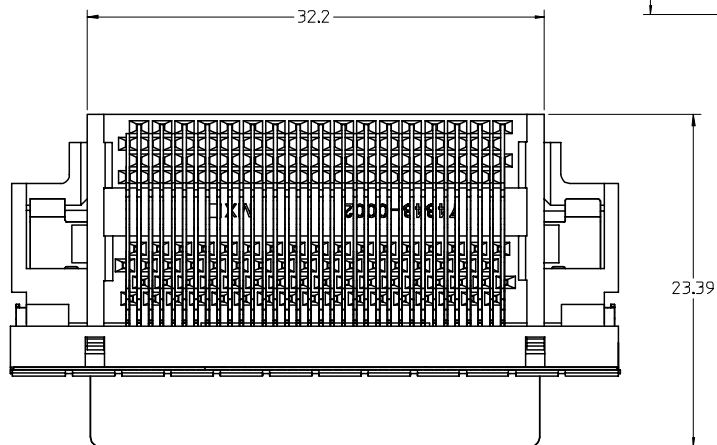

Detail1
SCALE 10:1

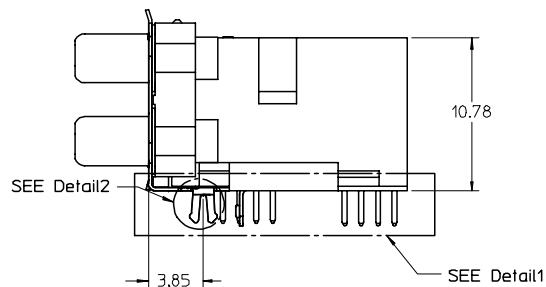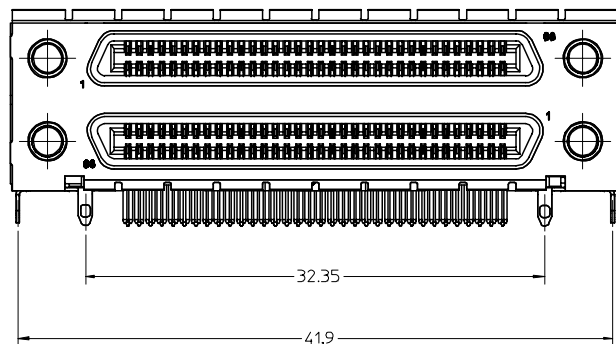

WITHOUT COVER OPTION


UPDATE REV LEVEL	DESCRIPTION	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	
			mm	INCH
EC NO: UCP2007-2867	DRAWN: BBARKER 2007/05/30 CHKD: SDANNELL 2007/05/30 APPR: SMILLER 2007/06/01	▽=0	4 PLACES ± ---	± ---
			3 PLACES ± ---	± ---
			2 PLACES ± 0.13	± ---
			1 PLACE ± 0.25	± ---
		∇=0	ANGULAR ± 1 °	
			DRAFT WHERE APPLICABLE	
			MUST REMAIN WITHIN DIMENSIONS	
			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	

GENERAL TOLERANCES (UNLESS SPECIFIED)			SCALE 4:1	DESIGN UNITS METRIC
	mm	INCH	DIMENSION STYLE	
4 PLACES	± ---	± ---	MM ONLY	
3 PLACES	± ---	± ---	DRAWN BY	DATE
2 PLACES	± 0.13	± ---	RKADAMS	04/8/27
1 PLACE	± 0.25	± ---	CHECKED BY	DATE
ANGULAR ± 1 °			BBARKER	04/8/27
DRAFT WHERE APPLICABLE			APPROVED BY	DATE
MUST REMAIN WITHIN DIMENSIONS			SMILLER	04/8/27
THIS DRAWING CONTAINS INCORPORATED AND SHOU				

 THIRD ANGLE PROJECTION		REVISE ON CAD ONLY	
TITLE			
SALES ASSEMBLY VHDCI STACKED			
MOLEX INCORPORATED			
MATERIAL NO.		DOCUMENT NO.	
SEE TABLE		SD-74337-004	
SHEET NO.		2 OF 4	
INFORMATION THAT IS PROPRIETARY TO MOLEX SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
			

11 10 9 8 7 6 5 4 3 2 1


VERSION 1 PART NUMBERS

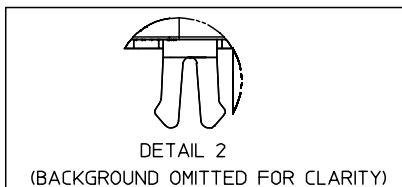

BOARD RETENTION: SNAP FIT

PCB THICKNESS	COVER	R DIM.	T DIM.	INCLUDES LOOSE PACKED SCREWLOCKS 71433-0002 SEE DRAWING SD-71433-005	GROUNDING TABS	PART NUMBER
1.60±0.16	YES	2.30	2.48	NO	YES	74337-0911
1.60±0.16	YES	2.08		NO	YES	74337-0912
1.60±0.16	NO	2.30	2.48	NO	YES	74337-0915
1.60±0.16	NO	2.08		NO	YES	
1.60±0.16	YES	2.30	2.48	YES	YES	
1.60±0.16	YES	2.08		YES	YES	
1.60±0.16	NO	2.30	2.48	YES	YES	
1.60±0.16	NO	2.08		YES	YES	
2.36±0.16	YES	3.44	3.62	NO	YES	
2.36±0.16	NO	3.44	3.62	NO	YES	
2.36±0.16	YES	3.44	3.62	YES	YES	74337-0972
2.36±0.16	NO	3.44	3.62	YES	YES	
1.60±0.16	YES	2.08		INSTALLED ON PART	YES	

VERSION 4 PART NUMBERS

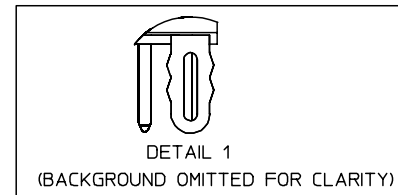

BOARD RETENTION: PRESS FIT

PCB THICKNESS	COVER	R DIM.	T DIM.	INCLUDES LOOSE PACKED SCREWLOCKS 71433-0002 SEE DRAWING SD-71433-005	GROUNDING TABS	PART NUMBER
1.60±0.16	YES	2.30	2.48	NO	YES	
1.60±0.16	YES	2.08		NO	NO	74337-0951
1.60±0.16	NO	2.30	2.48	NO	YES	
1.60±0.16	NO	2.08		NO	YES	
1.60±0.16	YES	2.08		NO	YES	
1.60±0.16	YES	2.30	2.48	YES	YES	
1.60±0.16	YES	2.08		YES	YES	
1.60±0.16	NO	2.30	2.48	YES	YES	
1.60±0.16	NO	2.08		YES	YES	
2.36±0.16	YES	3.44	3.62	NO	YES	74337-0952
2.36±0.16	NO	3.44	3.62	NO	YES	
2.36±0.16	YES	3.44	3.62	YES	YES	
2.36±0.16	NO	3.44	3.62	YES	YES	
1.60±0.16	YES	2.08		INSTALLED ON PART	YES	



OPTIONAL SCREWLOCK
71433-0002



UPDATE REV LEVEL
EC NO: UCP2007-2867
DRWN: BBARKER 2007/05/30
CHKD: SDANNELL 2007/05/30
APPR: SMILLER 2007/06/01

QUALITY SYMBOLS
▽ = 0
▽ = 0

GENERAL TOLERANCES (UNLESS SPECIFIED)
mm INCH
4 PLACES ± --- ± ---
3 PLACES ± --- ± ---
2 PLACES ± 0.13 ± ---
1 PLACE ± 0.25 ± ---
ANGULAR ± 1 °
DRAFT WHERE APPLICABLE
MUST REMAIN WITHIN DIMENSIONS

SCALE 3:1
DESIGN UNITS METRIC
DIMENSION STYLE MM ONLY
DRAWN BY DATE
RKADAMS 04/8/27
CHECKED BY DATE
BBARKER 04/8/27
APPROVED BY DATE
SMILLER 04/8/27
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

THIRD ANGLE PROJECTION
REVISE ON CAD ONLY
TITLE
SALES ASSEMBLY
VHDCI STACKED
MOLEX INCORPORATED
MATERIAL NO. SEE TABLE
DOCUMENT NO. SD-74337-004
SHEET NO. 3 OF 4

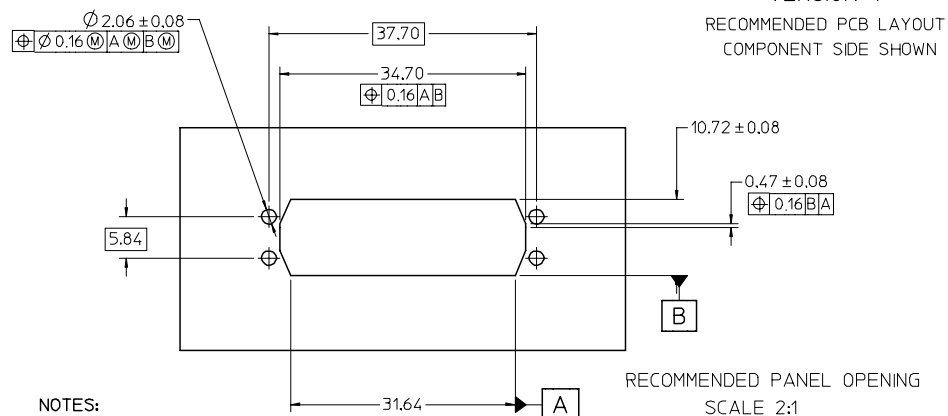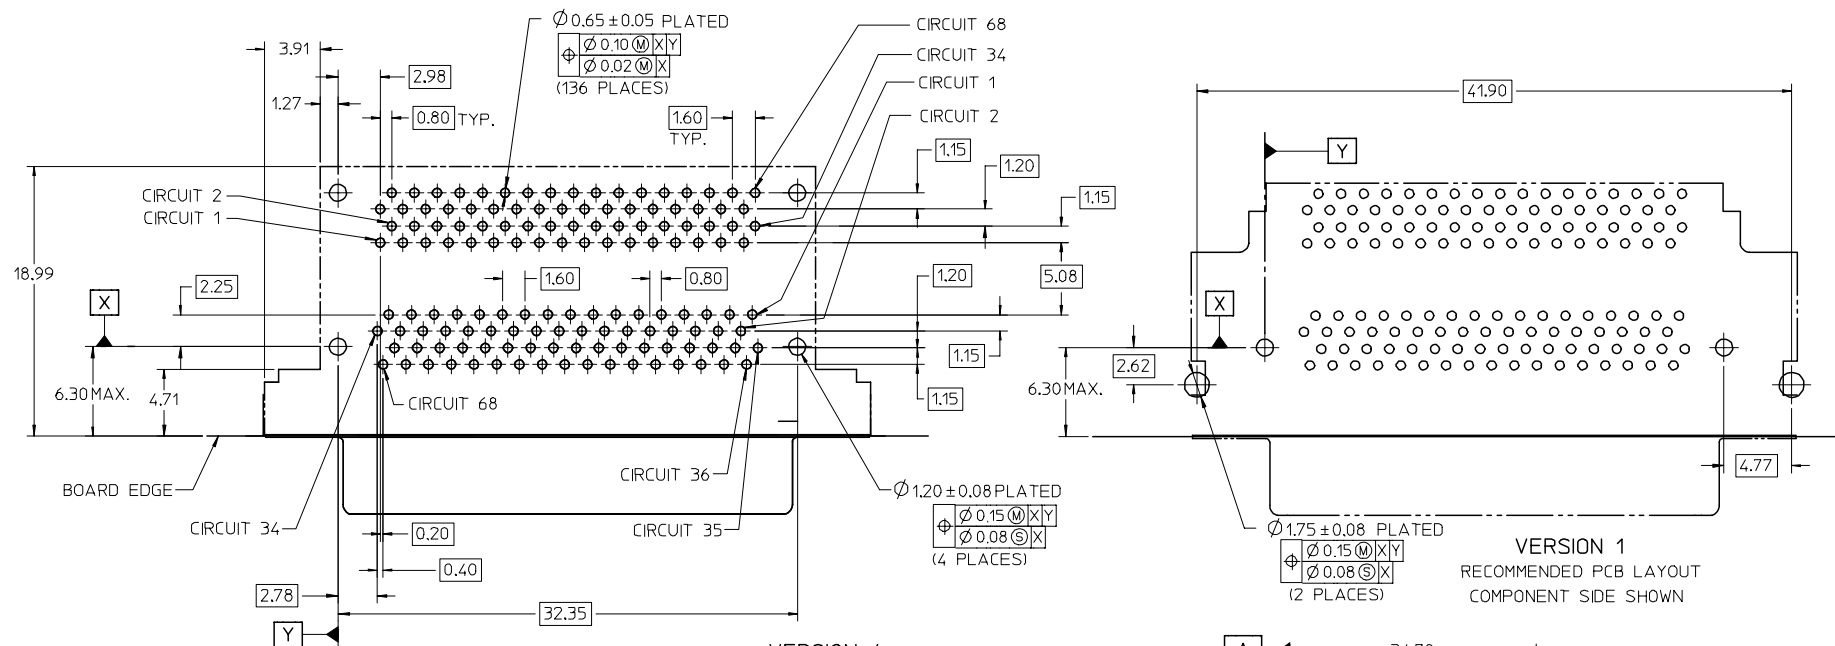


NOTES:

1. FOR FULL MATE WITH PLUG, PANEL THICKNESS SHOULD NOT EXCEED 1.0mm.

FUNCTIONAL MATING WITH MOLEX PLUG CAN STILL BE MAINTAINED WITH PANELS AS THICK AS 2.5mm (BUT PLUG AND RECEPTACLE WILL NOT BE FULLY MATED).

2. GUIDELINES FOR CHOOSING A MOLEX SCREWLOCK:

PANEL THICKNESS	RECOMMENDED SCREWLOCK
LESS THAN OR EQUAL TO 1.00 MM	71433-0002
1.01 TO 2.15 MM	71433-0010

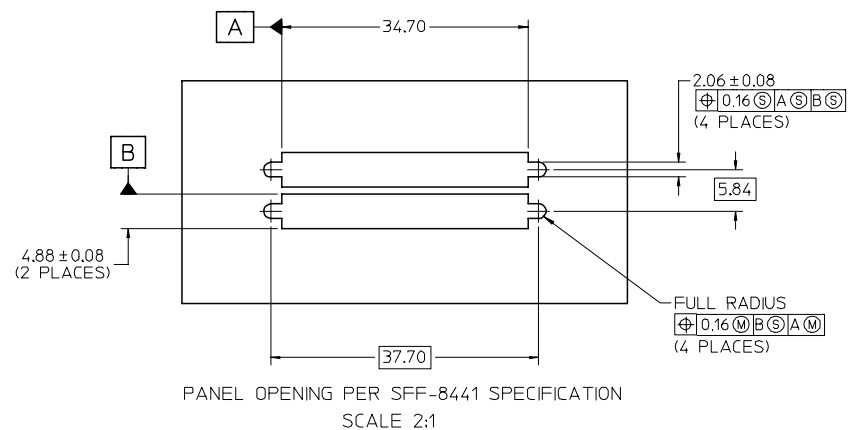

ADD NOTE 2 EC NO: UCP2007-2867 DRWN:BBARKER 2007/05/30 CHKD:SDANNEL2007/05/30 APPR:SMILLER 2007/06/01	DESCRIPTION	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		SCALE 3:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		REVISE ON CAD ONLY		
				mm	INCH	DIMENSION STYLE MM ONLY		TITLE SALES ASSEMBLY VHDCI STACKED			
			4 PLACES	± ---	± ---	DRAWN BY RKADAMS		DATE 04/8/27		MOLEX INCORPORATED	
			3 PLACES	± ---	± ---	CHECKED BY BBARKER		DATE 04/8/27			
			2 PLACES	± 0.13	± ---	APPROVED BY SMILLER		DATE 04/8/27			
			1 PLACE	± 0.25	± ---						
			ANGULAR ± 1 °								
		DRAFT WHERE APPLICABLE									
		MUST REMAIN WITHIN DIMENSIONS									

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru