

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0878240003](#)
Status: **Active**
Description: 1.27mm (.050") Signal Pitch, 0.80mm (.031") SCSI Pitch, 1.27mm (.050") Power Pitch
SAS Receptacle, Vertical, Surface Mount, with Straight Solder Tab, 1.6mm (.062") PCB
Thickness, 29 Circuits, with Cap, Tray, Leadfree

Documents:

[3D Model](#) [Product Specification PS-87824-029 \(PDF\)](#)
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification


CSA LR19980
UL E29179

General

Product Family I/O Connectors
Series [87824](#)
Application Board-to-Board
Comments With Pick-and-Place Cap
Component Type Receptacle
Product Name SAS
Type N/A

Physical

Boot Color N/A
Circuits (Loaded) 29
Circuits (maximum) 29
Circuits Detail Signal 7, SCSI 7, Power 15
Color - Resin Black
Durability (mating cycles max) 500
Flammability 94V-0
Gender Female
Keying to Mating Part Yes
Lock to Mating Part None
Material - Metal Copper Alloy
Material - Plating Mating Gold, Tin
Material - Plating Termination Tin
Material - Resin High Temperature Thermoplastic
Number of Rows 2
Orientation Vertical
PCB Locator Yes
PCB Retention Yes
PCB Thickness Recommended (in) 0.063 In
PCB Thickness Recommended (mm) 1.60 mm
Packaging Type Tray
Panel Mount Yes
Pitch - Mating Interface (in) 0.031 In, 0.050 In
Pitch - Mating Interface (mm) 0.80 mm, 1.27 mm
Pitch - Term. Interface (in) 0.031 In, 0.050 In
Pitch - Term. Interface (mm) 0.80 mm, 1.27 mm
Plating min: Mating (µin) 30
Plating min: Mating (µm) 0.76
Plating min: Termination (µin) 102
Plating min: Termination (µm) 2.54
Polarized to Mating Part Yes
Polarized to PCB Yes

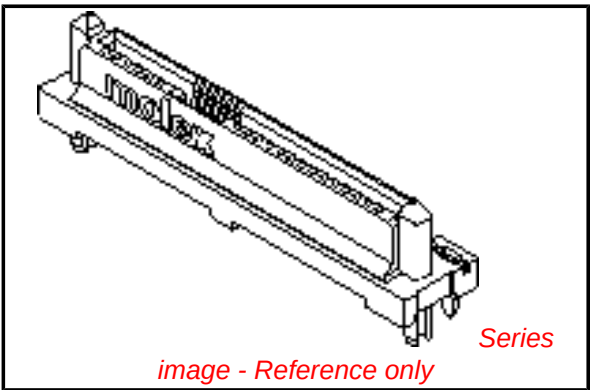

EU RoHS

**ELV and RoHS
Compliant**

REACH SVHC

Not Reviewed

Halogen-Free

Status

Not Halogen-Free

China RoHS



**Need more information on product
environmental compliance?**

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of
Compliance, [click here](#)

Please visit the [Contact Us](#) section for any
non-product compliance questions.

Search Parts in this Series

[87824Series](#)

Mates With

SFF-8482 Hard Disk Drive and Backplane
Plug. [87679](#) Serial ATA Device Plug with
Latch. [87703](#) Serial ATA Device Plug
without Jumper. [87799](#) Serial ATA Device
Plug with Jumper

Surface Mount Compatible (SMC)	N/A
Temperature Range - Operating	0°C to +55°C
Termination Interface: Style	Surface Mount
Waterproof / Dustproof	No
Wire Size AWG	N/A

Electrical

Current - Maximum per Contact	1.5A
Shielded	No
Voltage - Maximum	30V

Solder Process Data

Duration at Max. Process Temperature (seconds)	10
Lead-free Process Capability	Reflow Capable (SMT only)
Max. Cycles at Max. Process Temperature	1
Process Temperature max. C	260


Material Info

Reference - Drawing Numbers


Product Specification	PS-87824-029
Sales Drawing	SD-87824-027

This document was generated on 04/09/2010


PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

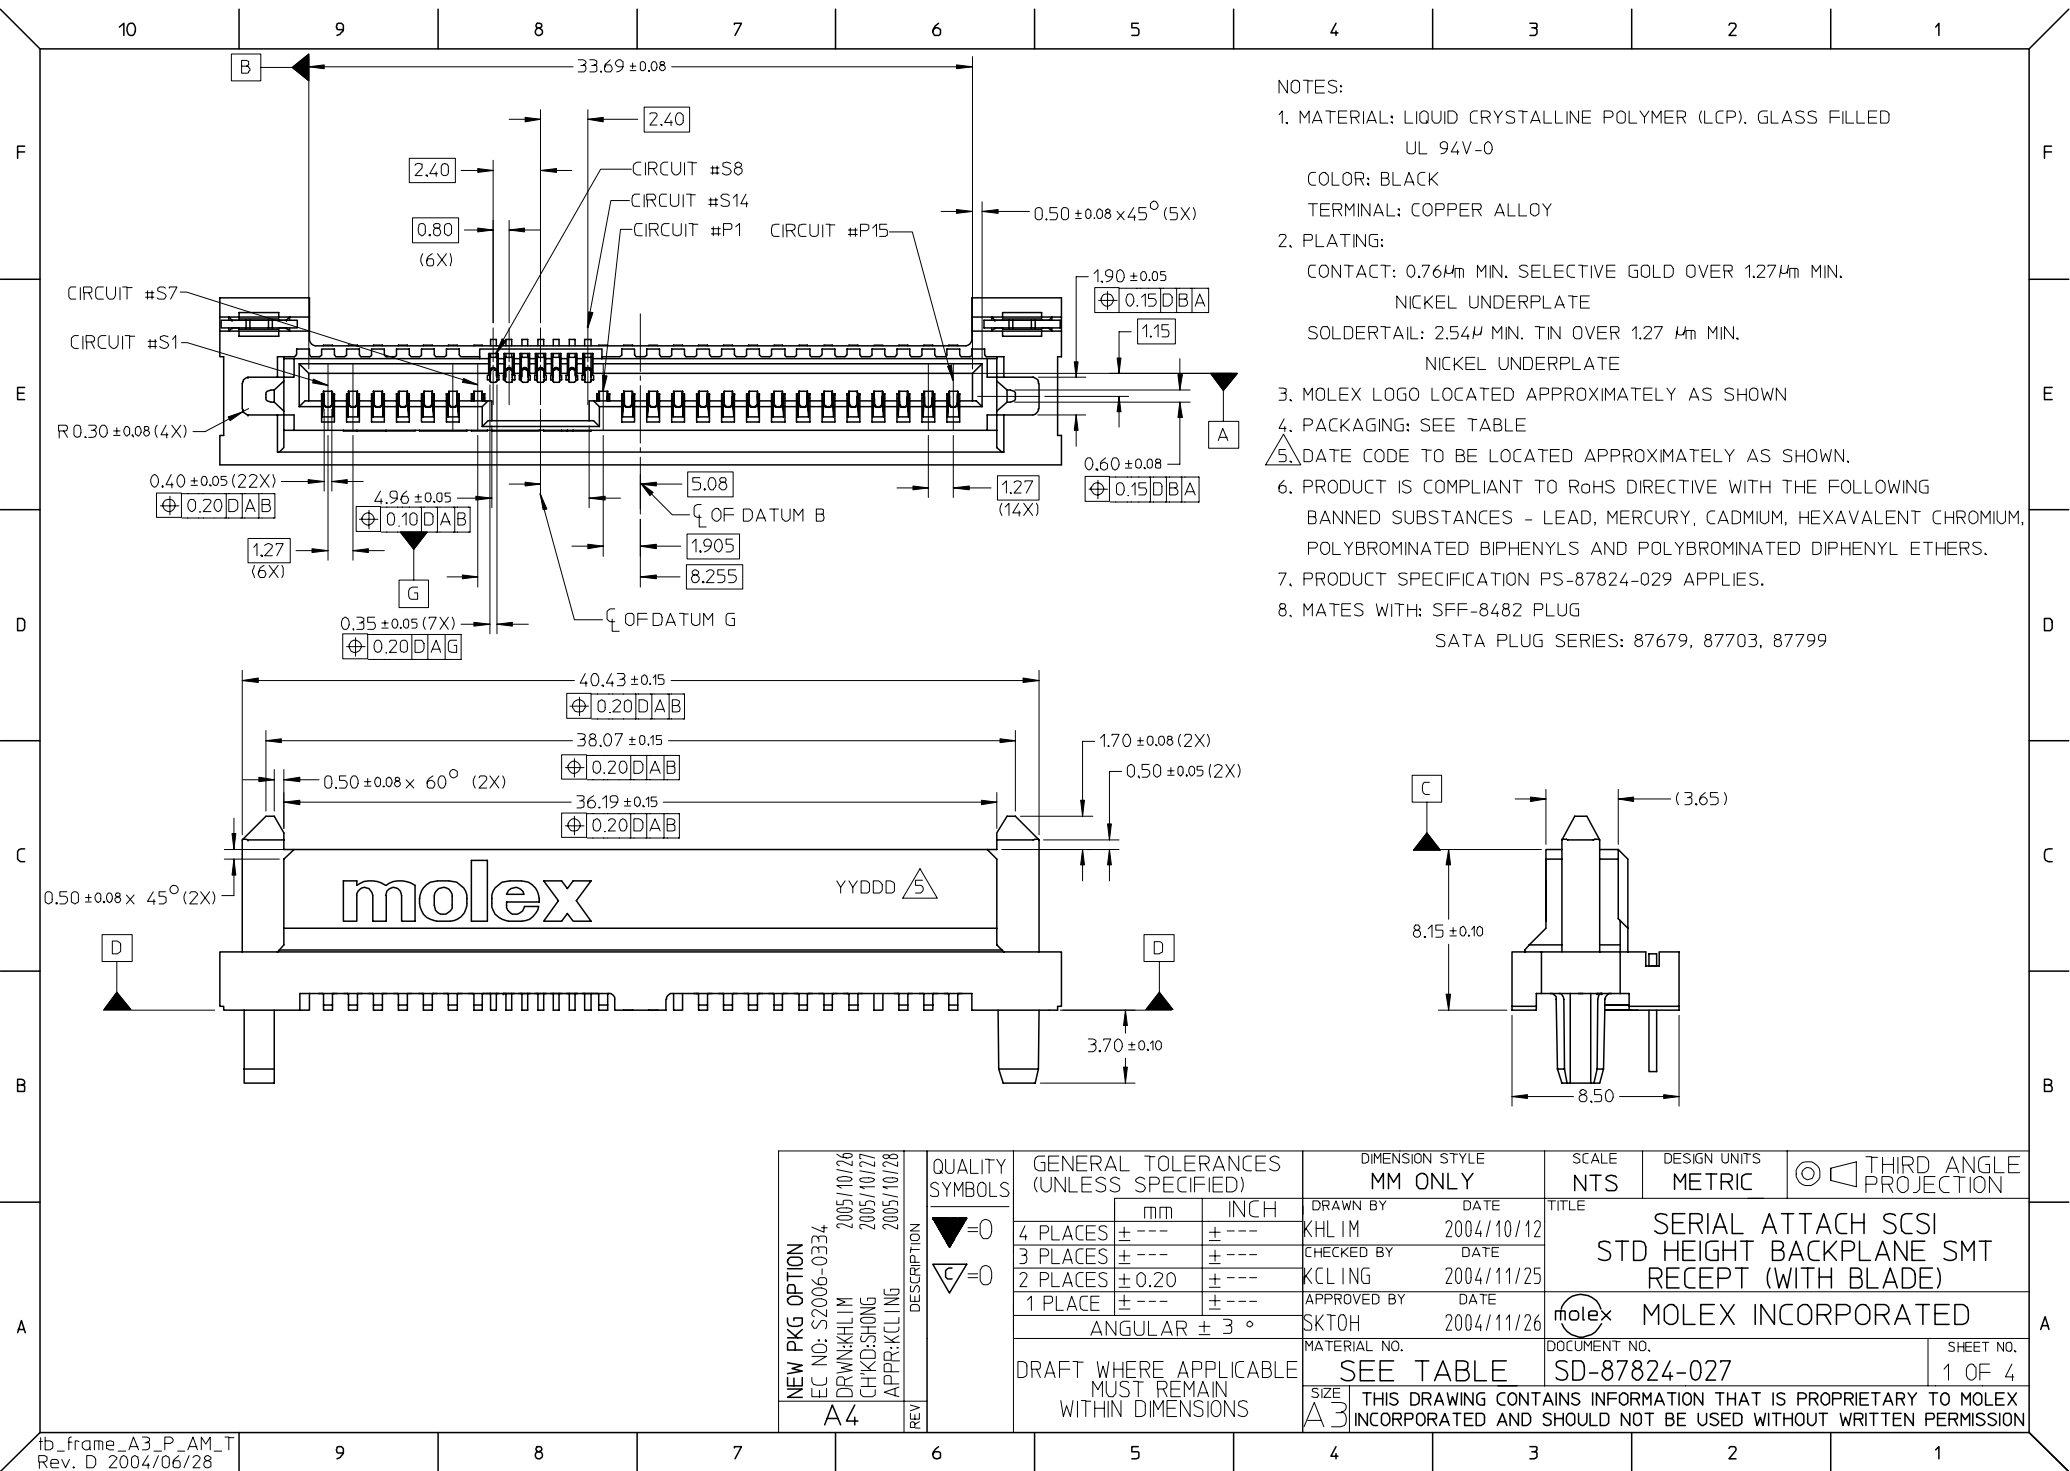


- NOTES:
1. MATERIAL: LIQUID CRYSTALLINE POLYMER (LCP). GLASS FILLED UL 94V-0
COLOR: BLACK
TERMINAL: COPPER ALLOY
 2. PLATING:
CONTACT: 0.76µm MIN. SELECTIVE GOLD OVER 1.27µm MIN.
NICKEL UNDERPLATE
SOLDERTAIL: 2.54µ MIN. TIN OVER 1.27 µm MIN.
NICKEL UNDERPLATE
 3. MOLEX LOGO LOCATED APPROXIMATELY AS SHOWN
 4. PACKAGING: SEE TABLE
 5. DATE CODE TO BE LOCATED APPROXIMATELY AS SHOWN.
 6. PRODUCT IS COMPLIANT TO RoHS DIRECTIVE WITH THE FOLLOWING BANNED SUBSTANCES - LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, POLYBROMINATED BIPHENYLS AND POLYBROMINATED DIPHENYL ETHERS.
 7. PRODUCT SPECIFICATION PS-87824-029 APPLIES.
 8. MATES WITH: SFF-8482 PLUG
SATA PLUG SERIES: 87679, 87703, 87799




NEW PKG OPTION EC NO: S2006-0334 DRWN:KHLIM CHKD:SHONG APPR:KCLING A4	REV	DESCRIPTION	QUALITY SYMBOLS ▽=0 ▽C=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE NTS	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
				mm	INCH	DRAWN BY KHLIM	DATE 2004/10/12	TITLE SERIAL ATTACH SCSI STD HEIGHT BACKPLANE SMT RECEPT (WITH BLADE)				
				4 PLACES	± ---	± ---	CHECKED BY KCLING					DATE 2004/11/25
				3 PLACES	± ---	± ---	APPROVED BY SKTOH	DATE 2004/11/26	MOLEX INCORPORATED			
				2 PLACES	± 0.20	± ---	ANGULAR ± 3 °		MATERIAL NO.			
				1 PLACE	± 0.00	± ---	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE		DOCUMENT NO. SD-87824-027	SHEET NO. 1 OF 4
				SIZE A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						

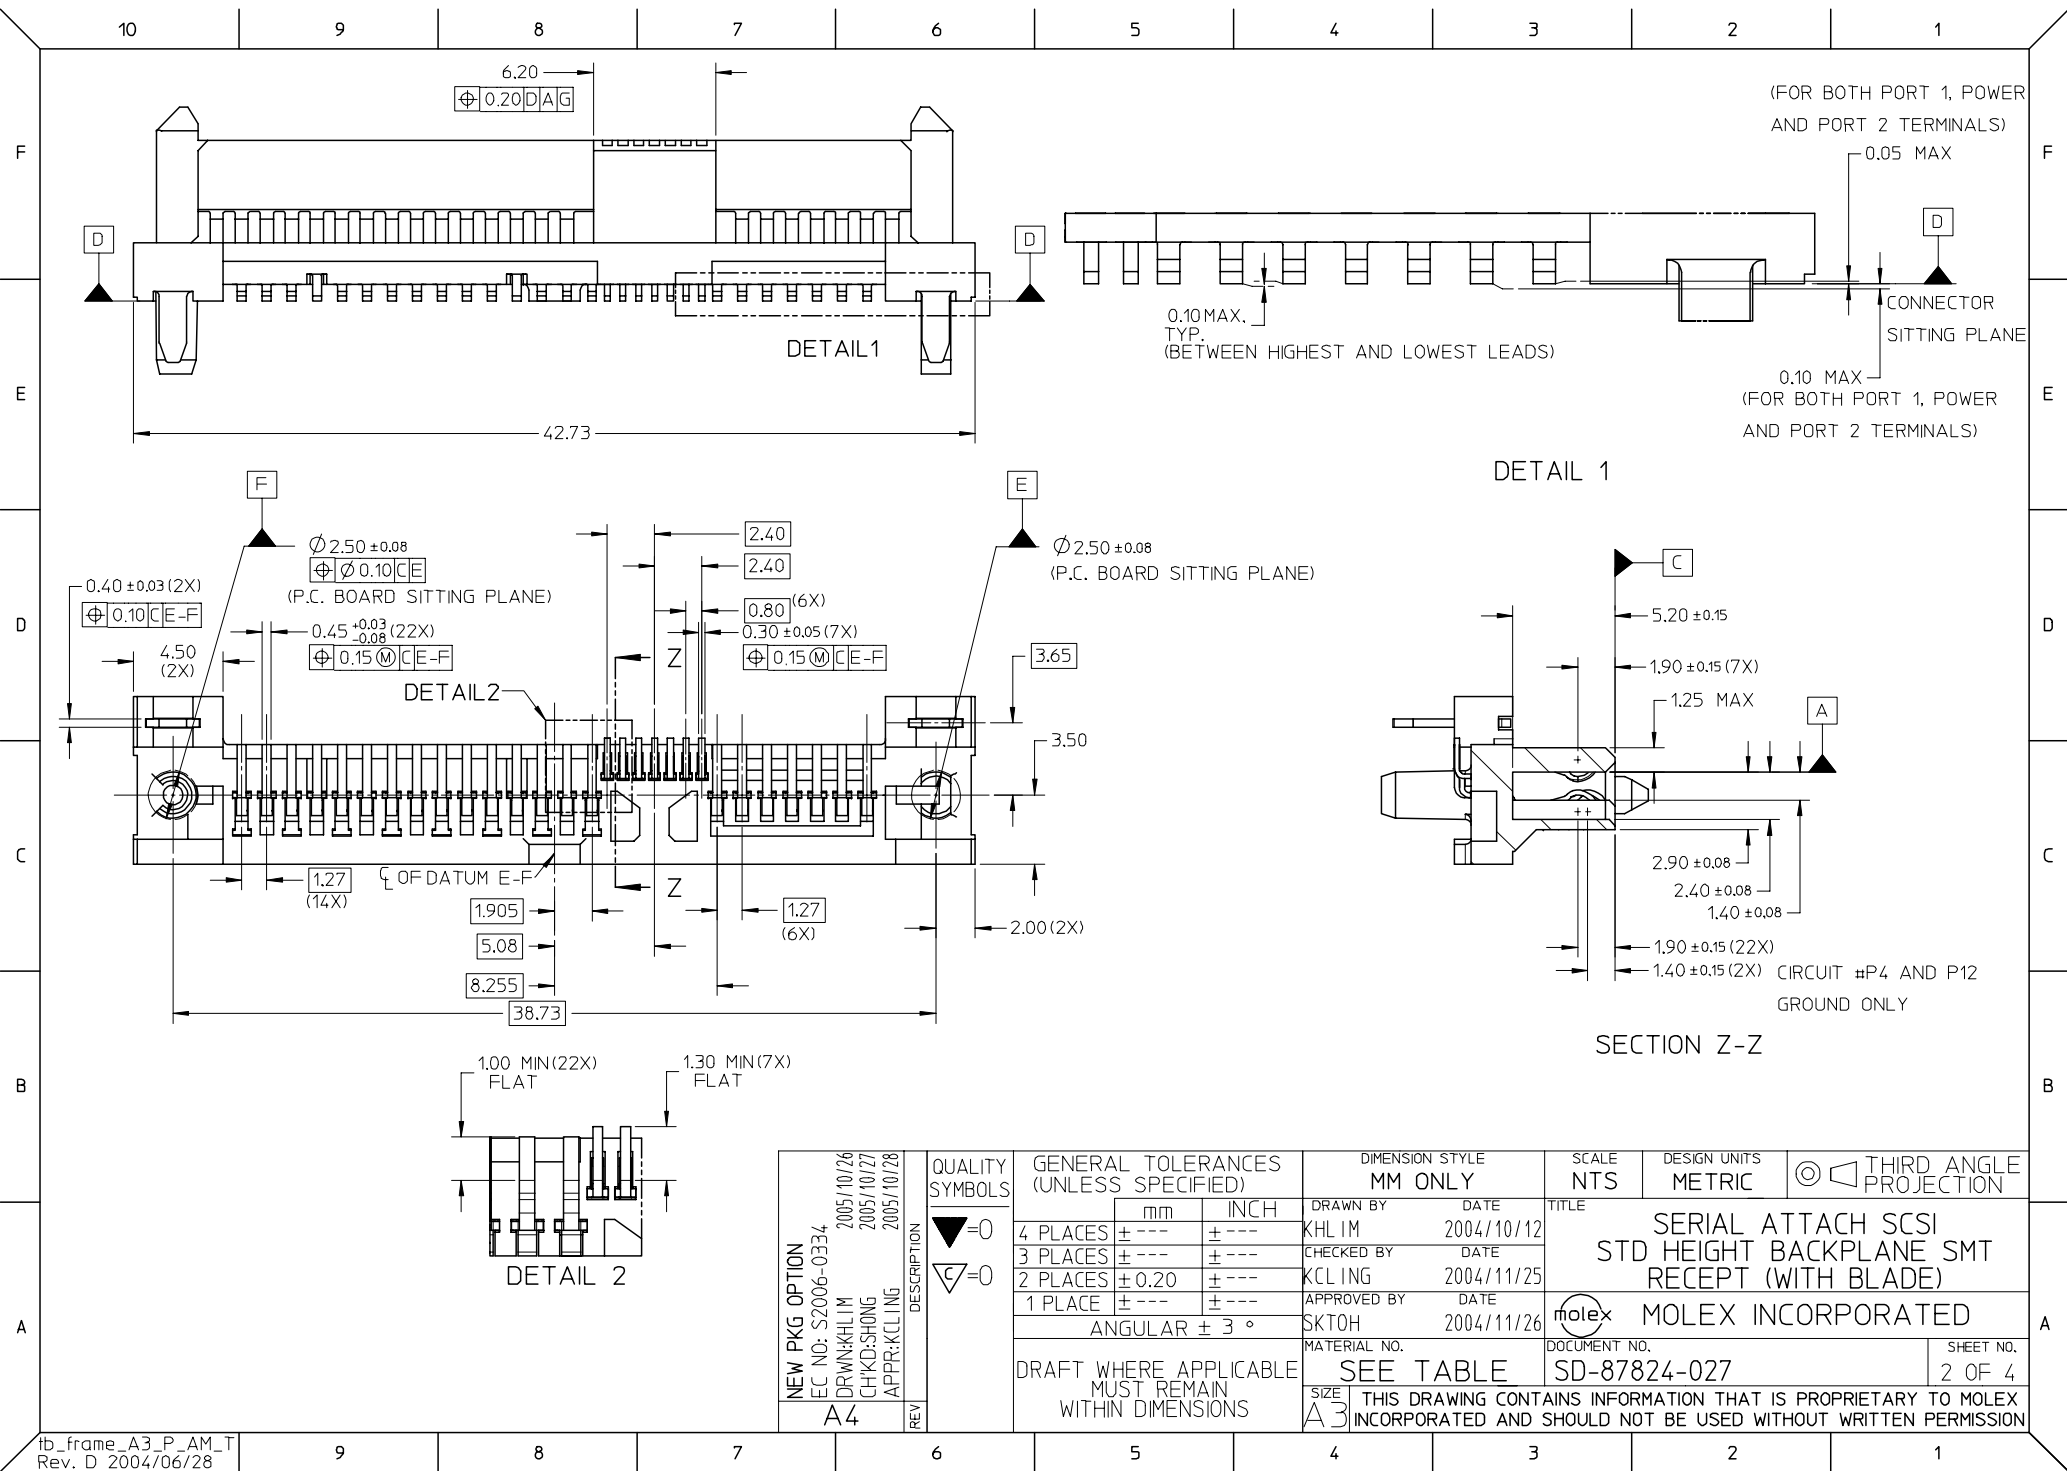


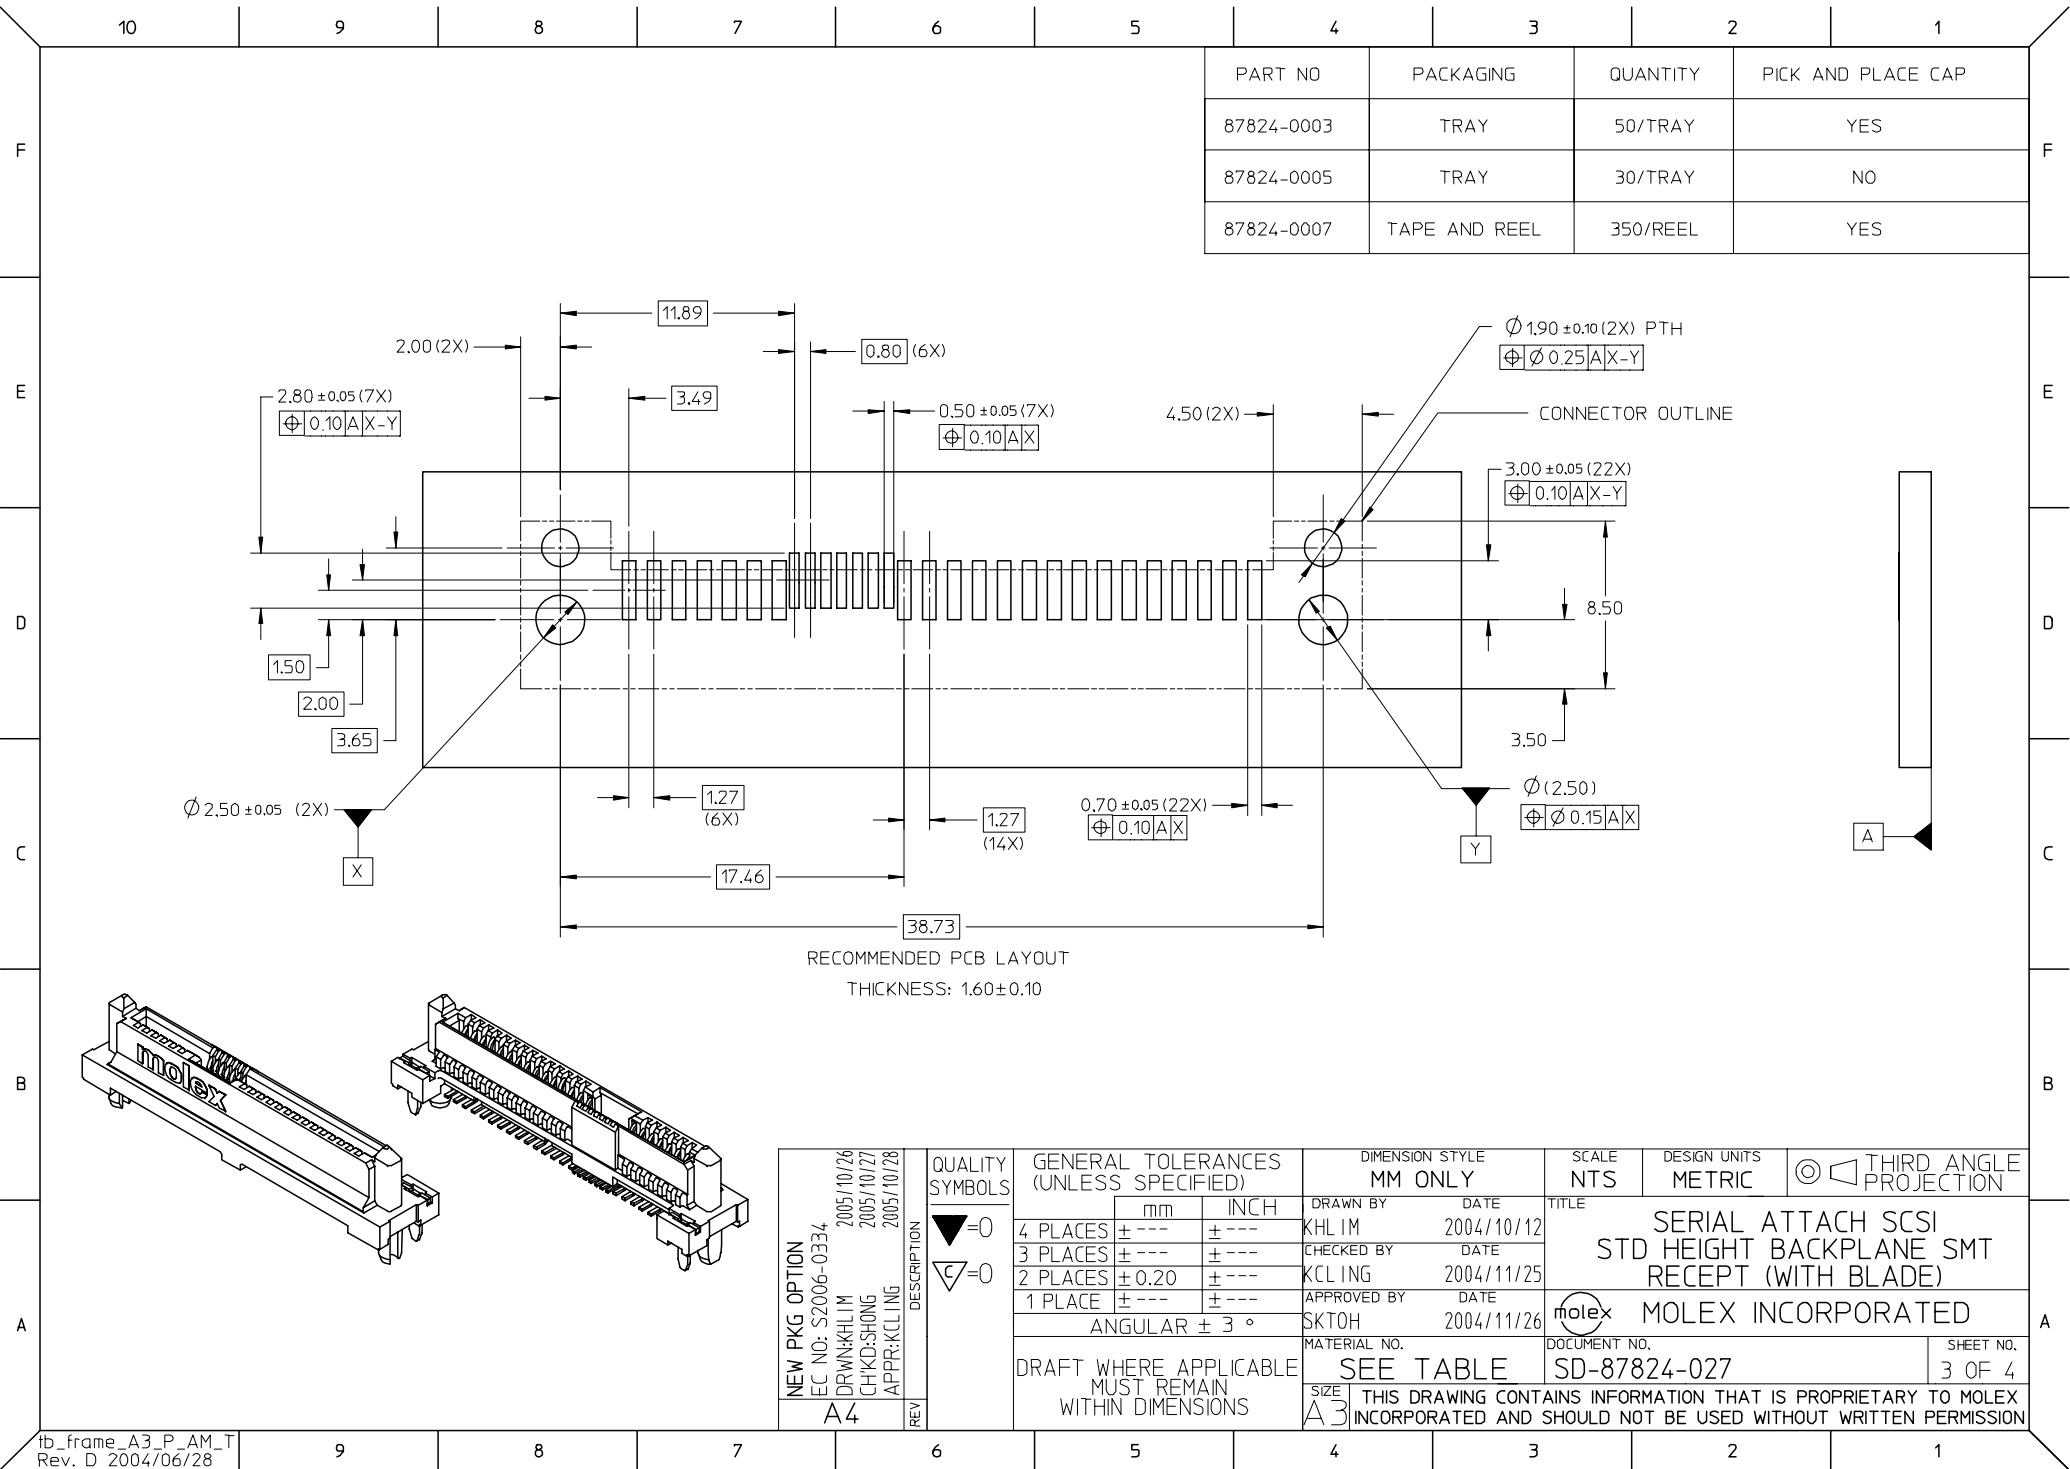

TAPE AND REEL PACKAGING

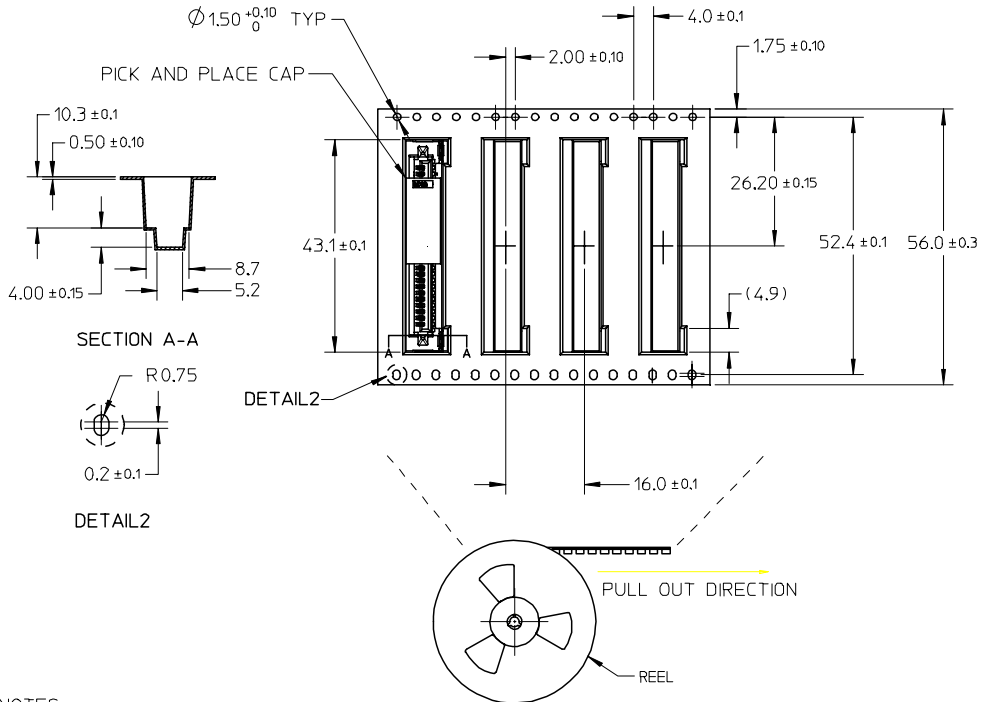


TRAY PACKAGING

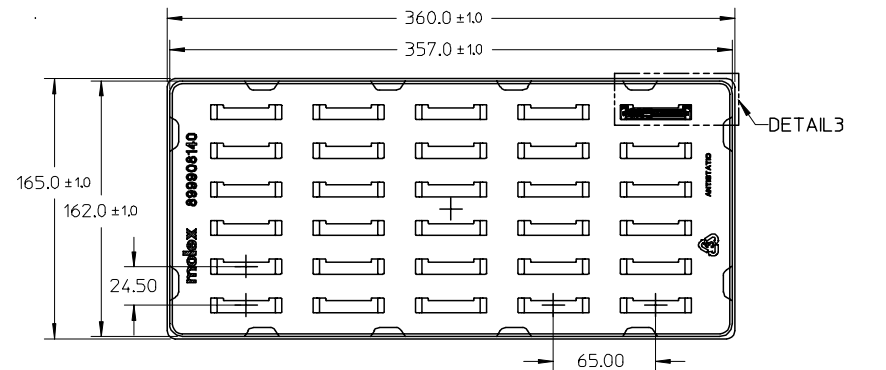

NOTES:


1. PACKAGING QTY: 30PCS/TRAY
2. NO PICK AND PLACE CAP

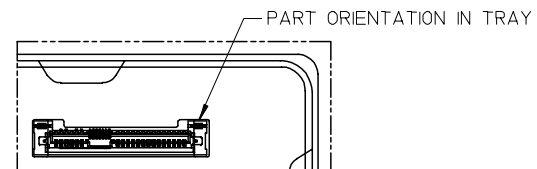


DETAIL3

- NOTES:

- ## 1. LEADER AND TRAILER TAPE

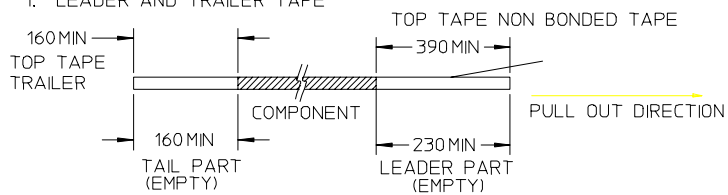

2. PEELING OFF FORCE OF THE TOP TAPE: 80gf MAX.
(PEELING DIRECTION AS SHOWN IN FOLLOWING FIGURE)



3. PACKAGING QTY: 350 PCS/REEL
4. PACKAGING STANDARD IS AS PER EIA-481.
5. CONNECTOR COMES WITH PICK AND PLACE CAP.

NEW PKG OPTION EC NO: S2006-0334 DRAWN:KHLIM CHK'D:SHONG APPR:KCLING	2005/10/26	QUALITY SYMBOLS ▽=0 ▽=0	DESCRIPTION APPR:KCLING	GENERAL TOLERANCES (UNLESS SPECIFIED) <table><tr><td></td><td>mm</td><td>INCH</td></tr><tr><td>4 PLACES</td><td>± ---</td><td>± ---</td></tr><tr><td>3 PLACES</td><td>± ---</td><td>± ---</td></tr><tr><td>2 PLACES</td><td>± 0.20</td><td>± ---</td></tr><tr><td>1 PLACE</td><td>± ---</td><td>± ---</td></tr><tr><td colspan="3">ANGULAR ± 3 °</td></tr></table>		mm	INCH	4 PLACES	± ---	± ---	3 PLACES	± ---	± ---	2 PLACES	± 0.20	± ---	1 PLACE	± ---	± ---	ANGULAR ± 3 °			DIMENSION STYLE MM ONLY DRAWN BY KHLIM DATE 2004/10/12 CHECKED BY KCLING DATE 2004/11/25 APPROVED BY SKTOH DATE 2004/11/26 MATERIAL NO. SEE TABLE	SCALE NTS	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION	TITLE SERIAL ATTACH SCSI STD HEIGHT BACKPLANE SMT RECEPT (WITH BLADE) MOLEX INCORPORATED DOCUMENT NO. SD-87824-027 SHEET NO. 4 OF 4
					mm	INCH																					
	4 PLACES				± ---	± ---																					
	3 PLACES				± ---	± ---																					
	2 PLACES				± 0.20	± ---																					
1 PLACE	± ---	± ---																									
ANGULAR ± 3 °																											
2005/10/27																											
2005/10/27																											
2005/10/28																											
2005/10/28																											
A4	REV			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																						

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru