

3M™ Metal-Out Static Shielding Bag 1500


This transparent metal-out static shielding bag is designed to provide a static safe environment for sensitive electronic devices. Bags are printed with an ESD warning symbol and a lot code for traceability. Open top and ZipTop styles are available. The bags are heat sealable.

3M Static Shielding Bags are manufactured from a top coat, metal, polyester, polyethylene laminate. The proprietary top coating is designed to protect the metal layer. Polyester dielectric, in concert with the metal layer, is intended to provide shielding of Electrostatic Discharge (ESD) and to help minimize the penetration of electric field.

These bags are tested to meet or exceed certain electrical and physical requirements of ANSI/ESD S541 and to be ANSI/ESD S20.20 program compliant. Bags are RoHS Compliant* and lead-free**.



3M™ Metal-Out Static Shielding Bag 1500

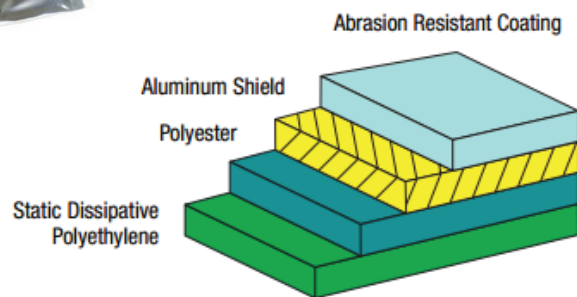

Physical	Typical Value	Testing Method
Tensile Strength	4900 PSI, 34 MPa	ASTM D882
Puncture Resistance	10 lbs, 44 N	MIL-STD-3010C Method 2065
Seal Strength	14 lbs, 62 N	ASTM D882
Thickness	3 mils, .0762 mm +/-15%	MIL-STD-3010C Method 1003
Marking Adhesion	Pass	IPC-TM-650 2.4.1
Transparency	40%	Tobias

Electrical	Typical Value	Testing Method
ESD Shielding	<10 nJ	ANSI/ESD STM11.31
Surface Resistance - Interior	<1x10 ¹¹ ohms	ANSI/ESD STM11.11
Surface Resistance - Exterior	<1x10 ⁶ ohms	ANSI/ESD STM11.11
Static Decay	< 2 seconds	ETS 406D
Charge Retention	<100 volts	CPM-3M TP.21XX

Cleanliness	Typical Value	Testing Method
Silicone	Not Detected	FTIR

Heat Sealing Conditions	Typical Value
Temperature	300°F – 375°F, 149°C – 190°C
Time	0.5 – 3.5 seconds
Pressure	30 – 70 PSI, 206 – 482 KPa

This product is intended for commercial use only. This product is not on the Qualified Product Listing under the Defense Standardization Program.

3M™ Metal-Out Static Shielding Bag 1500

3M Metal-Out Static Shielding Bags, Open Top 1500

Dimensions (W x L in.)	Part No.	Dimensions (W x L in.)	Part No.	Dimensions (W x L in.)	Part No.
3 x 5	15035	8 x 12	150812	12 x 18	1501218
4 x 6	15046	9 x 12	150912	14 x 18	1501418
5 x 8	15058	10 x 12	1501012	15 x 18	1501518
6 x 8	15068	10 x 14	1501014	16 x 24	1501624
6 x 10	150610	10 x 24	1501024	18 x 18	1501818
6 x 30	150630	11 x 15	1501115	18 x 24	1501824
7 x 15	150715	12 x 16	1501216		

Custom Sizes and Printing Available.

3M Metal-Out Static Shielding Bags, ZipTop 1500

Dimensions (W x L in.)	Part No.	Dimensions (W x L in.)	Part No.	Dimensions (W x L in.)	Part No.
3 x 5	150Z35	6 x 8	150Z68	10 x 12	150Z1012
4 x 4	150Z44	6 x 10	150Z610	12 x 18	150Z1218
4 x 6	150Z46	8 x 10	150Z810	12 x 18	1911218

Custom Sizes and Printing Available.

3M is a trademark of 3M Company. All other trademarks are owned by their respective companies.

*** RoHS 2011/65/EU Compliant** means that the product or part does not contain any of the substances in excess of the maximum concentration values ("MCVs") in EU RoHS Directive 2011/65/EU. The MCVs are by weight in homogeneous materials. This information represents 3M's knowledge and belief, which may be based in whole or in part on information provided by third party suppliers to 3M.

In the event any product is proven not to conform with 3M's Regulatory Information, then 3M's entire liability and Buyer's exclusive remedy will be in accordance with the Warranty section.


**Lead-free means that the product has less than 2 ppm of lead when tested by ICP-AES, with reference to EPA method 3051A/3052.



Electronic Solutions Division Static Control Products

926 JR Industrial Drive
Sanford, NC 27332
Toll-Free: 866-722-3736
International: 919-718-0000
Email: 3mstaticinfo@mmm.com
www.3Mstatic.com

Please recycle. Printed in USA.
© 3M 2014. All rights reserved.
98-0799-1154-5 JHA

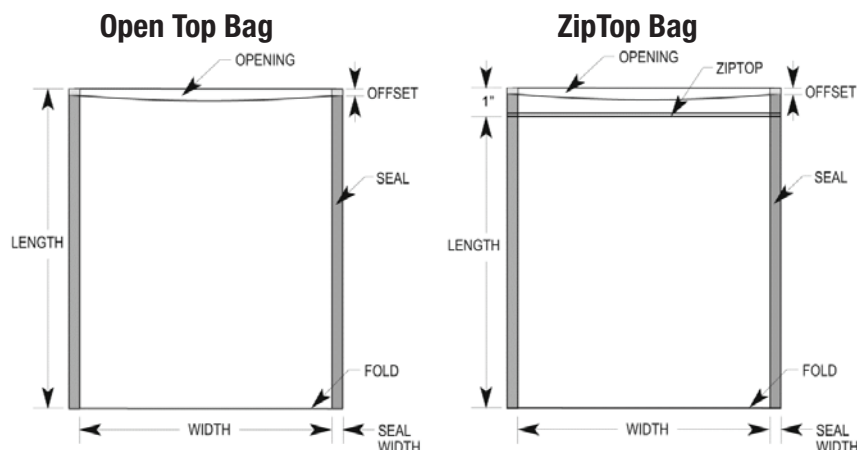

- Standard sizes stocked for prompt shipment (usually same day).
- Width is measured from inside seam to inside seam.
- Length is measured from the top edge to the bottom fold.
- Opening is in the "width" dimension.
- Custom bag sizes, custom printing, and custom hot stamping are available.
- Most sizes are packed 100 per case.
- Small sizes are packed 500 or 1,000 per case.

Tolerance (inches): Width -0, +0.250
Length +/- 0.125 Offset 0 to 0.250
Seal width +/- 0.125

Important Notice

All statements, technical information, and recommendations related to 3M's products are based on information believed to be reliable, but the accuracy or completeness is not guaranteed. Before using this product, you must evaluate it and determine if it is suitable for your intended application. You assume all risks and liability associated with such use. Any statements related to the product which are not contained in 3M's current publications, or any contrary statements contained on your purchase order shall have no force or effect unless expressly agreed upon, in writing, by an authorized officer of 3M.

Warranty; Limited Remedy; Limited Liability.

This product will be free from defects in material and manufacture for one year from the time of purchase. **3M MAKES NO OTHER WARRANTIES INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.** If this product is defective within the warranty period stated above, your exclusive remedy shall be, at 3M's option, to replace or repair the 3M product or refund the purchase price of the 3M product. Except where prohibited by law, 3M will not be liable for any indirect, special, incidental or consequential loss or damage arising from this 3M product, regardless of the legal theory asserted.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru