

Wind CUBEFuse™

For Wind Power Generation Applications



Catalog Symbol: WCF_RN

Description: Finger-safe, fast-acting CUBEFuse for wind power generation.

Electrical Characteristics: Maximum clearing time at 200% rated current:

- 4 Minutes for 1 to 30A fuses
- 6 Minutes for 35 to 60A fuses
- 8 Minutes for 70 to 100A fuses

Ratings:

- Volts — 690Vac
- Amps — 1-100A
- IR — 50kA AC (1-60A)
- IR — 30kA AC (70-100A)

Agency Information:

- UL Recognized Fuse: Guide JFHR, File E56412
- cURus component certified C22.2

Other Ratings/Specifications:

- Watts Loss at Rated Current:** WCF15RN: 3.48W
WCF30RN: 5.45W
WCF60RN: 7.27W
WCF100RN: 11.50W

Operating and Storage Temperature Range: -40 to 90°C

Material Specifications:

- Case: Glass filled PES (Polyethersulfone)
- Terminals: Copper alloy
- Terminal plating: Electroless tin

Installation:

Fits 690V WCF holders as listed in the table

Application:

- Wind Systems:
 - Transformer protection
 - Pitch and speed control
 - Turbine HVAC and lighting

Carton Quantity and Weight

| Amp Rating | Carton Qty. | Weight Per Carton | |
|------------|-------------|-------------------|------|
| | | lbs | kg |
| WCF1-30A | 12 | 1.39 | 0.63 |
| WCF35-60A | 12 | 1.42 | 0.65 |
| WCF70-100A | 6 | 1.74 | 0.79 |

Features and Product Benefits

- Maximize uptime and reliability using fuses designed and recognized to UL 248 for low voltage fuses
- Fast-acting protection specifically designed for low-fault current conditions that occur in wind power generation systems
- Minimize chances of equipment failure and personnel injury when using full range fuses having fast response time to low-magnitude faults
- Simplify compatibility with readily available industry standard Class CF holders while minimizing panel space by up to 80%
- Meets all UL specified overload opening requirements
- Minimizes incident energy and reduces arc flash hazards utilizing Class J electrical characteristics
- Finger-safe feature minimizes exposure to live parts, reducing hazard to personnel

Catalog Numbers (amp rating)

| Non-Indicating Wind CUBEFuse | | | | |
|------------------------------|---------|---------|---------|----------|
| WCF1RN | WCF15RN | WCF35RN | WCF60RN | WCF100RN |
| WCF3RN | WCF20RN | WCF40RN | WCF70RN | — |
| WCF6RN | WCF25RN | WCF45RN | WCF80RN | — |
| WCF10RN | WCF30RN | WCF50RN | WCF90RN | — |

Wind CUBEFuse Holders

| Catalog Numbers (amps) | Fits 690V Wind CUBEFuse Holder | | |
|------------------------|--------------------------------|----------|-----------|
| | TCFH30NW | TCFH60NW | TCFH100NW |
| WCF1RN | X | X | X |
| WCF3RN | X | X | X |
| WCF6RN | X | X | X |
| WCF10RN | X | X | X |
| WCF15RN | X | X | X |
| WCF20RN | X | X | X |
| WCF25RN | X | X | X |
| WCF30RN | X | X | X |
| WCF35RN | | X | X |
| WCF40RN | | X | X |
| WCF50RN | | X | X |
| WCF60RN | | X | X |
| WCF70RN | | | X |
| WCF80RN | | | X |
| WCF90RN | | | X |
| WCF100RN | | | X |

WCF_RN Dimensions – in (mm)




| Fuse Amps | Dimensions - in (mm) | | | | | | |
|-----------|----------------------|-----------------|-----------------|-----------------|----------------|-----------------|----------------|
| | A | B | C | D | E | F | G |
| 1-15 | 1.88 (47.75) | 0.75 (19.05) | 1.00 (25.40) | 0.23 (5.84) | 0.04 (1.02) | 0.63 (15.93) | 0.28 (7.11) |
| 20 | 1.88 (47.75) | 0.75 (19.05) | 1.00 (25.40) | 0.31 (7.87) | 0.04 (1.02) | 0.63 (15.93) | 0.28 (7.11) |
| 25-30 | 1.88 (47.75) | 0.75 (19.05) | 1.00 (25.40) | 0.31 (7.87) | 0.04 (1.02) | 0.63 (15.93) | 0.28 (7.11) |
| 35-40 | 2.13 (54.10) | 1.00 (25.40) | 1.13 (28.58) | 0.36 (9.10) | 0.04 (1.02) | 0.63 (15.93) | 0.38 (9.65) |
| 45-50 | 2.13 (54.10) | 1.00 (25.40) | 1.13 (28.58) | 0.44 (11.13) | 0.04 (1.02) | 0.63 (15.93) | 0.38 (9.65) |
| 60 | 2.13 (54.10) | 1.00 (25.40) | 1.13 (28.58) | 0.44 (11.13) | 0.04 (1.02) | 0.63 (15.93) | 0.38 (9.65) |
| 70 | 3.01 (76.45) | 1.00 (25.40) | 1.26 (32.00) | 0.49 (12.45) | 0.06 (1.60) | 0.58 (14.78) | 0.38 (9.65) |
| 80-90 | 3.01 (76.45) | 1.00 (25.40) | 1.26 (32.00) | 0.49 (12.45) | 0.06 (1.60) | 0.58 (14.78) | 0.38 (9.65) |
| 100 | 3.01 (76.45) | 1.00 (25.40) | 1.26 (32.00) | 0.57 (14.48) | 0.06 (1.60) | 0.58 (14.78) | 0.38 (9.65) |

Time-Current Characteristic Curves—Average Melt



Current Limitation Curves

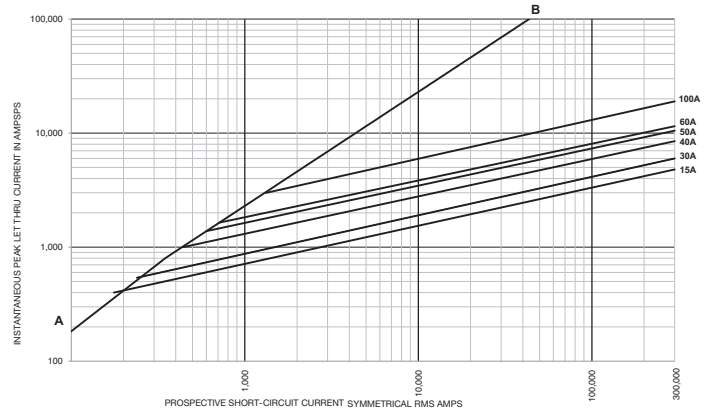

Wind CUBEFuse Holders



All 690V 100, 60 and 30A Wind CUBEFuse holders can be dovetailed together for the required number of poles.

690V Fuse Holder Catalog Numbers

| Catalog Numbers | Amp Range |
|-----------------|-----------|
| TCFH30NW | 1-30 |
| TCFH60NW | 1-60 |
| TCFH100NW | 1-100 |

The only controlled copy of this Data Sheet is the electronic read-only version located on the Cooper Bussmann Network Drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Cooper Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Cooper Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru