



# MAC4DSM, MAC4DSN




## Description

Designed for high volume, low cost, industrial and consumer applications such as motor control; process control; temperature, light and speed control.


## Features

- Small Size Surface Mount DPAK Package
- Passivated Die for Reliability and Uniformity
- Blocking Voltage to 800 V
- On-State Current Rating of 4.0 A RMS at 108°C
- Low IGT – 10 mA Maximum in 3 Quadrants
- High Immunity to dv/dt – 50 V/μs at 125°C
- Epoxy Meets UL 94 V-0 @ 0.125 in
- ESD Ratings: Human Body Model, 3B > 8000 V  
Machine Model, C > 400 V
- Pb-Free Packages are Available

## Pin Out

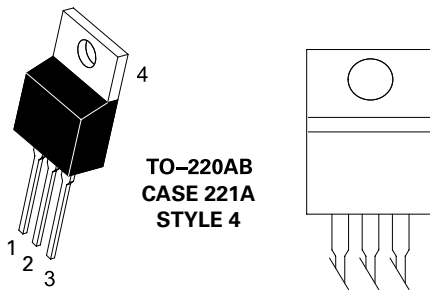

## Functional Diagram



## Additional Information



Datasheet



Resources



Samples

### Maximum Ratings ( $T_J = 25^\circ\text{C}$ unless otherwise noted)

| Rating  | Symbol                   | Value       | Unit               |
|---|--------------------------|-------------|--------------------|
| Peak Repetitive Off-State Voltage (Note 1)<br>(Gate Open, Sine Wave 50 to 60 Hz, $T_J = -40^\circ$ to $110^\circ\text{C}$ ) | $V_{DRM}^*$<br>$V_{RRM}$ | 600<br>800  | V                  |
| On-State RMS Current (Full Cycle Sine Wave, 60 Hz, $T_C = 108^\circ\text{C}$ )  | $I_T$ (RMS)              | 4.0         | A                  |
| Peak Non-Repetitive Surge Current<br>(One Full Cycle Sine Wave, 60 Hz, $T_C = 108^\circ\text{C}$ )                          | $I_{TSM}$                | 40          | A                  |
| Circuit Fusing Consideration ( $t = 8.3$ msec)  | $I^2t$                   | 6.6         | A <sup>2</sup> sec |
| Peak Gate Current (Pulse Width $\leq 20$ $\mu\text{sec}$ , $T_C = 108^\circ\text{C}$ )                                      | $I_{GM}$                 | 4.0         | A                  |
| Peak Gate Power (Pulse Width $\leq 10$ $\mu\text{sec}$ , $T_C = 108^\circ\text{C}$ )  | $P_{GM}$                 | 2.0         | W                  |
| Peak Gate Voltage (Pulse Width $\leq 20$ $\mu\text{sec}$ , $T_C = 108^\circ\text{C}$ )                                      | $V_{GM}$                 | 5.0         | V                  |
| Average Gate Power ( $t = 8.3$ msec, $T_C = 108^\circ\text{C}$ )  | $P_{G(AV)}$              | 1.0         | W                  |
| Operating Junction Temperature Range  | $T_J$                    | -40 to +125 | $^\circ\text{C}$   |
| Storage Temperature Range   | $T_{stg}$                | -40 to +150 | $^\circ\text{C}$   |

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

- $V_{DRM}$  and  $V_{RRM}$  for all types can be applied on a continuous basis. Ratings apply for zero or negative gate voltage; however, positive gate voltage shall not be applied concurrent with negative potential on the anode. Blocking voltages shall not be tested with a constant current source such that the voltage ratings of the devices are exceeded.

### Thermal Characteristics

| Rating   | Symbol  | Value           | Unit                      |
|--|---|-----------------|---------------------------|
| Thermal Resistance<br>Junction-to-Case (AC)<br>Junction-to-Ambient<br>Junction-to-Ambient (Note 2) | $R_{\theta JC}$<br>$R_{\theta JA}$<br>$R_{\theta JA}$ | 3.5<br>88<br>80 | $^\circ\text{C}/\text{W}$ |
| Maximum Lead Temperature for Soldering Purposes, 1/8" from case for 10 seconds (Note 3)            | $T_L$   | 260             | $^\circ\text{C}$          |

- These ratings are applicable when surface mounted on the minimum pad sizes recommended.
- 1/8" from case for 10 seconds.

### Electrical Characteristics - OFF ( $T_J = 25^\circ\text{C}$ unless otherwise noted ; Electricals apply in both directions)

| Characteristic   | Symbol                   | Min | Typ | Max         | Unit |
|--|--------------------------|-----|-----|-------------|------|
| Peak Repetitive Blocking Current<br>( $V_D = V_{DRM} = V_{RRM}$ ; Gate Open) | $I_{DRM}^*$<br>$I_{RRM}$ | -   | -   | 0.01<br>2.0 | mA   |

### Electrical Characteristics - ON ( $T_J = 25^\circ\text{C}$ unless otherwise noted; Electricals apply in both directions)

| Characteristic  | Symbol       | Min | Typ  | Max | Unit |
|---|--------------|-----|------|-----|------|
| Peak On-State Voltage (Note 4) ( $I_{TM} = \pm 6.0$ A)  | $V_{TM}$     | -   | 1.3  | 1.6 | V    |
| Gate Trigger Current<br>(Continuous dc)<br>( $V_D = 12$ V, $R_L = 100$ $\Omega$ )                   | MT2(+), G(+) | 2.9 | 4.0  | 10  | mA   |
|   | MT2(+), G(-) | 2.9 | 5.0  | 10  |      |
|   | MT2(-), G(-) | 2.9 | 7.0  | 10  |      |
| Holding Current ( $V_D = 12$ V, Gate Open, Initiating Current = $\pm 200$ mA)                       | $I_H$        | 2.0 | 5.5  | 1.5 | mA   |
| Latching Current  | MT2(+), G(+) | -   | 6.0  | 30  | mA   |
|   | MT2(+), G(-) | -   | 10   | 30  |      |
|   | MT2(-), G(-) | -   | 6.0  | 30  |      |
| Gate Trigger Voltage<br>(Continuous dc)<br>( $V_D = 12$ V, $R_L = 100$ $\Omega$ )                   | MT2(+), G(+) | 0.5 | 0.7  | 1.3 | V    |
|   | MT2(+), G(-) | 0.5 | 0.65 | 1.3 |      |
|   | MT2(-), G(-) | 0.5 | 0.7  | 1.3 |      |
| Gate Non-Trigger Voltage<br>( $T_J = 125^\circ\text{C}$ )<br>( $V_D = 12$ V, $R_L = 100$ $\Omega$ ) | MT2(+), G(+) | 0.2 | 0.4  | -   | V    |
|   | MT2(+), G(-) | 0.2 | 0.4  | -   |      |
|   | MT2(-), G(-) | 0.2 | 0.4  | -   |      |


- Indicates Pulse Test: Pulse Width  $\leq 2.0$  ms, Duty Cycle  $\leq 2\%$ .

**Dynamic Characteristics**


| Characteristic   | Symbol                   | Min | Typ | Max | Unit             |
|--|--------------------------|-----|-----|-----|------------------|
| Rate of Change of Commutating Current<br>( $V_D = 400\text{ V}$ , $I_{TM} = 3.5\text{ A}$ , Commutating $dv/dt = 10\text{ V}/\mu\text{sec}$ , Gate Open, $T_J = 125^\circ\text{C}$ , $f = 500\text{ Hz}$ , $CL = 5.0\ \mu\text{F}$ , $LL = 20\text{ mH}$ , No Snubber) See Figure 16 | ( $di/dt$ ) <sub>c</sub> | 3.0 | 4.0 | -   | A/ms             |
| Critical Rate of Rise of Off-State Voltage<br>( $V_D = 0.67 \times V_{DRM}$ , Exponential Waveform, Gate Open, $T_J = 125^\circ\text{C}$ )   | $dV/dt$                  | 50  | 175 | -   | V/ $\mu\text{s}$ |

**Voltage Current Characteristic of SCR**

| Symbol    | Parameter                                 |
|-----------|---|
| $V_{DRM}$ | Peak Repetitive Forward Off State Voltage |
| $I_{DRM}$ | Peak Forward Blocking Current             |
| $V_{RRM}$ | Peak Repetitive Reverse Off State Voltage |
| $I_{RRM}$ | Peak Reverse Blocking Current             |
| $V_{TM}$  | Maximum On State Voltage                  |
| $I_H$     | Holding Current                           |

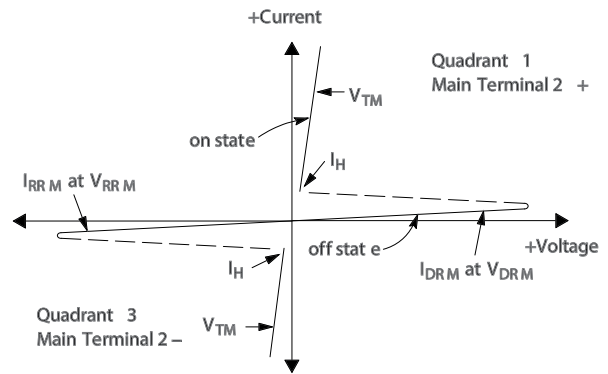


**Quadrant Definitions for a Triac**

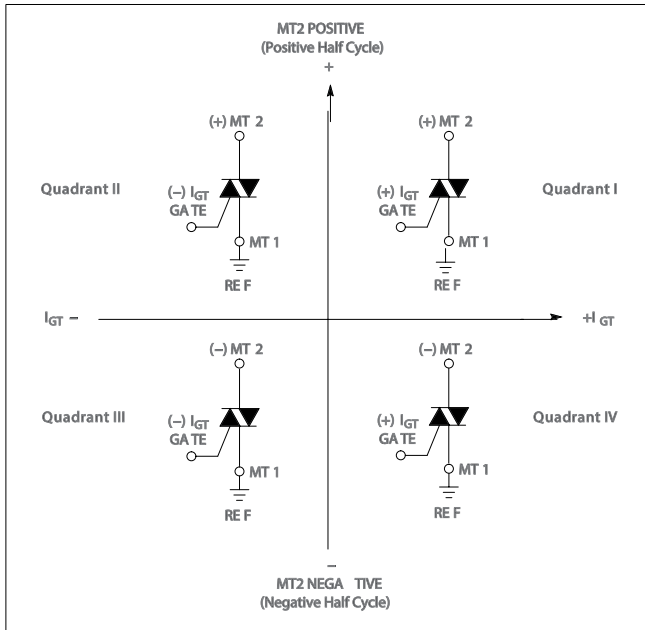


All polarities are referenced to MT1.  
With in-phase signals (using standard AC lines) quadrants I and III are used


**Figure 1. Typical RMS Current Derating**

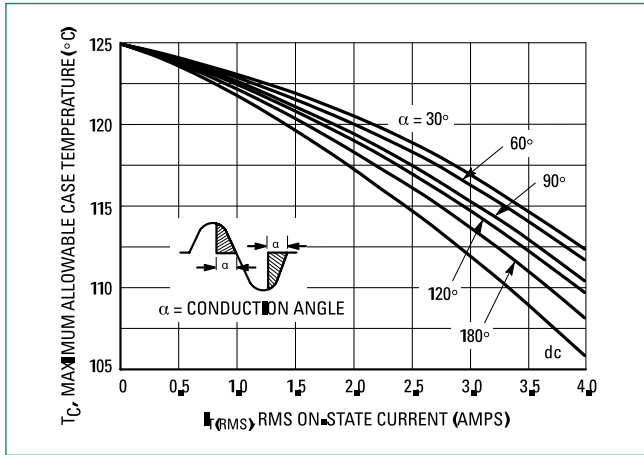


**Figure 2. On-State Power Dissipation**

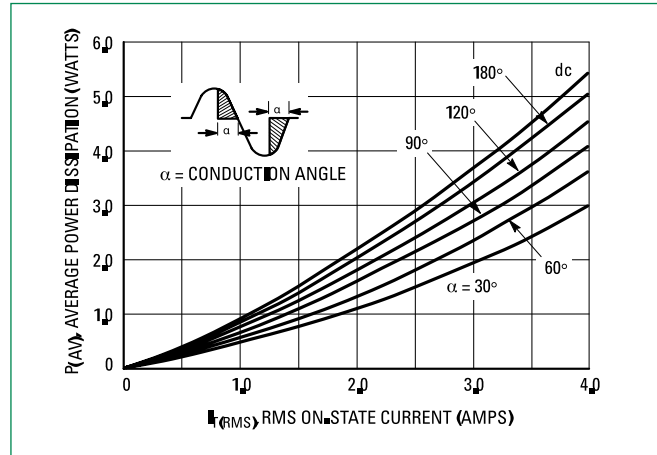


**Figure 3. On-State Characteristics**

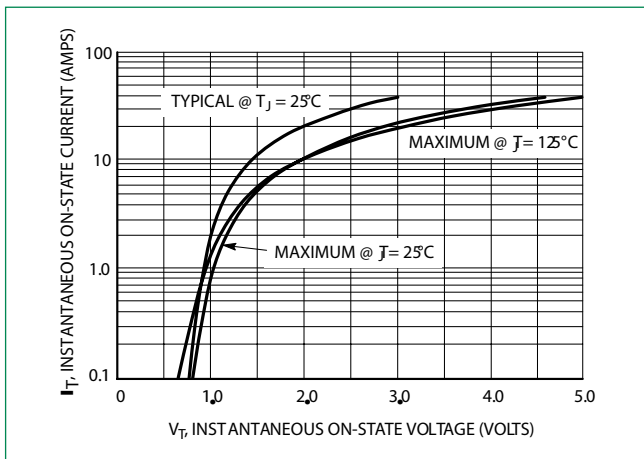


**Figure 4. Transient Thermal Response**

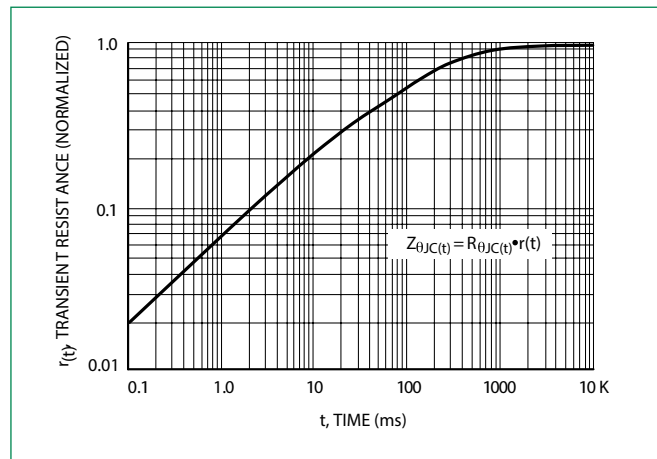


**Figure 5. Typical Gate Trigger Current vs. Junction Temperature**

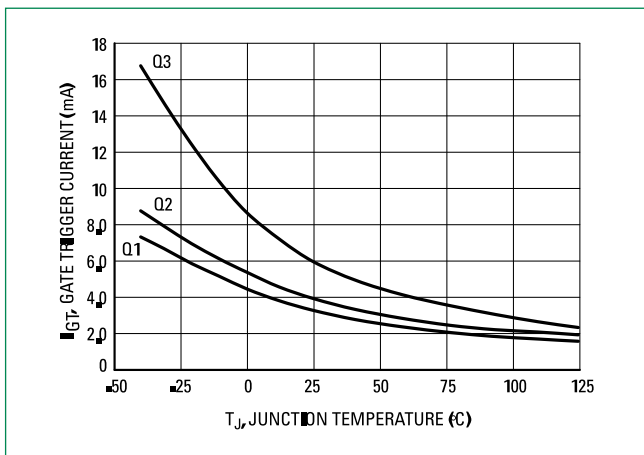


**Figure 6. Typical Gate Trigger Voltage vs. Junction Temperature**

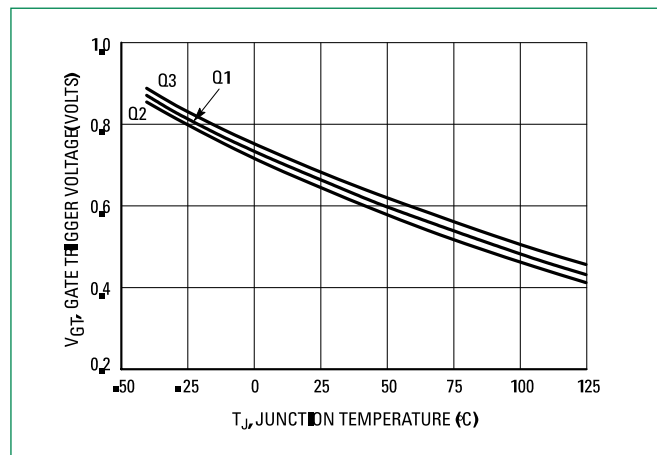


**Figure 7. Typical Holding Current vs. Junction Temperature**

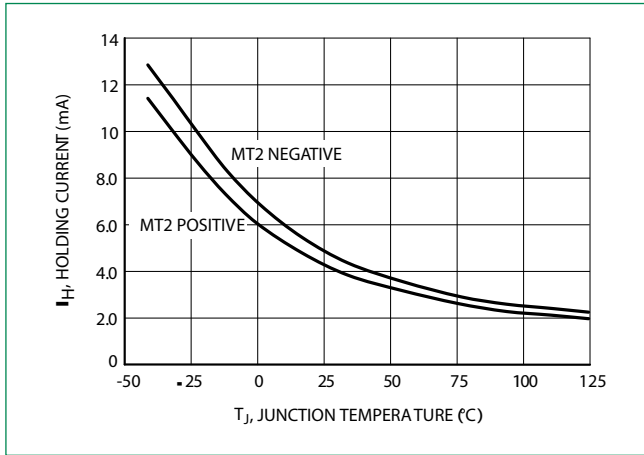


**Figure 8. Typical Latching Current vs. Junction Temperature**

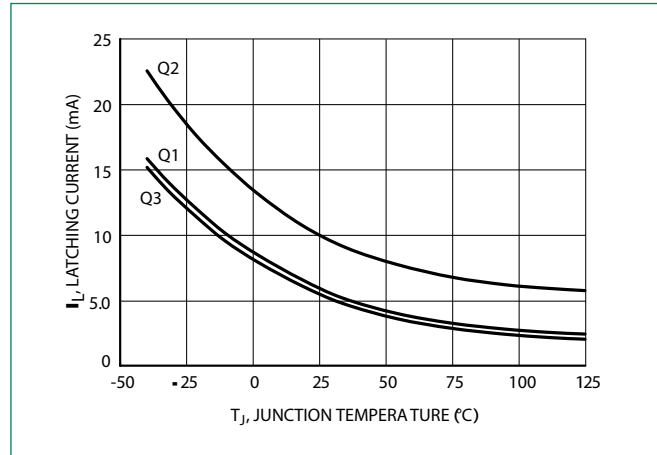


**Figure 9. Exponential Static dv/dt vs. Gate-MT1 Resistance, MT2(+)**

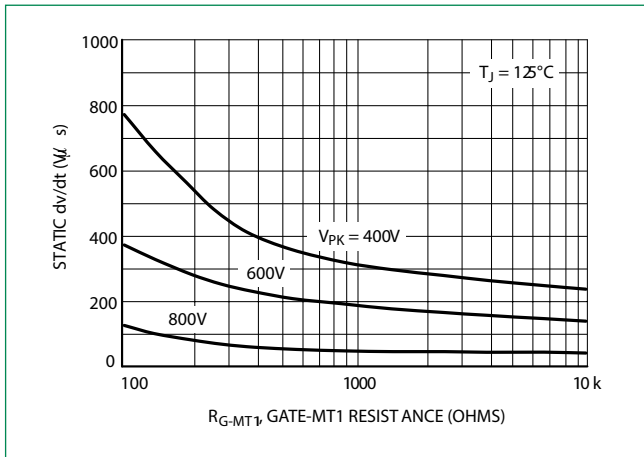


**Figure 10. Exponential Static dv/dt vs. Gate-MT1 Resistance, MT2(-)**

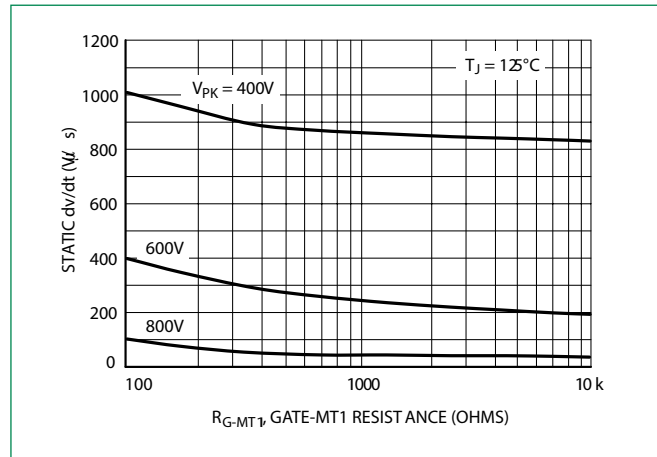


**Figure 9. Exponential Static dv/dt vs. Gate-MT1 Resistance, MT2(+)**

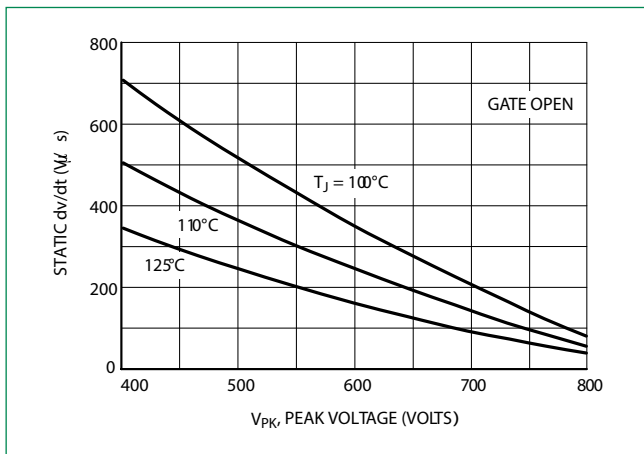


**Figure 10. Exponential Static dv/dt vs. Gate-MT1 Resistance, MT2(-)**

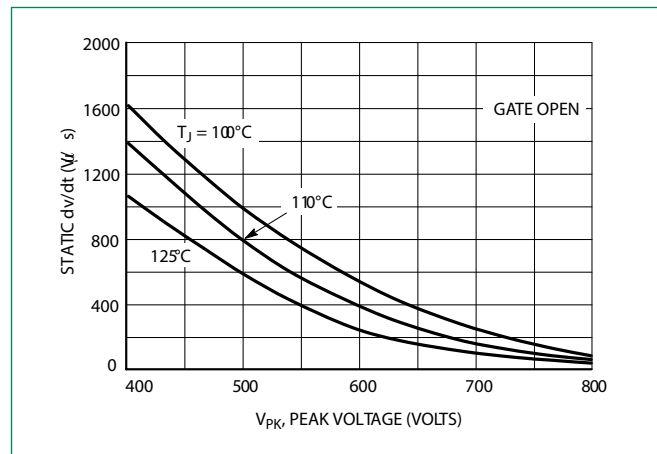


**Figure 13. Typical Holding Current vs. Junction Temperature**

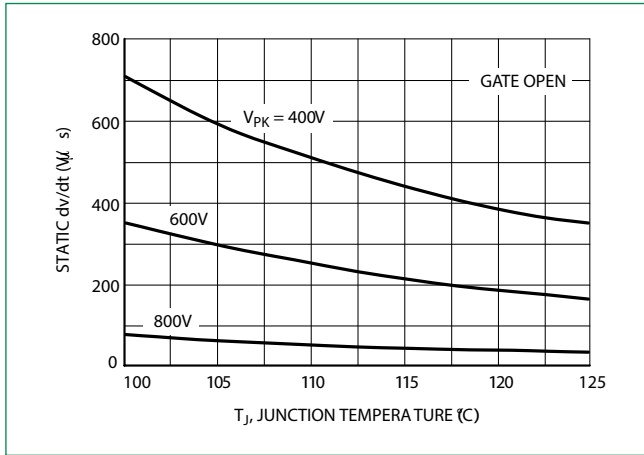


**Figure 14. Typical Latching Current vs. Junction Temperature**

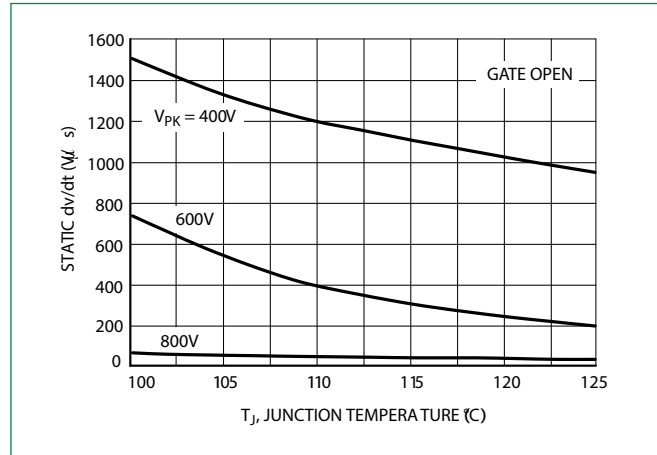


**Figure 15. Typical Holding Current vs. Junction Temperature**

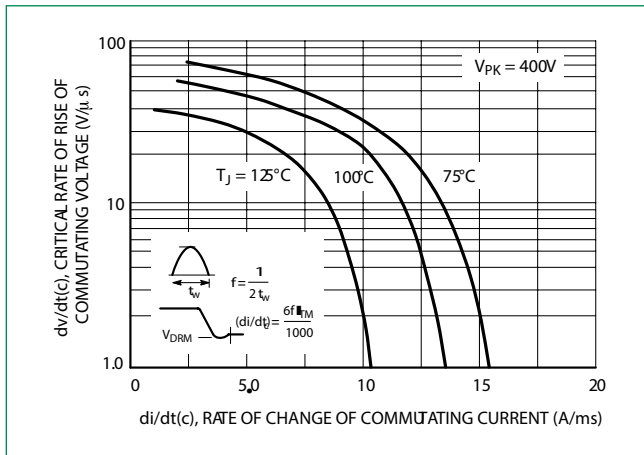


**Figure 16. Simplified Test Circuit to Measure the Critical Rate of Rise of Commutating Current (di/dt)**

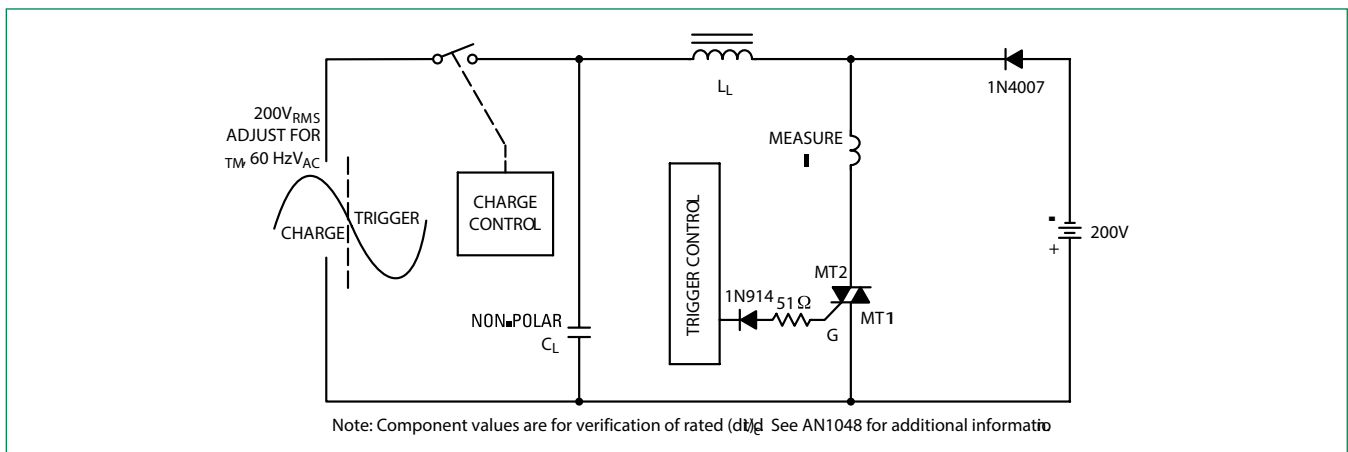

**Dimensions**

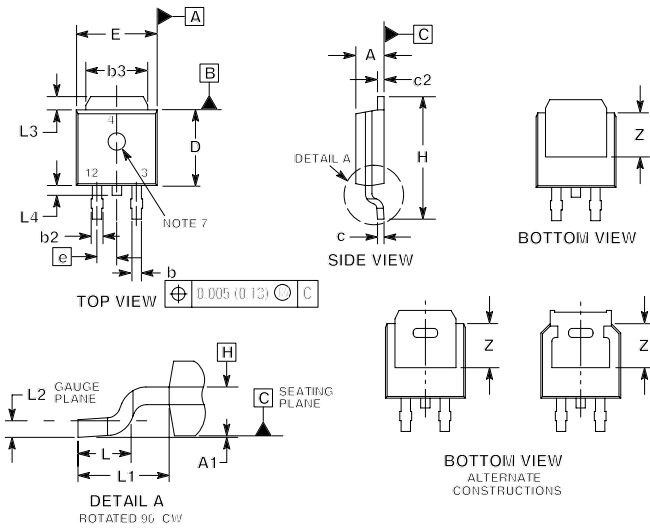

**Soldering Footprint**

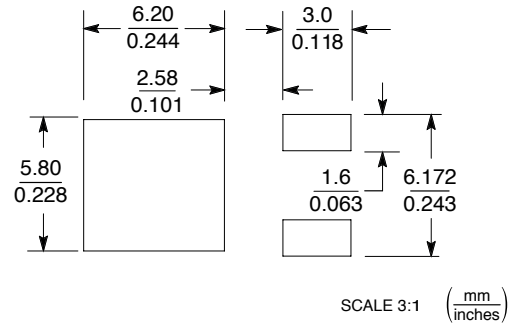


| Dim | Inches |       | Millimeters |       |
|-----|--------|-------|-------------|-------|
|     | Min    | Max   | Min         | Max   |
| A   | 0.087  | 0.094 | 2.20        | 2.40  |
| A1  | 0.000  | 0.005 | 0.00        | 0.12  |
| b   | 0.022  | 0.030 | 0.55        | 0.75  |
| b2  | 0.026  | 0.033 | 0.65        | 0.85  |
| b3  | 0.209  | 0.217 | 5.30        | 5.50  |
| c   | 0.019  | 0.023 | 0.49        | 0.59  |
| c2  | 0.019  | 0.023 | 0.49        | 0.59  |
| D   | 0.213  | 0.224 | 5.40        | 5.70  |
| E   | 0.252  | 0.260 | 6.40        | 6.60  |
| e   | 0.091  |       | 2.30        |       |
| H   | 0.374  | 0.406 | 9.50        | 10.30 |
| L   | 0.058  | 0.070 | 1.47        | 1.78  |
| L1  | 0.114  |       | 2.90        |       |
| L2  | 0.019  | 0.023 | 0.49        | 0.59  |
| L3  | 0.053  | 0.065 | 1.35        | 1.65  |
| L4  | 0.028  | 0.039 | 0.70        | 1.00  |
| Z   | 0.154  | -     | 3.90        | -     |

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.

STYLE 6:  
PIN 1. MT1  
2. MT2  
3. GATE  
4. MT2

### Dimensions

**DPAK-3**  
CASE 369D-01  
ISSUE B

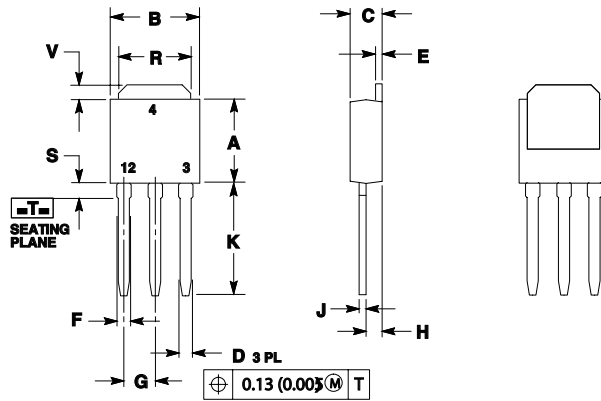


| Dim | Inches |       | Millimeters |      |
|-----|--------|-------|-------------|------|
|     | Min    | Max   | Min         | Max  |
| A   | 0.213  | 0.224 | 5.40        | 5.70 |
| B   | 0.252  | 0.260 | 6.40        | 6.60 |
| C   | 0.087  | 0.094 | 2.20        | 2.40 |
| D   | 0.024  | 0.030 | 0.60        | 0.75 |
| E   | 0.022  | 0.026 | 0.55        | 0.65 |
| F   | 0.031  | 0.039 | 0.78        | 0.98 |
| G   | 0.091  |       | 2.30        |      |
| H   | 0.046  | 0.050 | 1.18        | 1.28 |
| J   | 0.019  | 0.023 | 0.49        | 0.59 |
| K   | 0.291  | 0.315 | 7.40        | 8.00 |
| R   | 0.209  | 0.217 | 5.30        | 5.50 |
| S   | 0.063  |       | 1.60        |      |
| V   | 0.053  | 0.065 | 1.35        | 1.65 |
| Z   | 0.150  |       | 3.80        |      |

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.



2. CONTROLLING DIMENSION: INCH.

STYLE 6:  
PIN 1. MT1  
2. MT2  
3. GATE  
4. MT2


### Part Marking System



**DPAK**  
CASE 369C  
STYLE 6



**DPAK-3**  
CASE 369D  
STYLE 6



AC4DCx =Device Code  
x =M or N  
Y =Year  
M =Month  
A =Assembly Site  
XX =Lot Serial Code  
G =Pb-Free Package

| Pin Assignment |                 |
|----------------|-----------------|
| 1              | Main Terminal 1 |
| 2              | Main Terminal 2 |
| 3              | Gate            |
| 4              | Main Terminal 2 |

### Ordering Information

| Device       | Package Type     | Package | Shipping           |
|--------------|------------------|---------|--------------------|
| MAC4DSM-001  | DPAK-3           | 369D    | 4000 Unit/Box      |
| MAC4DSM-001G | DPAK-3 (Pb-Free) | 369D    | 4000 Unit/Box      |
| MAC4DSMT4    | DPAK-3           | 369C    | 2500 / Tape & Reel |
| MAC4DSMT4G   | DPAK-3 (Pb-Free) | 369C    | 2500 / Tape & Reel |
| MAC4DSN-001  | DPAK-3           | 369D    | 4000 Unit/Box      |
| MAC4DSN-001G | DPAK-3 (Pb-Free) | 369D    | 4000 Unit/Box      |
| MAC4DSNT4    | DPAK-3           | 369C    | 2500 / Tape & Reel |

**Disclaimer Notice** - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at: [www.littelfuse.com/disclaimer-electronics](http://www.littelfuse.com/disclaimer-electronics)



Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)