Amphenol SOCAPEX

USB3F TV - Reduced Flange

Smaller and Lighter

Dataspeed
10 x higher than USB2.0

Description

Derived from standard USB3F TV, Reduced Flange USB3F TV is ideal for applications where small dimensions and lower weight are critical.
With USB field, you can insert a standard USB 3.0 cordset into a metallic plug which will protect it from shocks, dust and fluids. No hazardous on-field cabling and grounding!

Main Features

- Smaller: **40% footprint surface reduction**
- Lighter: **15% lighter than standard USB3F TV receptacles**
- MIL-DTL-38999 coupling mechanism
- Mates with standard USB3F TV plugs & caps
- 3 platings: Olive Drab Cadmium, Nickel, Black Zn Ni
- USB3.0
- Reduced Flange Deviation (to be added at the end of your part number):
  - **F312** for standard versions (**F311** with safety castle nut*)
  - **F059** for Stand Off versions (**F058** with safety castle nut*)

standard castle nut

** safety castle nut*

Main characteristics
Sealed against fluids and dust (IP68)
Shock, vibration and traction resistant
No cabling operation in field and no tools required
Improved EMI protection
Tri start thread coupling mechanism (MIl-DTL-38999 series III type) with anti-decoupling device - shell size 15
2 mechanical coding / polarization possibilities (receptacle insert rotation)
Mating cycles: 500 minimum

Environmental protection
Sealing: IP68 when mated with cap or potted version without cap
Salt spray: > 48h with aluminium shell - Nickel ✓ > 500h with aluminium shell - Olive drab cadmium plating > 500 h with aluminium shell - Black zinc nickel ✓
Fire retardant / low smoke: UL94 V0 and EN45545
Vibrations: 10 – 500 Hz, 10 g, 3 axes: no discontinuity > 1micro s
Shocks: IK06: weight of 250 g drop from 40 cm [15.75 in] onto connectors (mated pair)
Temperature range: - 40°C / +85°C

Data transmission

USB specification 3.0
Data rate: up to 5Gb/s for high speed USB
Power supply: up to 4.5 W

Markets & Applications

C4ISR, Battlefield, Ground vehicles

Navy

Railway

Applications :

- Embedded computers, data acquisition and transmission in harsh environment, battlefied communication

USB3F TV - Reduced Flange

Smaller Dimensions and 15% lighter

Product	Length (mm)		Footprint (mm)	Panel dimension
Standard USB3F TV	Standard USB3F TV	Standard stand off USBF TV	Standard USB3F TV	Standard USB3F TV
				
Reduced Flange USB3F TV	Reduced Flange USB3F TV **(F312)**	Stand off Reduced Flange USB3F TV **(F059)**	Reduced Flange USB3F TV	Reduced Flange USB3F TV
				
	Increase of internal length by 1,37 mm	Reduction of internal length by 4mm and increase of external length by 4mm	40% footprint surface reduction	

Footprint Saving

40% footprint surface reduction:

Shell Size	USB3F TV standard diameter ØA max (mm)	USB3F TV Reduced Flange diameter ØK max (mm)	Footprint surface reduction Reduced Flange vs standard
15	41,6	32,1	40%

Panel Dimension

	USB3F TV Standard		USB3F TV Reduced Flange	
Size	B $^{0}_{-0,25}$ (mm)	ØC $^{+0,25}_{0}$ (mm)	ØG $^{+0,1}_{0}$ (mm)	H $^{+0,1}_{0}$ (mm)
15	27,56	28,83	27	25,5

Tools

Need of a specific tool for castle nut:

Size	Tool Part Number
15	809684

Max torque value: 8.5 N.m

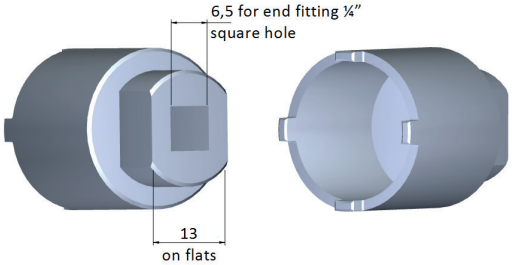

USB3F TV - Reduced Flange

Receptacle

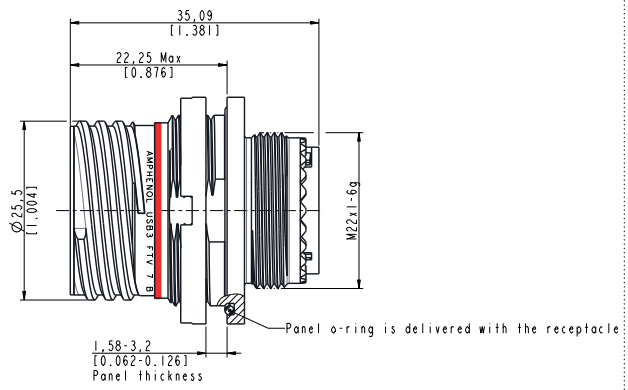

USB3F TV 7 X X F312



Panel Drilling

Stand off receptacle

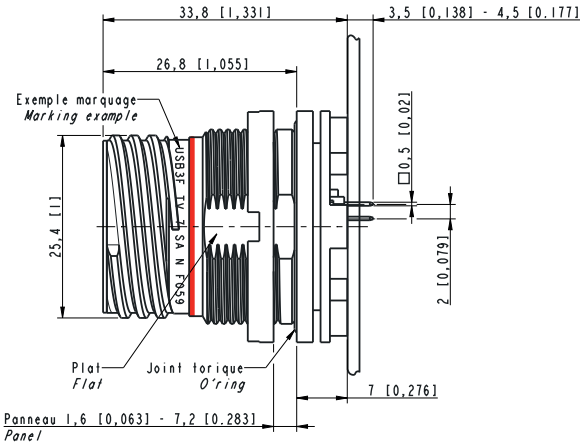

USB3F TV 7S X X F059



Panel Drilling

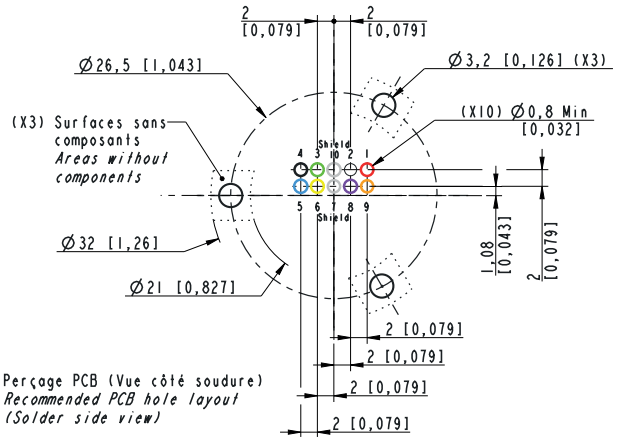

PCB Layout

Due to technical modifications, all information provided is subject to change without prior notice
Designed by Amphenol Socapex

Amphenol SOCAPEX

USB3F TV - Reduced Flange

Coding

To be specified in the part number: A or B.

Coding A:



Coding B:

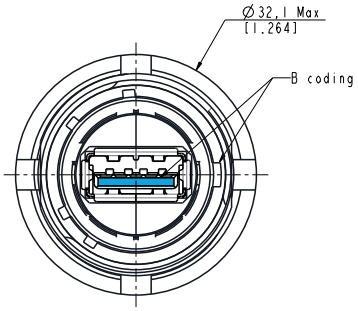

How to order

Series	USB3F TV	7	A	ZN	F312

Shell type
7: Jam nut receptacle
7S: Transversally sealed jam nut receptacle for F059 or F058 only

Coding
A or **B**

Shells material & Finish (inserts are metallized)
N: Aluminium shell - nickel plating ✓
G: Aluminium shell - olive drab cadmium plating
ZN: Aluminium shell - black zinc nickel plating ✓

Deviation
F312: Reduced Flange
F059: Stand off Reduced Flange (only in transversally sealed version)
F311: Reduced Flange with safety castle nut
F058: Stand off Reduced Flange with safety castle nut (only in transversally sealed version)

Examples: USB3FTV7AZNF312 ; USB3FTV7SBGF059
✓: RoHS compliant

Watch our video

Rugged USB Plug Assembly

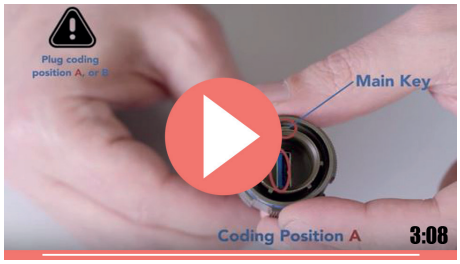

http://opn.to/a/Azd09

Scan
& discover !

Amphenol Socapex
948, promenade de l'Arve BP29
74311 Thyez Cedex - France
Phone: +33 (0)4 50 89 28 00
contact@amphenol-socapex.fr

Amphenol PCD (Contact in North America)
72 Cherry Hill Drive
Beverly, MA 01915
978-624-34000
www.amphenol-pcd.com

We reserve the right to modify our products in any way we deem necessary.
Any duplication is prohibited, unless approved in writing.

www.amphenol-socapex.com
Follow Amphenol Socapex on social media :

Designed by Amphenol Socapex
DOC-001012-ANG - February 2018

Amphenol SOCAPEX

LifeElectronics
Живое партнерство

ООО «ЛайфЭлектроникс» **“LifeElectronics” LLC**

ИНН 7805602321 КПП 780501001 Р/С 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 30101810900000000703 БИК 044030703

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- *Конкурентоспособные цены и скидки постоянным клиентам.*
- *Специальные условия для постоянных клиентов.*
- *Подбор аналогов.*
- *Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.*

- *Приемлемые сроки поставки, возможна ускоренная поставка.*
- *Доставку товара в любую точку России и стран СНГ.*
- *Комплексную поставку.*
- *Работу по проектам и поставку образцов.*
- *Формирование склада под заказчика.*

- *Сертификаты соответствия на поставляемую продукцию (по желанию клиента).*
- *Тестирование поставляемой продукции.*
- *Поставку компонентов, требующих военную и космическую приемку.*
- *Входной контроль качества.*
- *Наличие сертификата ISO.*

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- *Регистрацию проекта у производителя компонентов.*
- *Техническую поддержку проекта.*
- *Защиту от снятия компонента с производства.*
- *Оценку стоимости проекта по компонентам.*
- *Изготовление тестовой платы монтаж и пусконаладочные работы.*

Тел: +7 (812) 336 43 04 (многоканальный)
Email: org@lifeelectronics.ru

www.lifeelectronics.ru