

# Model TS318-1B0814 Thermopile Sensor



**Thermopile IR-Sensor**  
**For Contactless Temperature Measurement**  
**Single Element**  
**Small Package for Ear Thermometer**  
**High Signal**  
**Flat Filter**  
**Accurate Reference Sensor**

## DESCRIPTION

Thermopiles are mainly used for contactless temperature measurement in many applications. Their function is to transfer the heat radiation emitted from the objects into a voltage output.

## FEATURES

- High Signal
- Ni-RTD Reference Sensor
- Small TO-18 Package
- 8-14 $\mu$ m Band Pass Filter for measurement distances >0.5m

## APPLICATIONS

- Pyrometers (general)
- Industrial Pyrometers

## ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Min	Typical	Max	Unit	Description
Storage Temperature	T <sub>s</sub>	-20	+20	+85	°C	permanent
Storage Temperature	T <sub>s</sub>	-20	+20	+100	°C	non permanent

# Model TS318-1B0814 Thermopile Sensor

## PERFORMANCE SPECS

Parameter	Symbol	Value	Unit	Condition
Operating Ambient Temperature	$T_{Amb}$	-20 to +85	°C	permanent
Operating Ambient Temperature	$T_{Amb}$	-20 to +100	°C	non permanent
Package		TO-18		
Absorber Area	A	$0.8 \times 0.8$	mm <sup>2</sup>	
Thermopile Resistance	$R_{TP}$	$70 \pm 30$	k $\Omega$	$T_{Amb} = +25\text{ }^{\circ}\text{C}$
Temperature Coefficient of Thermopile Resistance	$TCR_{TP}$	$-0.06 \pm 0.04$	%/K	$T_{Amb} = +25\text{ }^{\circ}\text{C}$ to $+75\text{ }^{\circ}\text{C}$
Voltage Response	$V_{TP}$	$5.0 \pm 1.3$	mV	$T_{Amb} = +25\text{ }^{\circ}\text{C}$ , $T_{Obj} = +100\text{ }^{\circ}\text{C}$ , DC, totally filled field of view
Temperature Coefficient of Voltage Response	$TCV_{TP}$	$-0.45 \pm 0.08$	%/K	$T_{Amb} = +25\text{ }^{\circ}\text{C}$ to $+75\text{ }^{\circ}\text{C}$
Noise Equivalent Voltage	NEV	34	nV/Hz <sup>1/2</sup>	$T_{Amb} = +25\text{ }^{\circ}\text{C}$
Rise Time	$\tau_{63}$	$12 \pm 5$	ms	
Ambient Temperature Sensor		Ni-RTD		
Ambient Temperature Sensor Resistance	$R_{Ni-RTD}$	$1000 \pm 4$	$\Omega$	$T_{Amb} = 0\text{ }^{\circ}\text{C}$
Temperature Coefficient of Ni-RTD	$TC_{Ni-RTD}$	$6178 \pm 150$	ppm/K	$T_{Amb} = 0\text{ }^{\circ}\text{C}$ to $+100\text{ }^{\circ}\text{C}$

## TYPICAL PERFORMANCE CURVES

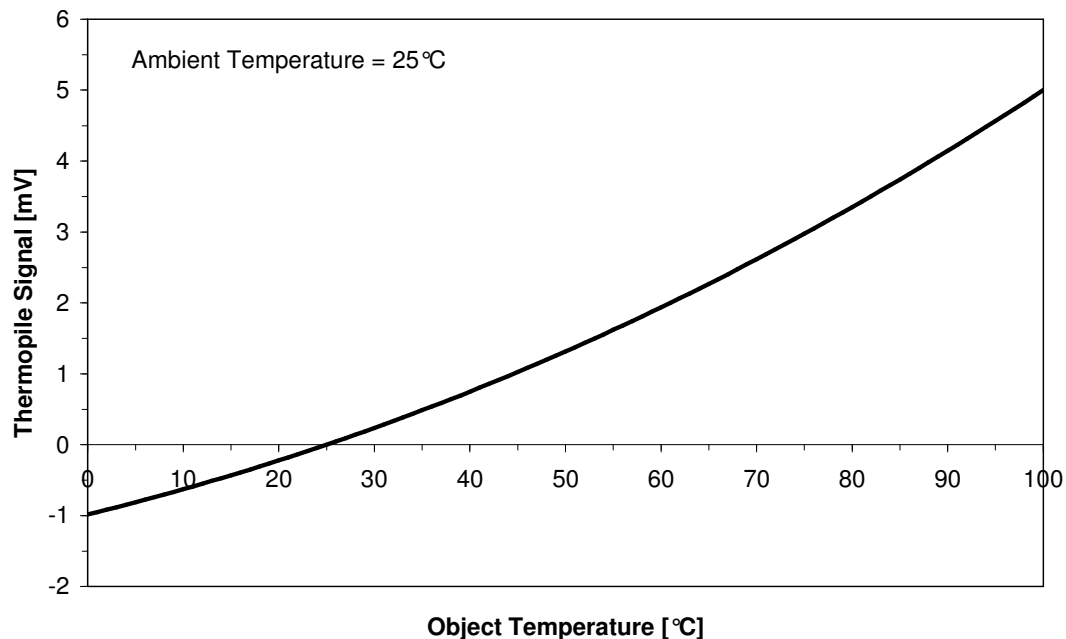


Figure 1: Thermopile signal versus object temperature at 25°C ambient temperature

# Model TS318-1B0814 Thermopile Sensor

## OPTICAL CHARACTERISTICS

Parameter	Symbol	Value	Unit	Description
Field of View	FOV	110	deg	at 50% of maximum signal

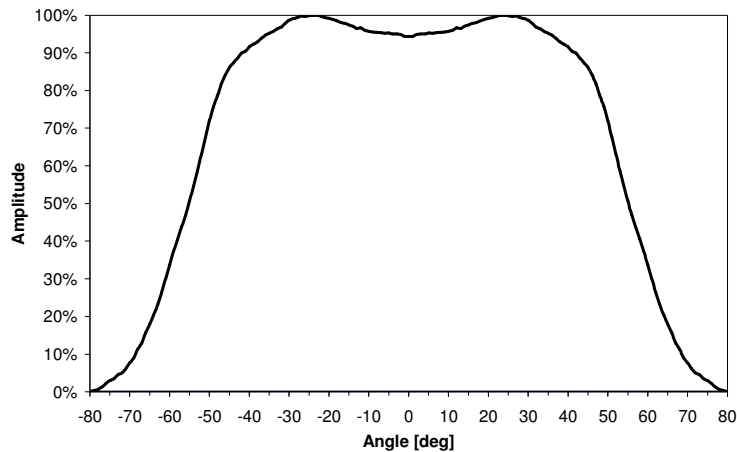


Figure 2: Field of View Curve

## FILTER CHARACTERISTICS

Parameter	Symbol	Value	Unit	Description
Transmission Range	BBP	8-14	$\mu\text{m}$	Broad Band Pass
Transmission	$T_{9 \dots 13\mu\text{m}}$	$\geq 75.0$	%	at 9 ... 13 $\mu\text{m}$

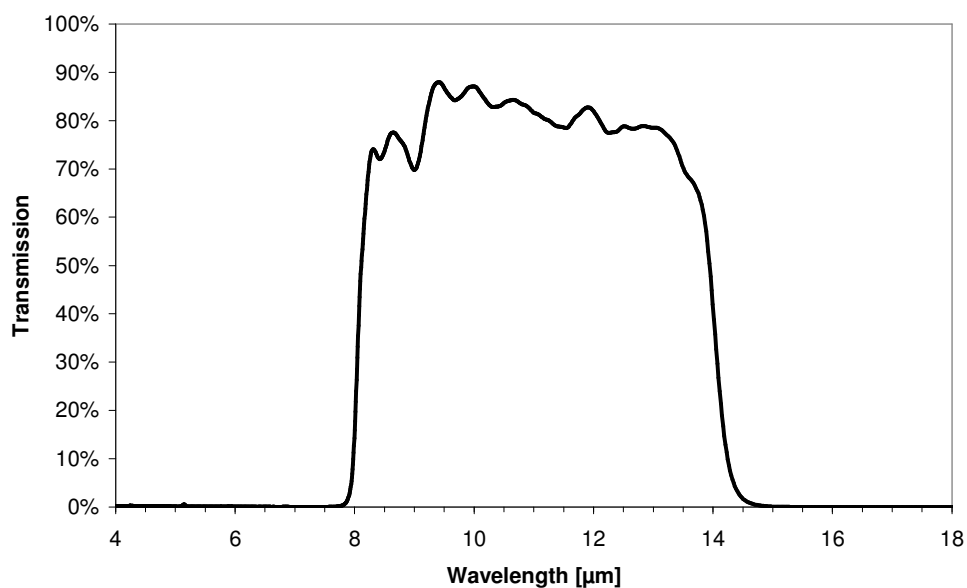


Figure 3: Filter transmission curve

# Model TS318-1B0814 Thermopile Sensor

## ELECTRICAL CONNECTIONS

Pin	Symbol
1	TP +
2	Ni-RTD
3	TP -
4	GND


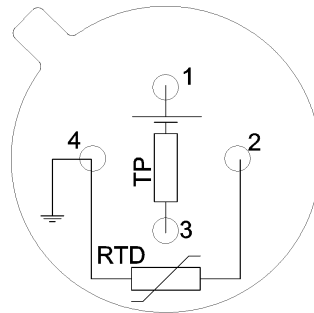



Figure 4: Electrical connections - bottom view of thermopile

## MECHANICAL DIMENSIONS

### TOP VIEW



### SIDE VIEW

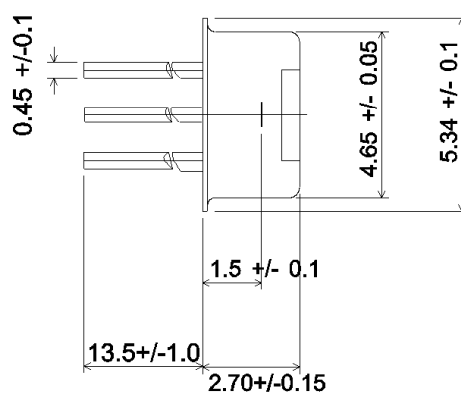

### BOTTOM VIEW

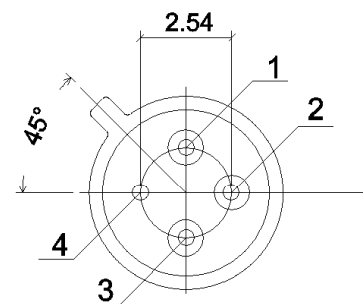


Figure 5: Mechanical dimensions of thermopile

# Model TS318-1B0814 Thermopile Sensor

## ORDERING INFORMATION

**Part Description**      TS318-1B0814

**Part No.**                G-TPCO-031

## TECHNICAL CONTACT INFORMATION

NORTH AMERICA	EUROPE	ASIA
Measurement Specialties, Inc. 1000 Lucas Way Hampton, VA 23666 United States Phone: +1-800-745-8008 Fax: +1-757-766-4297 Email: <a href="mailto:sales@meas-spec.com">sales@meas-spec.com</a> Web: <a href="http://www.meas-spec.com">www.meas-spec.com</a>	MEAS Deutschland GmbH Hauert 13 D-44227 Dortmund Germany Phone: +49-(0)231-9740-0 Fax: +49-(0)231-9740-20 Email: <a href="mailto:info.de@meas-spec.com">info.de@meas-spec.com</a> Web: <a href="http://www.meas-spec.com">www.meas-spec.com</a>	Measurement Specialties China Ltd. No. 26, Langshan Road High-tech Park (North) Nanshan District, Shenzhen 518057 China Phone: +86-755-33305088 Fax: +86-755-33305099 Email: <a href="mailto:info.cn@meas-spec.com">info.cn@meas-spec.com</a> Web: <a href="http://www.meas-spec.com">www.meas-spec.com</a>

The information in this sheet has been carefully reviewed and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Furthermore, this information does not convey to the purchaser of such devices any license under the patent rights to the manufacturer. Measurement Specialties, Inc. reserves the right to make changes without further notice to any product herein. Measurement Specialties, Inc. makes no warranty, representation or guarantee regarding the suitability of its product for any particular purpose, nor does Measurement Specialties, Inc. assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Typical parameters can and do vary in different applications. All operating parameters must be validated for each customer application by customer's technical experts. Measurement Specialties, Inc. does not convey any license under its patent rights nor the rights of others.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)  
Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)