

9200 Series/Surface Mount Reed Relays



Surface Mount Reed Relays

Ideally suited to the needs of Automated Test Equipment, Instrumentation and Telecommunications requirements, Coto's 9200 Series specification tables allow you to select the appropriate relay for your particular application. If your requirements differ, please consult your local representative or Coto's Factory to discuss a custom design.

Series Features

- ◆ High Insulation Resistance - $10^{12} \Omega$ minimum ($10^{13} \Omega$ Typical)
- ◆ High reliability, hermetically sealed contacts for long life
- ◆ Molded thermoset body on integral lead frame design
- ◆ High speed switching compared to electromechanical relays








9200 Series

- ◆ Low profile - .190" height. Meets high board density requirements
- ◆ 50 Ω Coaxial Shield for RF and Fast Rise Time Pulse switching

9290 Series

- ◆ Low profile - .193" (4.9mm) max height
- ◆ Minimum Footprint .140" Sq. (3.5mm Sq.)
- ◆ 50 Ω Co-axial Shield for RF and Fast Rise Time Pulse switching
- ◆ External Magnetic Shield
- ◆ UL Recognized
- ◆ Tape and Reel Available

Dimensions in Inches (Millimeters)

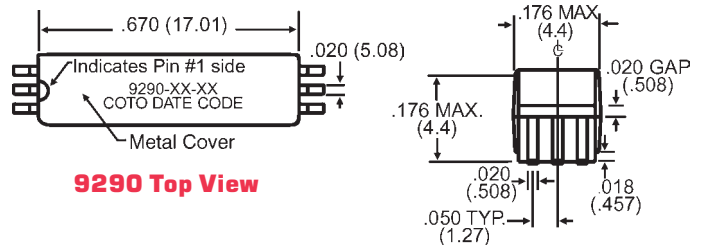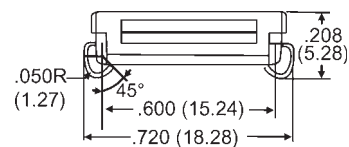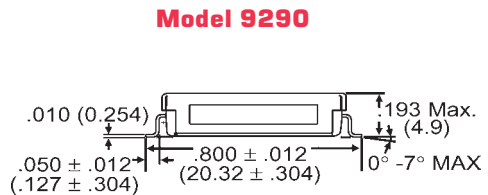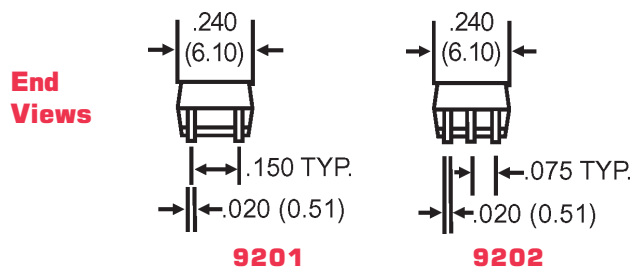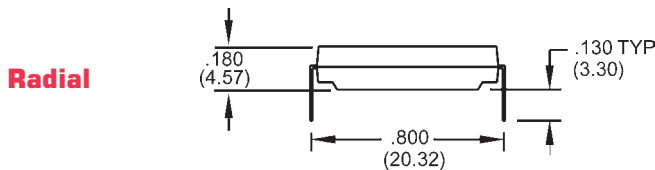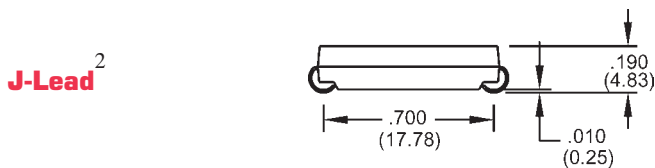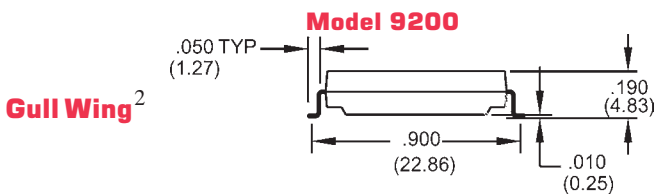


Ordering Information

| | |
|----------------|----------------------|
| Part Number | 9XXX-XX-XX |
| Model Number | Lead Style |
| 9201 9202 9290 | 00=Gull Wing |
| Coil Voltage | 20=J-Lead |
| 05=5 volts | 30=Radial (9290 N/A) |
| 12=12 volts | |

9200 Series/Surface Mount Reed Relays

| Model Number | | | 9201 | 9202 | 9290 |
|--|---|------------------------|------------------|--------------------------|--------------------------|
| Parameters | Test Conditions | Units | 1 Form A | 1 Form A 50 Ω Coaxial | 1 Form A 50 Ω Coaxial |
| COIL SPECS. | | | | | |
| Nom. Coil Voltage | | VDC | 5 12 | 5 12 | 5 12 |
| Max. Coil Voltage | | VDC | 6.5 15.0 | 6.5 15.0 | 6.5 15.0 |
| Coil Resistance | +/- 10%, 25° C | Ω | 250 650 | 150 650 | 160 600 |
| Operate Voltage | Must Operate by | VDC - Max. | 3.75 9.0 | 3.75 9.0 | 3.75 9.0 |
| Release Voltage | Must Release by | VDC - Min. | 0.4 1.0 | 0.4 1.0 | 0.4 1.0 |
| CONTACT RATINGS | | | | | |
| Switching Voltage | Max DC/Peak AC Resist. | Volts | 200 | 200 | 200 |
| Switching Current | Max DC/Peak AC Resist. | Amps | 0.5 | 0.5 | 0.5 |
| Carry Current | Max DC/Peak AC Resist. | Amps | 1.5 | 1.5 | 1.5 |
| Contact Rating | Max DC/Peak AC Resist. | Watts | 10 | 10 | 10 |
| Life Expectancy-Typical ¹ | Signal Level 1.0V, 10mA | x 10 ⁶ Ops. | 1000 | 1000 | 1000 |
| Static Contact Resistance (max. init.) | 50mV, 10mA | Ω | 0.150 | 0.150 | 0.150 |
| Dynamic Contact Resistance (max. init.) | 0.5V, 50mA at 100 Hz, 1.5 msec | Ω | 0.200 | 0.200 | 0.200 |
| RELAY SPECIFICATIONS | | | | | |
| Insulation Resistance (minimum) | Between all Isolated Pins at 100V, 25°C, 40% RH | Ω | 10 ¹² | 10 ¹² | 10 ¹² |
| Capacitance - Typical Across Open Contacts | No Shield | pF | 0.7 | - | - |
| | Shield Floating | pF | - | 0.8 | 1.0 |
| | Shield Guarding | pF | - | 0.1 | 0.2 |
| Open Contact to Coil | No Shield | pF | 1.4 | - | - |
| | Shield Floating | pF | - | 1.4 | 2.0 |
| | Shield Guarding | pF | - | 0.2 | 0.4 |
| Contact to Shield | Contacts Open, Shield Floating | pF | - | 1.4 | 2 |
| | | | | | |
| Dielectric Strength (minimum) | Between Contacts | VDC/peak AC | 300 | 300 | 250 |
| | Contacts to Shield | VDC/peak AC | - | 1500 | 500 |
| | Contacts/Shield to Coil | VDC/peak AC | 1500 | 1500 | 500 |
| Operate Time - including bounce - Typical | At Nominal Coil Voltage, 30 Hz Square Wave | msec. | 0.40 | 0.40 | 0.40 |
| Release Time - Typical | Zener-Diode Suppression ³ | msec. | 0.10 | 0.10 | 0.10 |

Top View:
Dot stamped on top of relay refers to pin #1 location

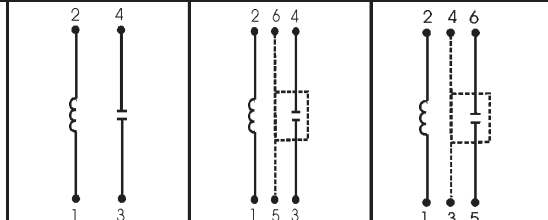

Notes:

¹Consult factory for life expectancy at other switching loads.

²Surface mount component processing temperature: 500°F / 260°C max for 1 minute dwell time. Temperature measured on leads where lead exits molded package.

³Consists of 56V Zener diode and 1N4148 diode in series, connected in parallel with coil.

Environmental Ratings:

Storage Temp: -35°C to +100°C;

Operating Temp: -20°C to +85°C

The operate and release voltage and the coil resistance are specified at 25°C. These values vary by approximately 0.4% / °C as the ambient temperature varies.

Vibration: 20 G's to 2000 Hz; Shock: 50 G's

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru