
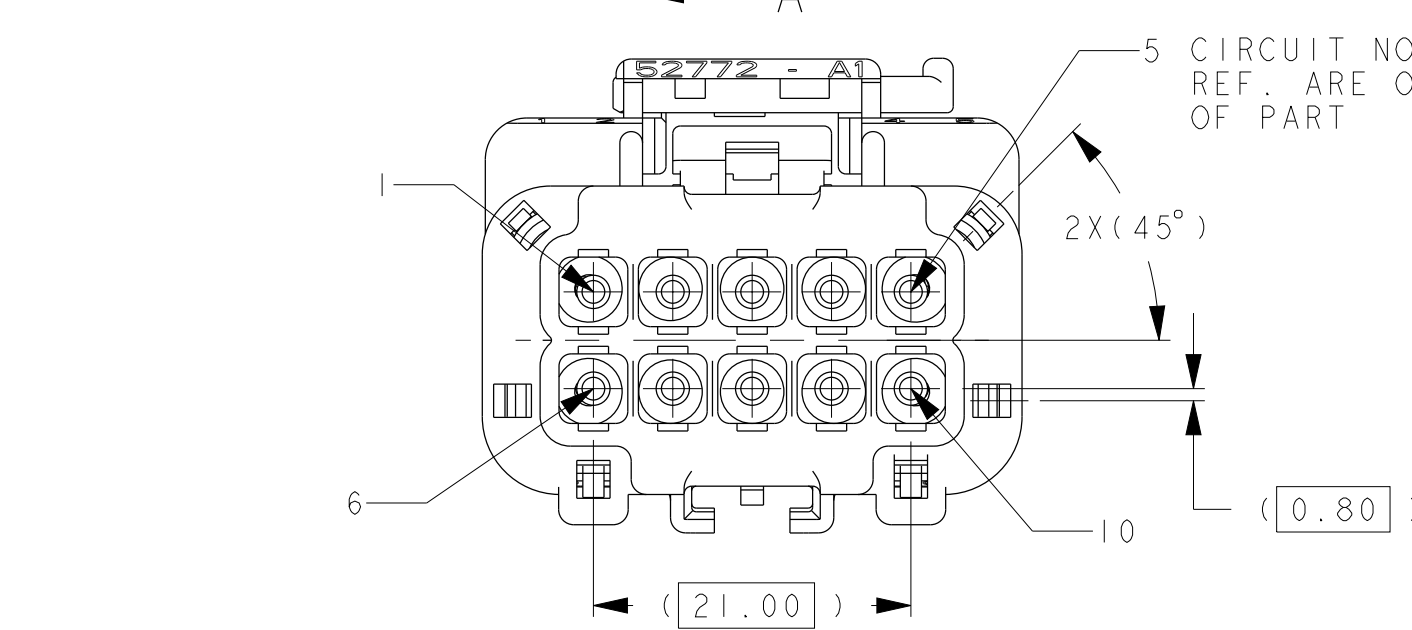
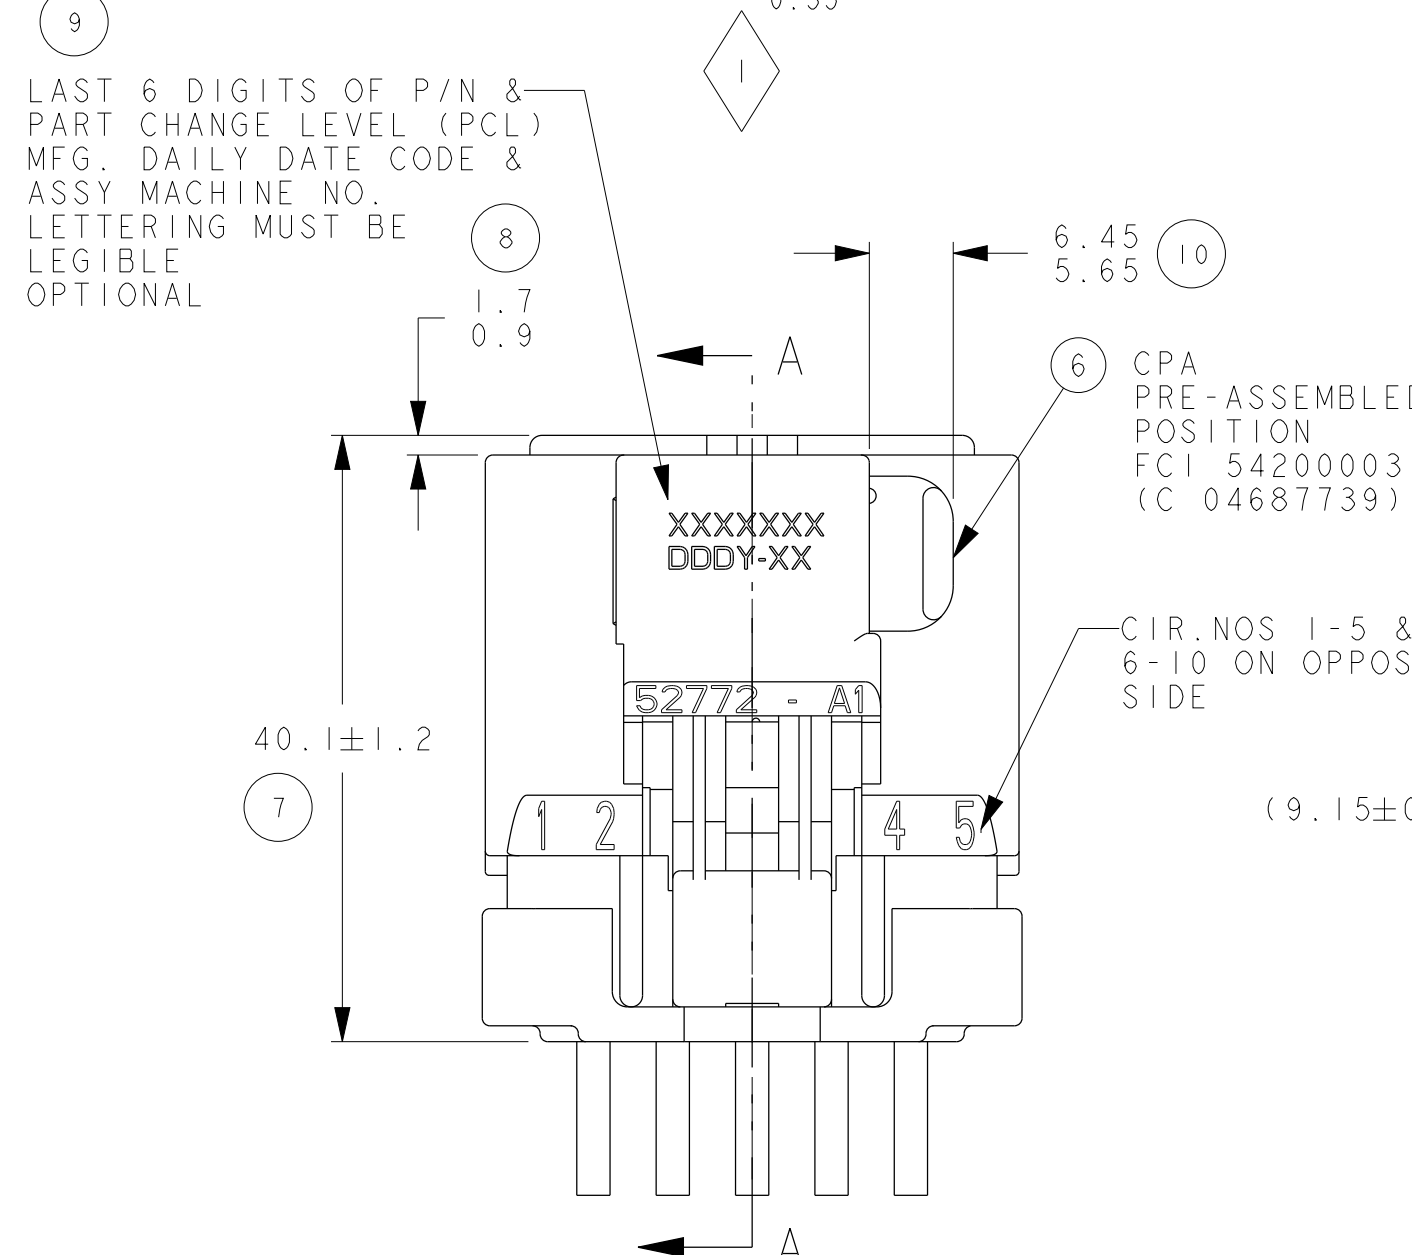
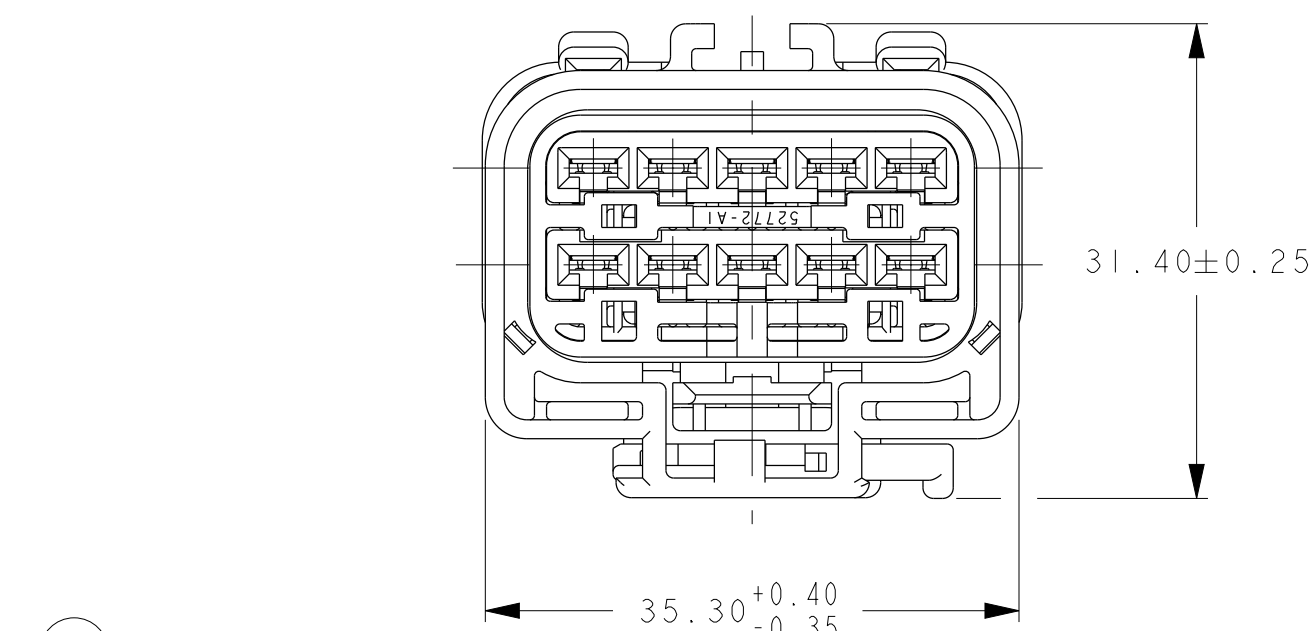
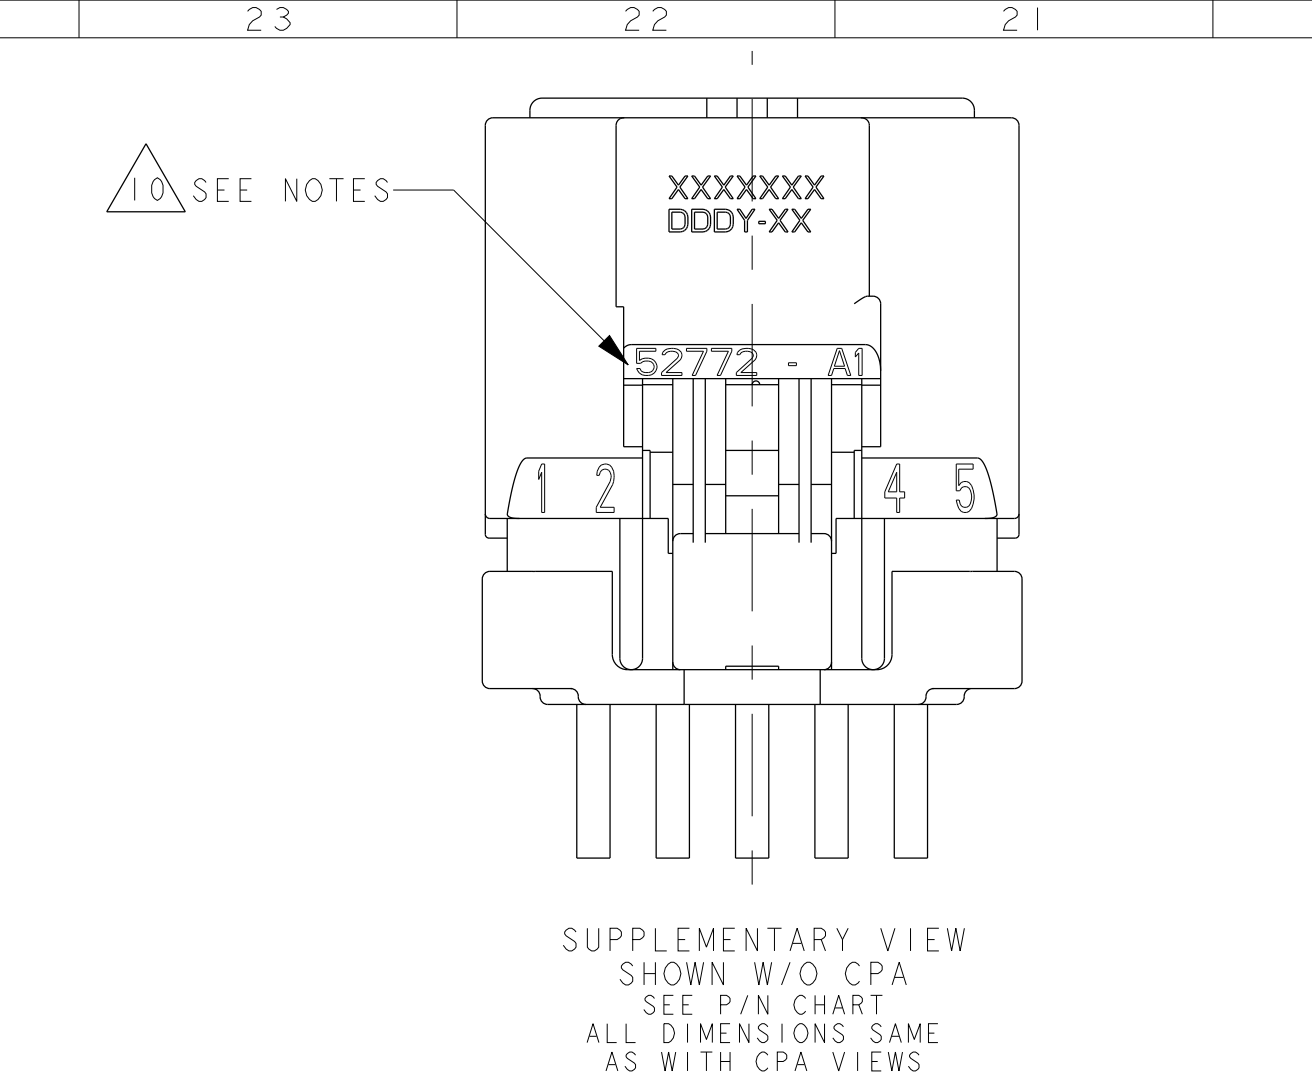
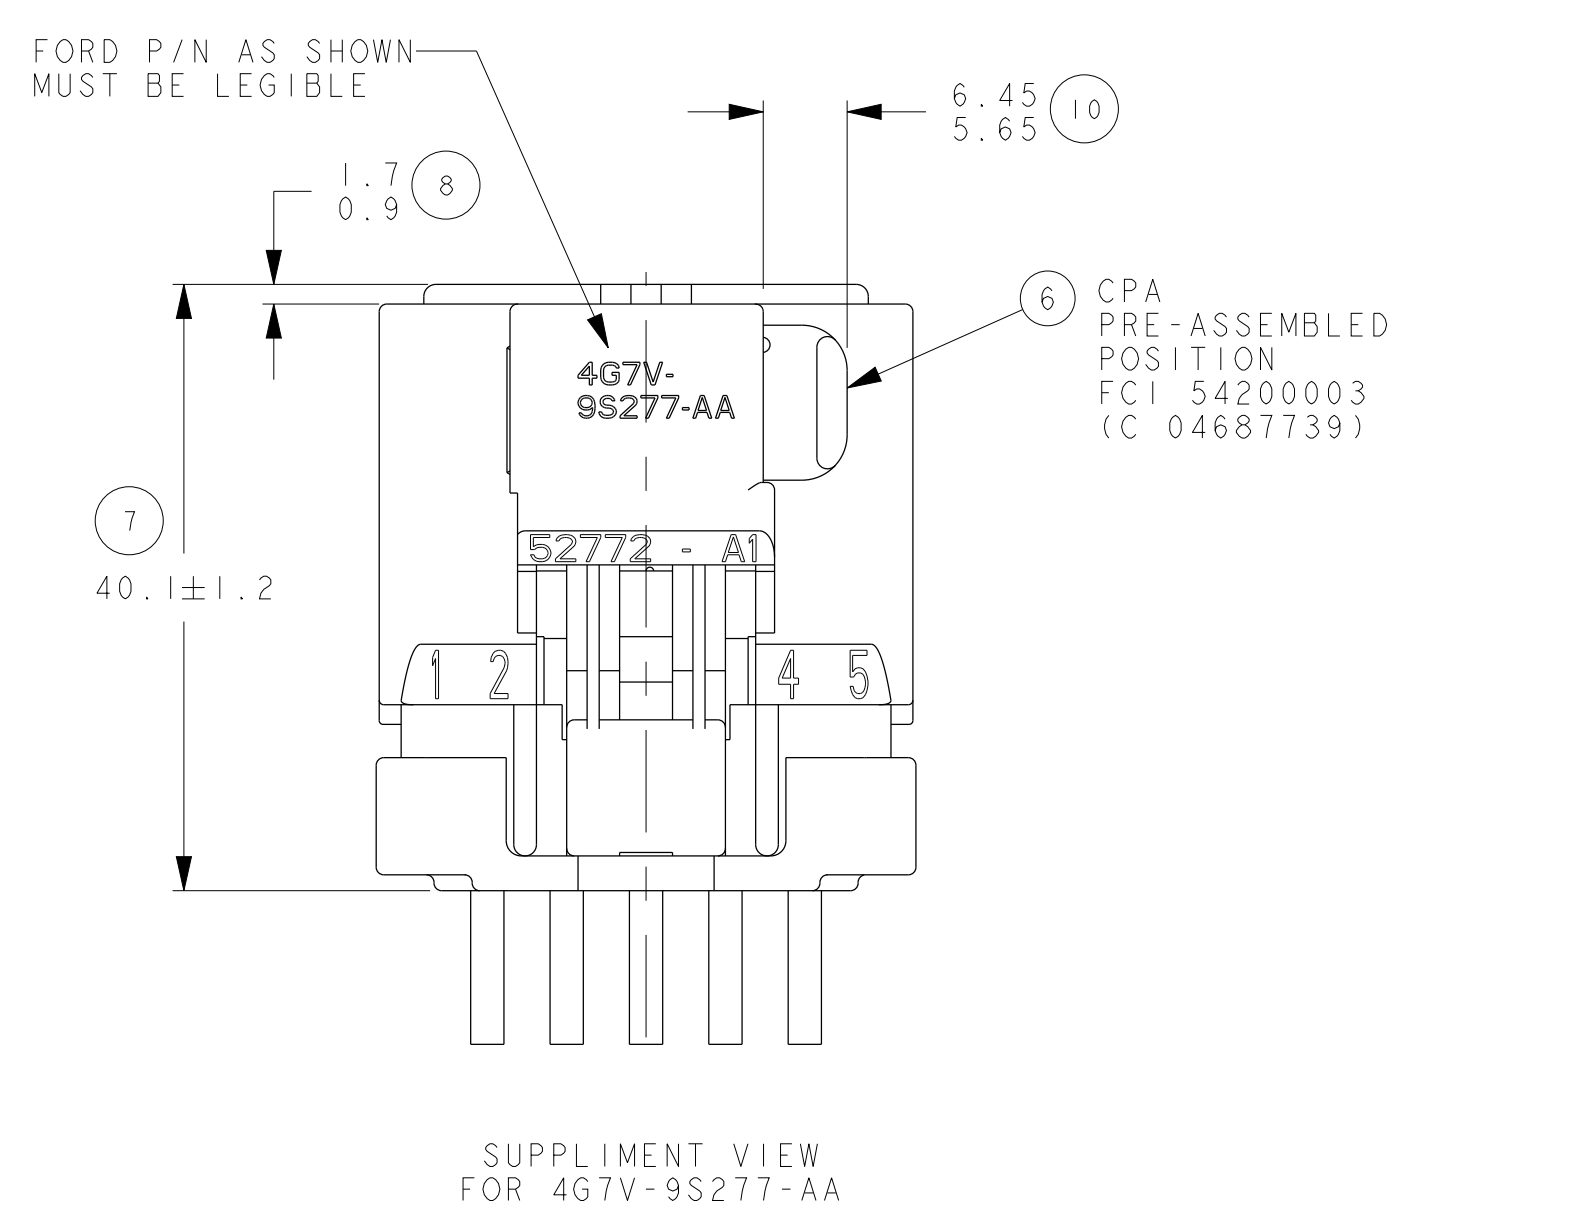
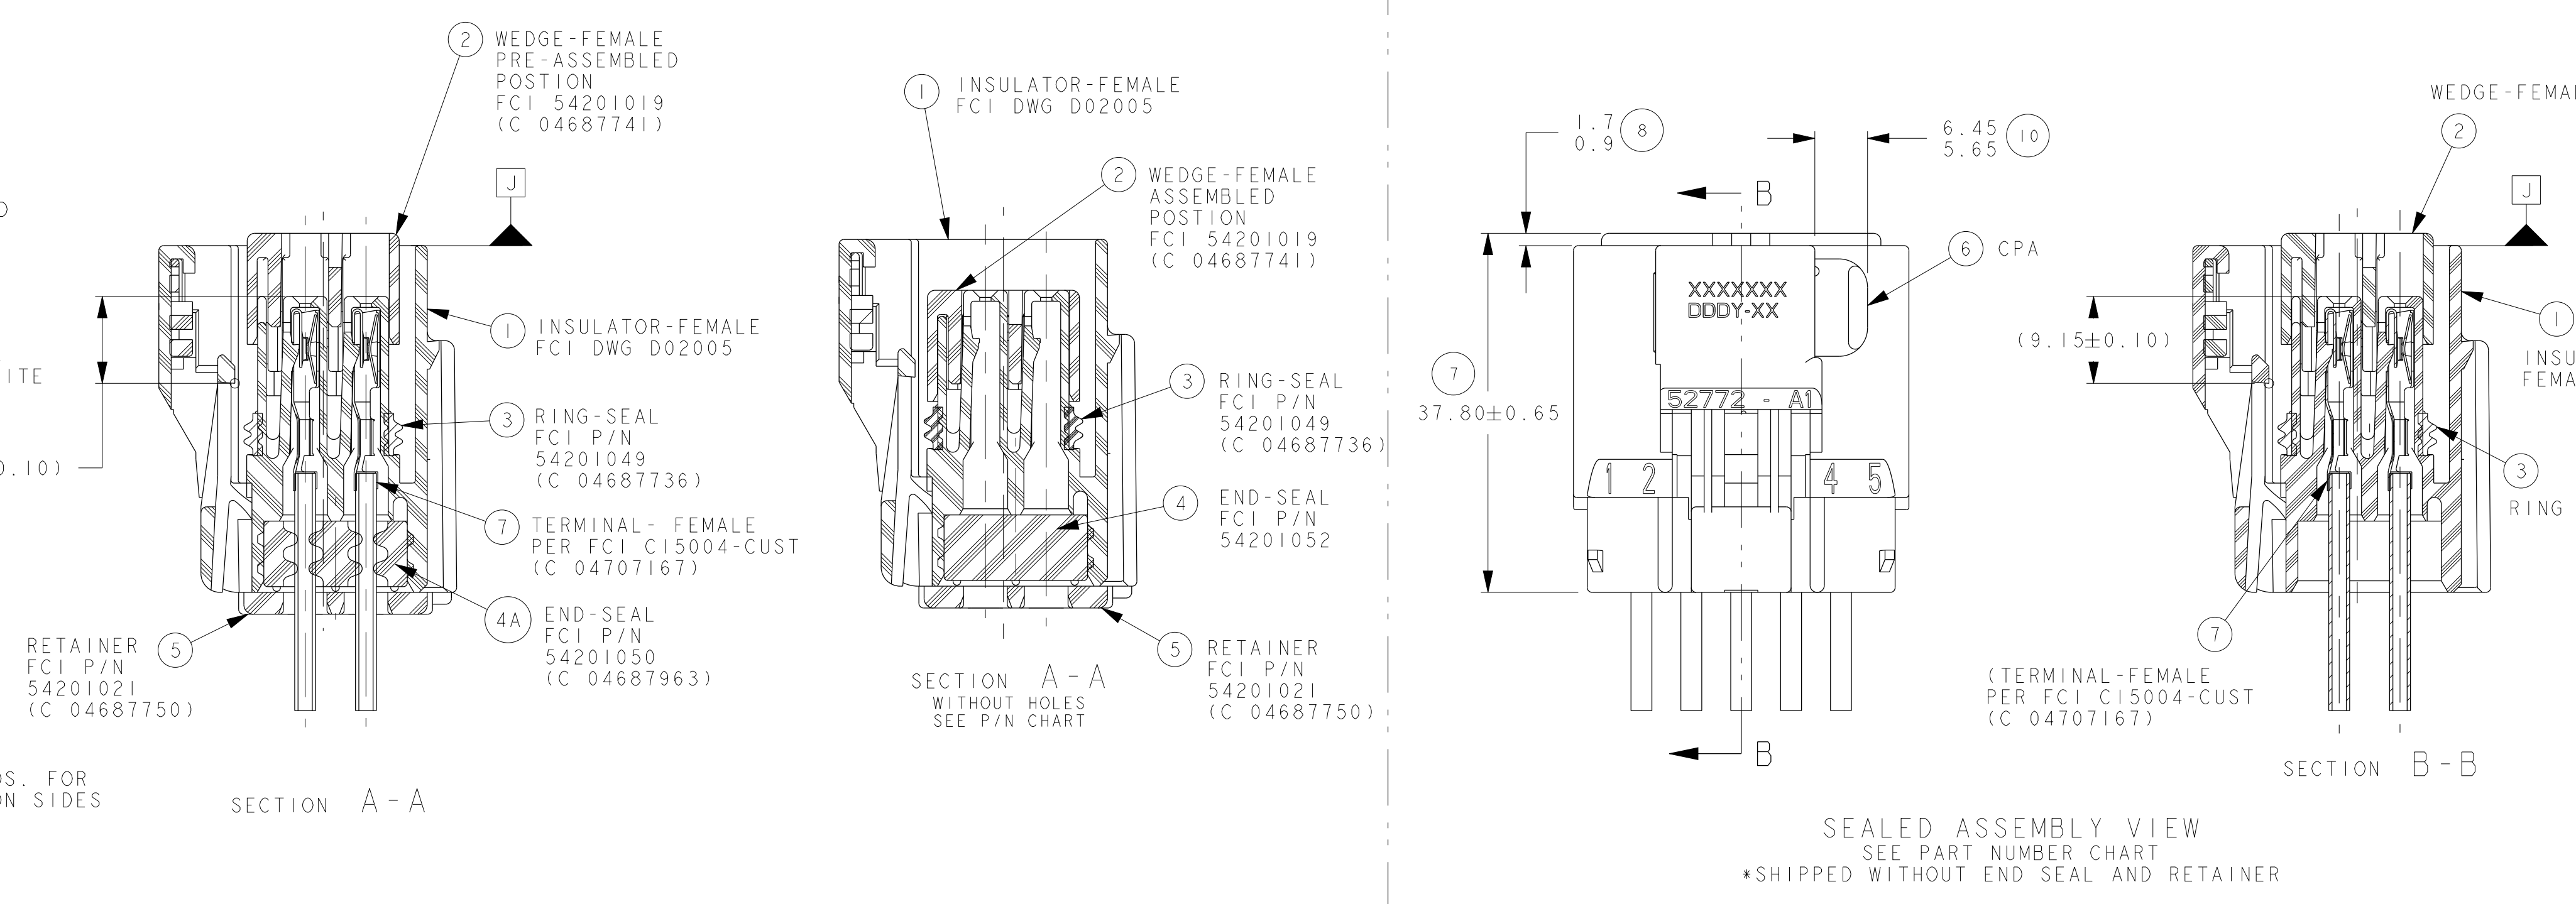


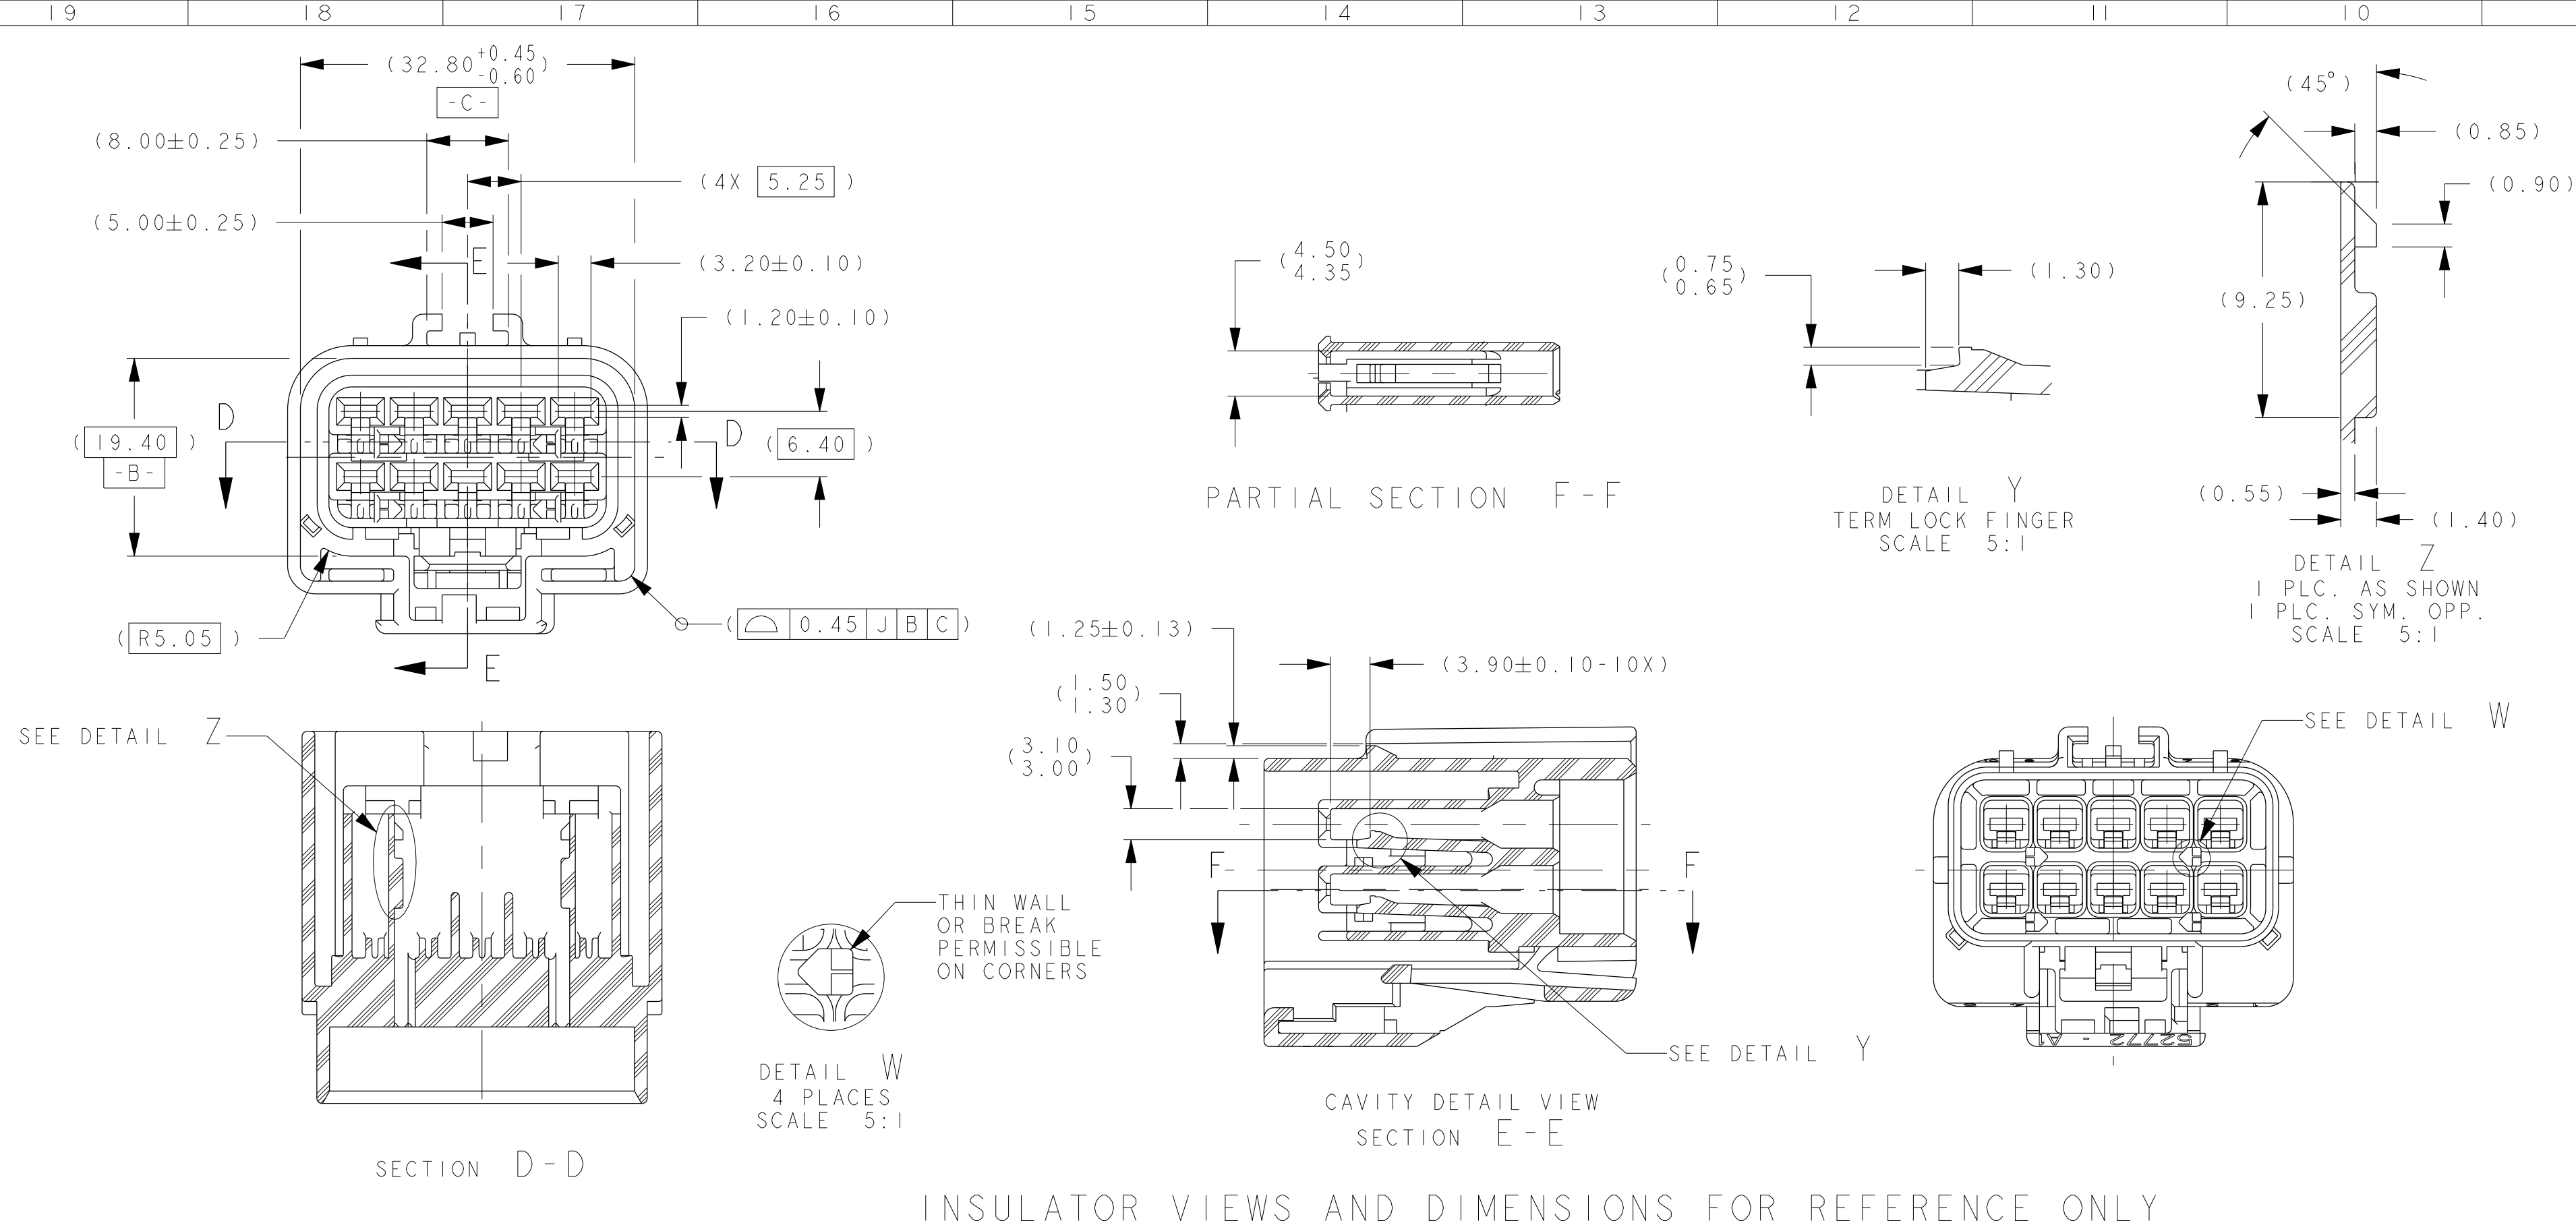


MATING PART NUMBER CHART									
G	LT BRN	SEALED	54201043N	N/A	N/A	54201042	N/A	N/A	N/A
		SEALED	54201043N	C 04686049AA	N/A	54201042	C 04686047AA	N/A	N/A
		SEALED	*54201063N	N/A	N/A	DIRECT CONNECT	DIRECT CONNECT APPLICATION INDEX	G	
		SEALED	*54201065N	N/A	N/A	DIRECT CONNECT	DIRECT CONNECT APPLICATION INDEX	F	
		UNSEALED	54201005N	N/A	N/A	DIRECT CONNECT	DIRECT CONNECT APPLICATION INDEX	F	
F	AQUA	UNSEALED	54201005S	C 04687905	7283-4809-90	DIRECT CONNECT	DIRECT CONNECT APPLICATION INDEX	F	
		SEALED	54201015N	N/A	N/A	DIRECT CONNECT	DIRECT CONNECT APPLICATION INDEX	F	
		SEALED	54201015S	C 04687899	7283-4806-90	DIRECT CONNECT	DIRECT CONNECT APPLICATION INDEX	F	
		UNSEALED	54201003N	N/A	N/A	DIRECT CONNECT	DIRECT CONNECT APPLICATION INDEX	E	
		UNSEALED	54201003S	C 04687904	7283-4808-60	DIRECT CONNECT	DIRECT CONNECT APPLICATION INDEX	E	
E	DK GRN	SEALED	54201013N	N/A	N/A	DIRECT CONNECT	DIRECT CONNECT APPLICATION INDEX	E	
		SEALED	54201013S	C 04687898	7283-4805-60	DIRECT CONNECT	DIRECT CONNECT APPLICATION INDEX	E	
		UNSEALED	54201004N	N/A	N/A	DIRECT CONNECT	DIRECT CONNECT APPLICATION INDEX	D	
		UNSEALED	54201004S	C 04687903	7283-4807-50	DIRECT CONNECT	DIRECT CONNECT APPLICATION INDEX	D	
		SEALED	54201014N	N/A	N/A	DIRECT CONNECT	DIRECT CONNECT APPLICATION INDEX	D	
D	ORANGE	SEALED	54201014S	C 04687897	7283-4804-50	DIRECT CONNECT	DIRECT CONNECT APPLICATION INDEX	D	
		SEALED	54201011N	N/A	N/A	DIRECT CONNECT	DIRECT CONNECT APPLICATION INDEX	C	
		SEALED	54201011S	C 04801117	7229-2829-40	DIRECT CONNECT	DIRECT CONNECT APPLICATION INDEX	C	
		SEALED	*54201023N	N/A	N/A	DIRECT CONNECT	DIRECT CONNECT APPLICATION INDEX	C	
		SEALED	*54201023S	C 04801112	7223-1609-40	DIRECT CONNECT	DIRECT CONNECT APPLICATION INDEX	C	
C	DK GREY	SEALED	F066900	N/A	N/A	DIRECT CONNECT	DIRECT CONNECT APPLICATION INDEX	C	
		SEALED	△ F071010	N/A	N/A	JOHN DEERE LITTLE FUSE LOAD CENTER			
		UNSEALED	54201002N	N/A	N/A	54201008	N/A	N/A	N/A
		UNSEALED	54201002S	C 04687902	7223-1109-60	54201008	C 04687911	7222-1009-60	
		SEALED	54201012N	N/A	N/A	54201018	N/A	N/A	N/A
B	LT GRN	SEALED	54201012S	C 04687896	7283-4803-60	54201018	C 04687908	N/A	N/A
		SEALED	*54201062N	N/A	N/A	DIRECT CONNECT	DIRECT CONNECT APPLICATION INDEX	C	
		SEALED	*54201064N	N/A	N/A	DIRECT CONNECT	DIRECT CONNECT APPLICATION INDEX	C	
		SEALED	F671310	N/A	N/A	DIRECT CONNECT	DIRECT CONNECT APPLICATION INDEX	B	
		UNSEALED	54201001N	N/A	N/A	54201007	N/A	N/A	N/A
		UNSEALED	54201001N	C 04687901	7283-4802-40	54201007	C 04687910	N/A	N/A
		SEALED	F961010	N/A	N/A	JOHN DEERE LITTLE FUSE LOAD CENTER			
		SEALED	54201010N	N/A	N/A	54201017	N/A	N/A	N/A
		SEALED	54201010S	C 04687895	7283-4605-40	54201017	C 04687907	7282-4605-40	
		SEALED	54201010N	C 04687895	7283-4605-40	54201024	C 04688875	7282-4605-40	
A	BLACK	SEALED	△ F956900	N/A	N/A	DIRECT CONNECT	DIRECT CONNECT APPLICATION INDEX	B	
		UNSEALED	54201000N	N/A	N/A	54201006	N/A	N/A	N/A
		UNSEALED	54201000S	C 04687900	7283-4606-30	54201006	C 04687909	N/A	N/A
		SEALED	54201009	C 04687894	7223-1605-30	54201016	C 04687906	7222-7406-30	
		SEALED	*54201022N	C 04707443	7283-4801-30	54201016	C 04687906	7222-7406-30	
		SEALED	*54201054S	C 04759589AA	7283-4901-30	54201016	C 04687906	7222-7406-30	
		SEALED	54201015A	C 04759589AA	7283-4901-30	54201058	C 56045040AA	N/A	N/A
		SEALED	54201056N	N/A	7283-4608-30	54201016	C 04687906	7222-7406-30	
		SEALED	△ F569600	N/A	N/A	DIRECT CONNECT	DIRECT CONNECT APPLICATION INDEX	A	
		SEALED	54201051N	C 04707404	N/A	DIRECT CONNECT	DIRECT CONNECT APPLICATION INDEX	A	
INDEX TYPE	COLOR	SEALED/	FCI	CUSTOMER	N/A	FCI	CUSTOMER	N/A	
			FEMALE ASSEMBLY PART NUMBERS				MATING ASSEMBLY PART NUMBERS FOR REFERENCE ONLY		

[illegible]


ITEM	CUSTOMER P/N	ICI P/N	PART NAME	MATERIAL
(1)	C 04687756	54201026	INSULATOR - FEMALE INDEX A; BLK	PA66 GF
(2)	C 04687957	54201027	INSULATOR - FEMALE INDEX B; LT GRN	PA66 GF
(3)	C 04687958	54201028	INSULATOR - FEMALE INDEX C; LT GRN	PA66 GF
(4)	C 04801111	54201029	INSULATOR - FEMALE INDEX D; GRN	PA66 GF
(5)	C 04687959	54201030	INSULATOR - FEMALE INDEX E; ORG	PA66 GF
(6)	C 04687960	54201031	INSULATOR - FEMALE INDEX E; DK GRN	PA66 GF
(7)	C 04687962	54201032	INSULATOR - FEMALE INDEX F; AQUA	PA66 GF
(8)	C 04858048AA	54201033	INSULATOR - FEMALE INDEX G; LT BROWN	PA66 GF
(9)	C 04687741	54201019	WEDGE FEMALE; ROYAL BLUE	PA66 GF
(10)	C 04687736	54201049	RING SEAL; RED	SILICONE
(11)	C 04687963	54201050	END SEAL; DK BLUE (INS. RANGE Ø 1.70 - Ø 3.35)	SILICONE
(12)	N/A	C755900	END SEAL; WHITE (INS. RANGE Ø 1.90 - Ø 3.70)	SILICONE
(13)	(1/C 30080013)	54201052	END SEAL; BRIGHT YELLOW (NO HOLES)	SILICONE
(14)	C 04687750	54201021	RETAINER; BLACK	PA66 GF
(15)	C 04687739	54200003	CPA LATCH; RED	PA66 GF

CONNECTOR ASSEMBLY TEMPERATURE CLASS PER SAE/USCAR-2 REV 5
PART CHANGE LEVEL (PCL)

△ INDICATES THIS PART AVAILABLE THROUGH TTI

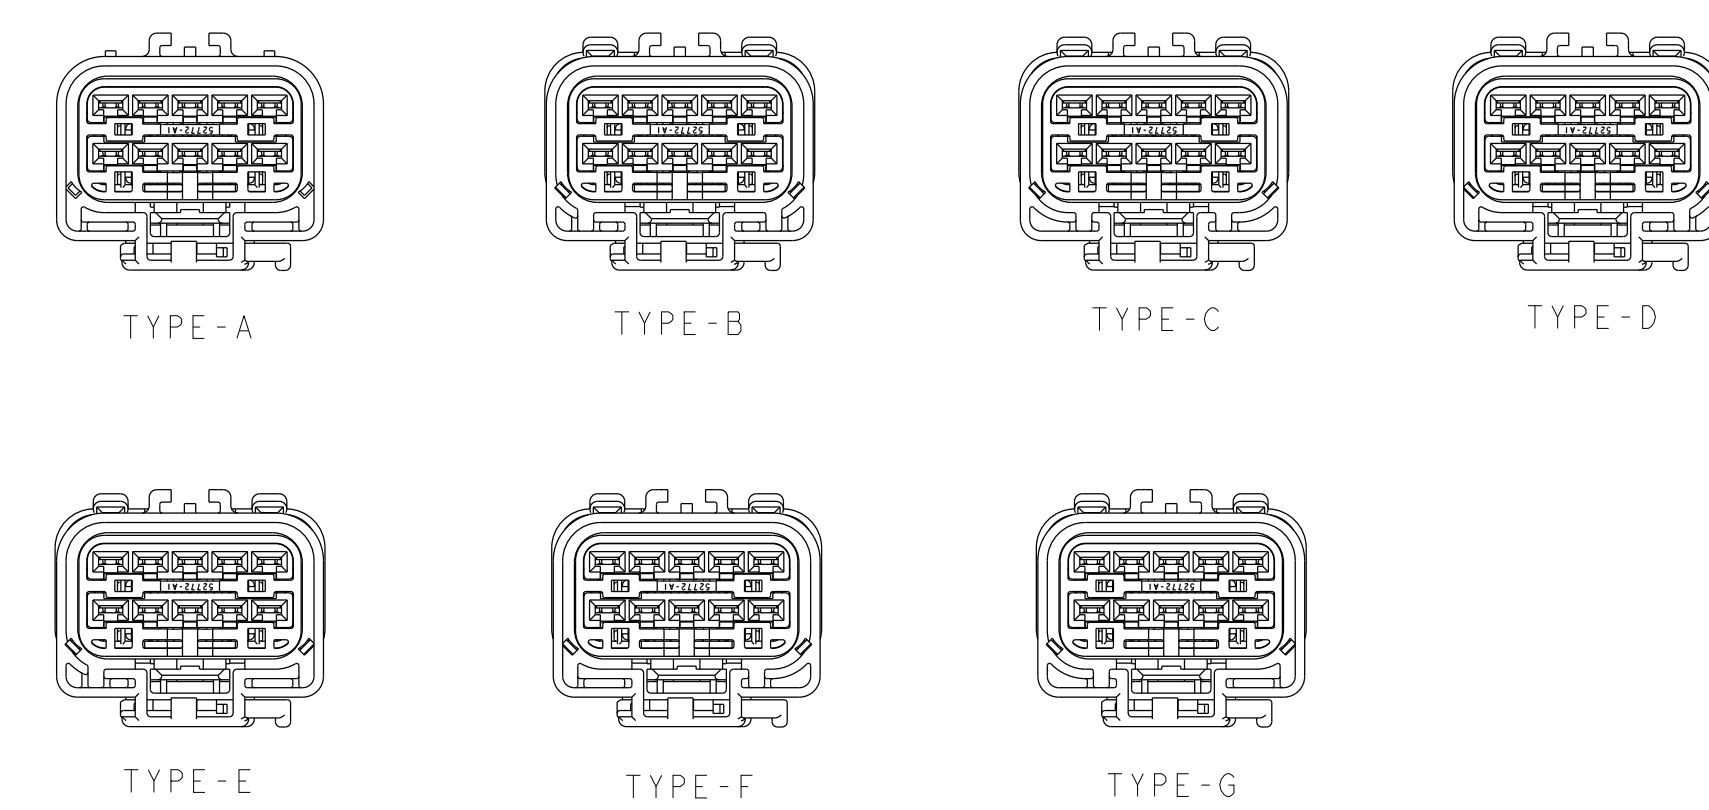

POLARIZATION OPTIONS
FULL SIZE
SHOWN WITH CPA

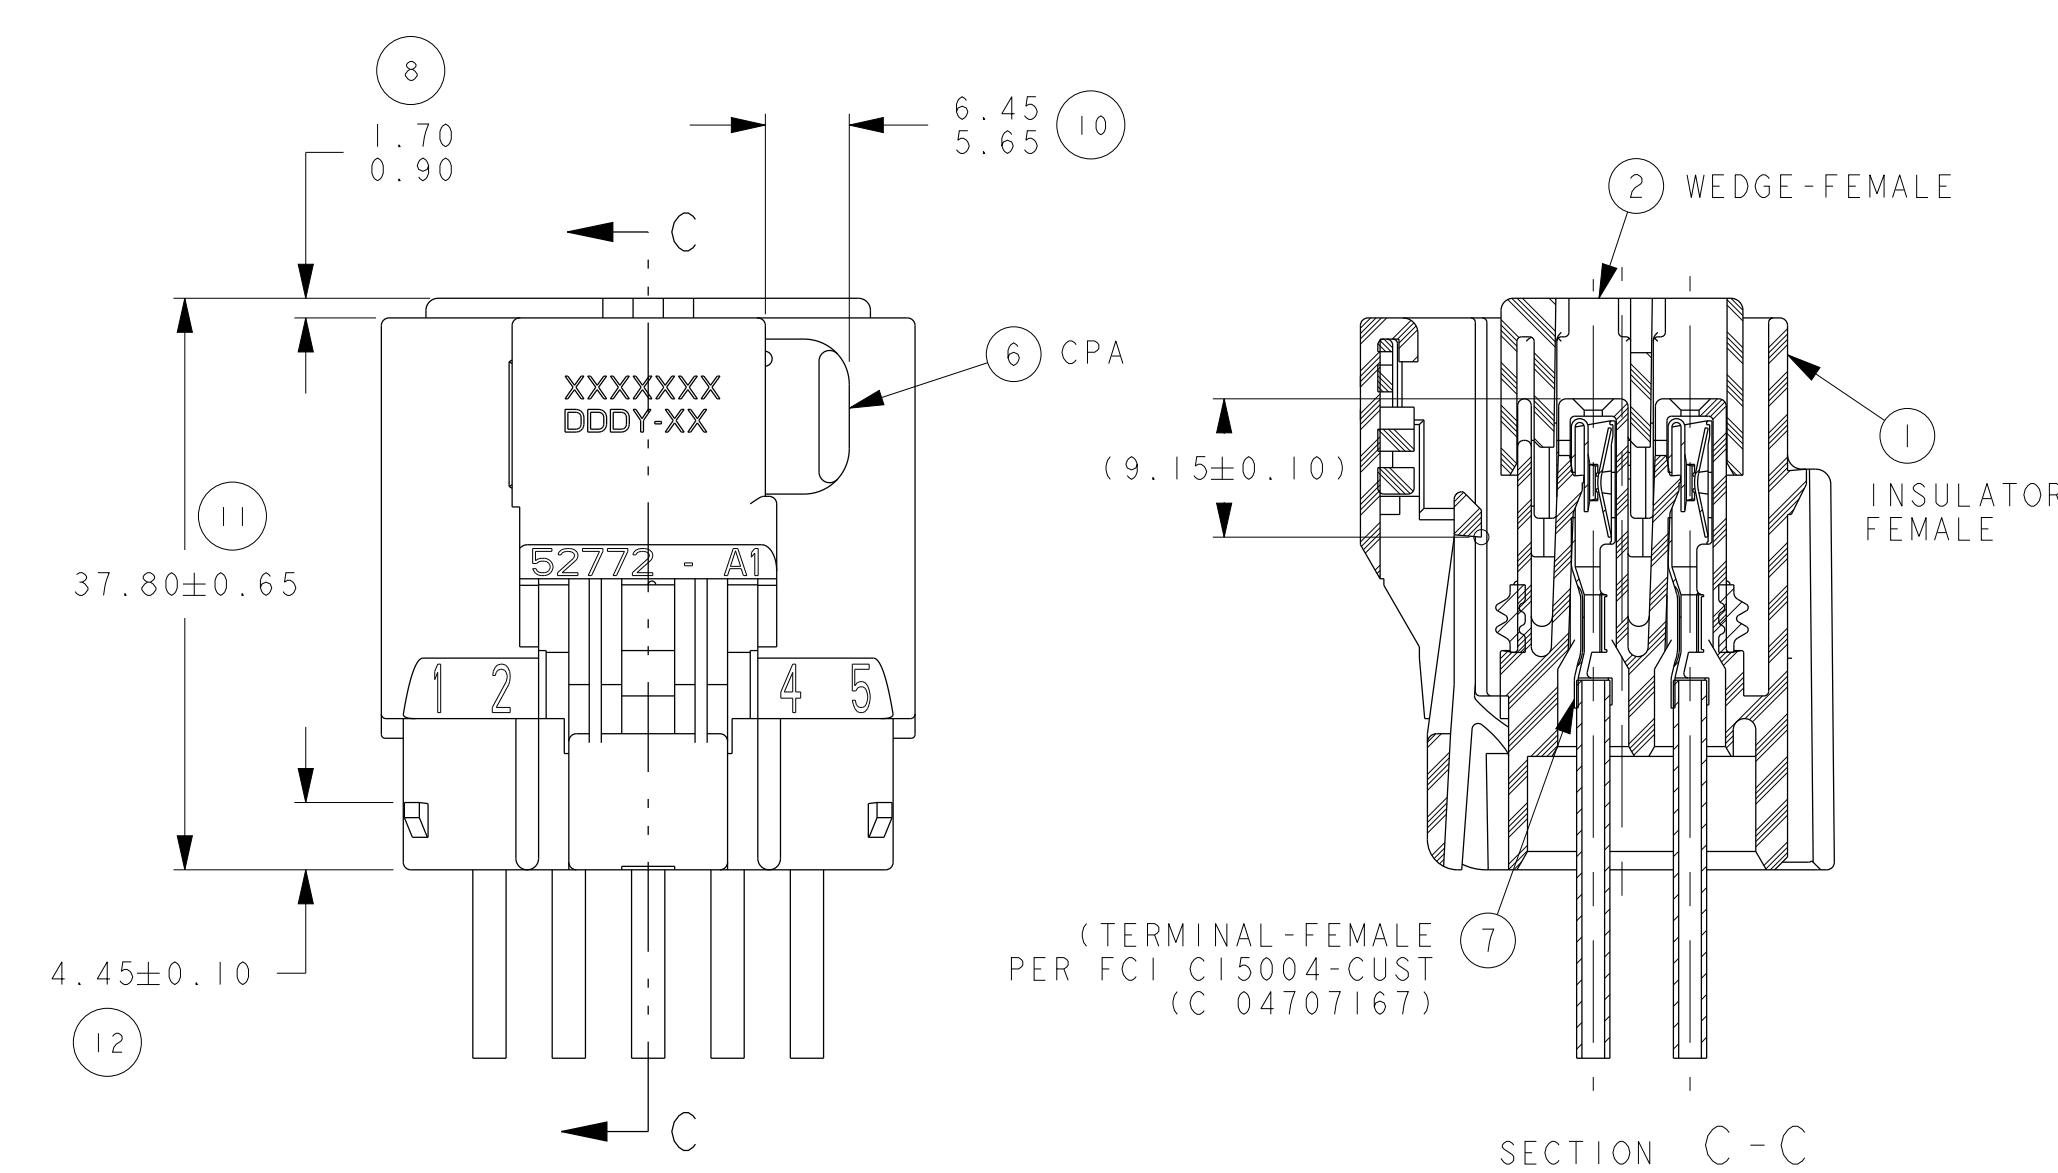

UNSEALED ASSEMBLY VIEW
SEE PART NUMBER CHART

NOTES:

- | | |
|----|---|
| 1 | QUALITY ASSURANCE REQUIREMENTS PER PS-7300: 1
SPC DATA REQUIRED |
| 2 | ENGINEERING APPROVAL OF SUPPLIER SAMPLES
IS REQUIRED PRIOR TO AUTHORIZATION OF PART
PRODUCTION |
| 3 | CHANGES IN DESIGN COMPOSITION OR PROCESSING
FROM THE PART PREVIOUSLY APPROVED FOR PART
PRODUCTION REQUIRES PRIOR ENGINEERING APPROVAL |
| 4 | WIRING FABRICATORS MUST PURCHASE FROM SOURCES SHOWN |
| 5 | ALL THE SEALED APPLICATIONS WITH 54201050 END SEAL MUST BE USED
WITH CHRYSLER WIRE SPEC. MS-8288 OR MS-9502 THIN WALL X-LINK
20,18,16,14 & 12 GAGE WIRES ONLY UNLESS OTHERWISE SPECIFIED
(W/ INSULATION RANGE Ø 1.90 MIN TO Ø3.35 MAX)
ISO THIN WALL EQUIVALENTS ALLOWED |
| 5A | P/W N WITH CTS755900 END SEAL MUST BE USED WITH WIRE INSULATION
RANGE FROM Ø1.90 MIN TO Ø3.70 MAX (18AWG TO 12AWG OR
1mm2 TO 4mm2 ISO THIN WALL) |
| 6 | ALL NON-SEALED APPLICATIONS MUST BE USED WITH ANY WIRE
INSULATION 22 GAGE THRU 10 GAGE & ISO THIN WALL EQUIVALENTS
THAT PROVIDE THE SAME TERMINAL GRIP FOR THAT CORE/INSULATION
COMBINATION IS SHOWN ON THE FEMALE TERMINAL DRAWING:
FCI C15004-CUST
MAX. INSULATION CRIMP WIDTH = 4.50
MAX. INSULATION CRIMP HEIGHT = 4.50
MAX. INSULATION DIA = 4.09 (10 GAGE THIN WALL) |



- 7 USE WITH CAVITY PLUG FCI P/N 54200005. I(C) 56038308 WHEN REQ'D
 1 USE WITH DOUBLE X-MAS TREE CLIP (C) 04707091 WHEN REQUIRED
 2 USE WITH SINGLE X-MAS TREE CLIP (C) 04625971 WHEN REQUIRED
 3 THE 8MM S/S TERMINAL IS METRICALLY ABOUT CENTER LINE AND
 4 IT CAN BE INSERTED 180° INTO TERMINAL CAVITY
- 8 DIRECT CONNECT DRAWING NO. FCI 336010 (CHRYSLER 04707028)
- 9 TEST METHOD PER CHRYSLER PERFORMANCE SPEC # SAE/USCAR-2 REV 5,
 1 CONNECT LENGTH & SEATING WITH LATCH DEPLETION FORCE NOT
 2 EXCEED 120N FOR THIS SYSTEM
- CPA SEATING FORCES - 40N MAX
 WEDGE SEATING FORCES - 120N MAX
 X-MAS TREE CLIP INSERTION FORCES - 75N MAX
- 10 SUPPLIER I.D. SIGNIFIES TOOL OWNERSHIP
 FOR REFERENCE

- ANNUAL QUALITY REQUIREMENTS:
IT IS PERMISSIBLE TO PERFORM CONTINUOUS CONFORMANCE PER
FCI SPECIFICATION #AQA-001 INSTEAD OF ANNUAL LAYOUT &
ANNUAL PV REQUIREMENTS OF QS-9000 SECTION 2 & SAE/USCAR-2 REV 5
- ALL NON-REFERENCE DIMENSIONS ARE REQUIRED
- USE INDEX A, BLACK SEALED AND UNSEALED FOR ALL AFFECTED INSULATOR CAVITIES
 - CURRENT PRODUCTION TOOLING
 - POINT OF LAST RUN

- SERVICE TOOLING GUIDE INFORMATION PER APEX TRAINING MANUAL

- △2 MUST CONFORM TO THE FOLLOWING CHRYSLER/YNA STANDARDS:
SAE/USCAR-2 REV 5 FOR LATCH PERFORMANCE & AUDIBILITY
SAE/USCAR-2 REV 5 EXCEPT AS NOTED ABOVE
PS-7300 QUALITY ASSURANCE (CHRYSLER)
PS-4480-CEK-4 (CHRYSLER) PART I.D., (G-009-2 YNA)
PS-9065 REGRIND (CHRYSLER), (G-009-3 YNA)
PS-9227 DATA EXCHANGE (CHRYSLER), (G-009-7 YNA)
PS-10052 INFORMATION SECURITY (CHRYSLER)

- THIS DRAWING (H59005) REPLACES CHRYSLER DRAWING
NUMBER 04687872 LEVEL "R"
CHRYSLER DRAWING IS FOR REFERENCE ONLY
- FCI P/N'S WITH SUFFIX "N" DESIGNATES
ASSEMBLIES W/O CPA

11-00153	D-C9	INTERNAL PAGE 6 OF PAGE6635, TITLE BLOCK UPDATED PCL NOT AFFECTED, P/N F613010									
11669	D14	RECORD CHANGE UPDATED FOR P/N F654900, F659000 & F666000 WERE ADDED AT REV "X" WAS MISSED DURING PCL CONVERSION, THE PCL OF P/N F61010 & F61011 WILL STAY AT "A" BALLONS ADDED FOR INSPECTION AND NOTES UPDATED									
11800	ALL	ASSEMBLY P/N'S F69010, F61010 ADDED, NOTES AND CHARTS UPDATED, INSULATION RANGE ADDED, REVISED AND REWOUND IN PCL									
ENL NO.	ZONE	DRAWING NUMBER				SCALE					
PROJECT TITLE	FUNCTION	APPLICATION / REV				THIS DRAWING AND ALL OTHER INFORMATION CONTAINED HEREIN IS PROPRIETARY AND THE PROPERTY OF FCJ. THIS DRAWING MAY NOT BE COPIED, REPRODUCED OR DISCLOSED IN ANY MANNER WITHOUT THE EXPRESS WRITTEN PERMISSION OF FCJ, PCL #101-101999					
APER 2.00MM		MATERIAL : SEE CHART				  					
CONTAINER NO.	ITEM NO.	DRAWING NUMBER				SCALE					
858015, G36010	020000	SEE CHART									
DO NOT REISSUE DRAWING	ITEM NO.	0001	NO.	A-039	NO. OF COPIES	AN					
DATE	NAME	CHART - ASSEMBLY				DRAWING NUMBER					
DATE	NAME	10WAY FEMALE (SEALED & UNSEALED)				H59005 X					
DATE	NAME	280MM APC CONNECTOR SYSTEM				STATE					
DATE	NAME	280MM APC CONNECTOR SYSTEM				PART NUMBER					
DATE	NAME	280MM APC CONNECTOR SYSTEM				REV.					
DATE	NAME	DOCUMENT IDENTIFY CONTROL AND NOTIFICATION ALLOWED DESIGN				See Table					

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru