

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION
ALL RIGHTS RESERVED.

© COPYRIGHT


By

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
H	—		A	INITIAL RELEASE	07APR2014	YC	BvH


UNSHIELDED

3, 4 and 5 pos PUR & PVC



3x 0.34mm²

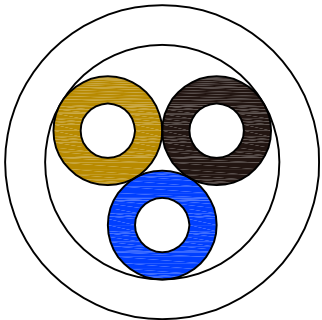

4x 0.34mm²

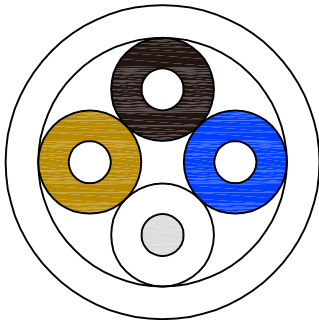


5x 0.34mm²

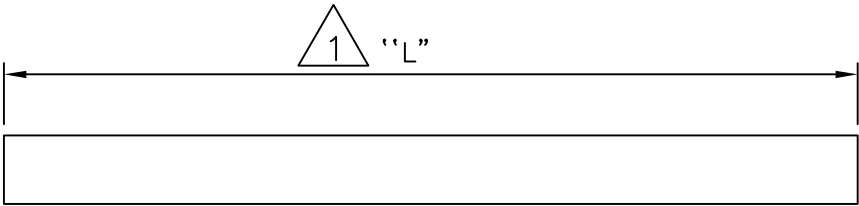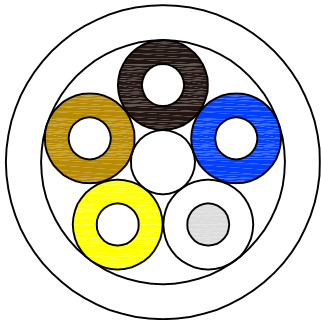

NOTE: Length "L" to be determined by online configurator

8 Pos PUR ONLY


8x 0.25mm²

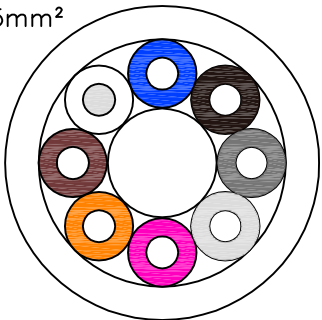


SHIELDED

3, 4 and 5 pos PUR & PVC


3x 0.34mm²

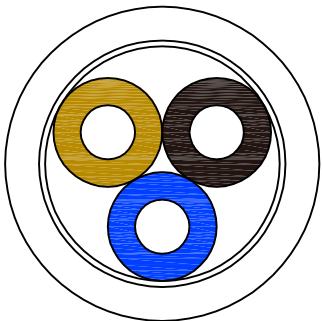

4x 0.34mm²

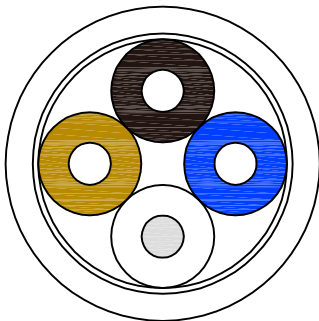


5x 0.34mm²

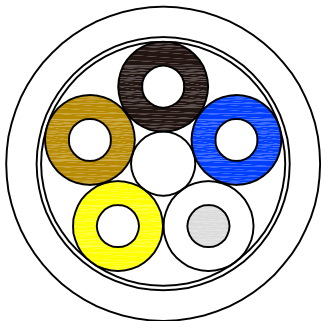

8 Pos PUR ONLY

8x 0.25mm²

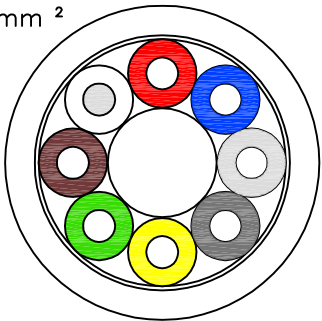

PVC	5	0.34	22	Grey	5x0.34mm ² PVC CABLE SHIELDED	3-2273231-3
	4	0.34	22	Grey	4x0.34mm ² PVC CABLE SHIELDED	3-2273231-2
	3	0.34	22	Grey	3x0.34mm ² PVC CABLE SHIELDED	3-2273231-1
PUR	8	0.25	24	Grey	8x0.25mm ² PUR CABLE SHIELDED	2-2273231-4
	5	0.34	22	Grey	5x0.34mm ² PUR CABLE SHIELDED	2-2273231-3
	4	0.34	22	Grey	4x0.34mm ² PUR CABLE SHIELDED	2-2273231-2
SHIELDED	3	0.34	22	Grey	3x0.34mm ² PUR CABLE SHIELDED	2-2273231-1
PVC	5	0.34	22	Black	5x0.34mm ² PVC CABLE UNSHIELDED	1-2273231-3
	4	0.34	22	Black	4x0.34mm ² PVC CABLE UNSHIELDED	1-2273231-2
	3	0.34	22	Black	3x0.34mm ² PVC CABLE UNSHIELDED	1-2273231-1
PUR	8	0.25	24	Grey	8x0.25mm ² PUR CABLE UNSHIELDED	2273231-4
	5	0.34	22	Black	5x0.34mm ² PUR CABLE UNSHIELDED	2273231-3
	4	0.34	22	Black	4x0.34mm ² PUR CABLE UNSHIELDED	2273231-2
UNSHIELDED	3	0.34	22	Black	3x0.34mm ² PUR CABLE UNSHIELDED	2273231-1

#cond	mm ²	AWG	JACKET COLOR	DESCRIPTION	TEPN
-------	-----------------	-----	--------------	-------------	------

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm

MATERIAL
—

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± —
1 PLC ± —
2 PLC ± —
3 PLC ± —
4 PLC ± —
ANGLES ± —
FINISH —

DWN
YATHISH C
07APR2014

CHK
B.VELDHOVEN
15APR2014

APVD
A.VAN ZANDVOORT
15APR2014

PRODUCT SPEC
—

APPLICATION SPEC
—

WEIGHT
—

CUSTOMER DRAWING

TE Connectivity

NAME
M8 M12 BULK CABLE TYPES

SIZE
A3

CAGE CODE
00779

DRAWING NO
C=2273231

RESTRICTED TO
—

SCALE
NTS

SHEET
1 of 5

REV
A

THIS DRAWING IS UNPUBLISHED.	RELEASED FOR PUBLICATION	- , - .
© COPYRIGHT - By -		ALL RIGHTS RESERVED.

LOC H	DIST —	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
			—	SEE SHEET 1	—	—	—

Unshielded PUR

2273231-1

PUR CABLE	
No./diameter of wires	3 x 0.34 mm ²
Wire isolation	PP (br, wh, bk)
C-track properties	5 million
Jacket	PUR (UL/CSA)
Outer diameter	approx. 4.3 mm
Bend radius (moving)	10 x outer diameter
Temperature range (fixed)	−40...+80 °C
Temperature range (mobile)	−25...+80 °C

2273231-4


PUR CABLE	
No./diameter of wires	8 x 0.25 mm ²
Wire isolation	PP (br, wh, bl, bk, gr, pk, vi, or)
C-track properties	2 million
Jacket	PUR (UL/CSA)
Outer diameter	approx. 6.0 mm
Bend radius (moving)	10 x outer diameter
Temperature range (fixed)	-40...+80 °C
Temperature range (mobile)	-20...+80 °C

2273231-2

PUR CABLE	
No./diameter of wires	4 x 0.34 mm ²
Wire isolation	PP (br, wh, bl, bk)
C-track properties	5 million
Jacket	PUR (UL/CSA)
Outer diameter	approx. 4.7 mm
Bend radius (moving)	10 x outer diameter
Temperature range (fixed)	-40...+80 °C
Temperature range (mobile)	-25...+80 °C

2273231-3

PUR CABLE	
No./diameter of wires	5 x 0.34 mm ²
Wire isolation	PP (br, wh, bl, bk, gnye)
C-track properties	yes
Jacket	PUR (UL/CSA)
Outer diameter	approx. 5.0 mm
Bend radius (moving)	10 x outer diameter
Temperature range (fixed)	-50...+80 °C
Temperature range (mobile)	-25...+80 °C

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN YATHISH C		07APR2014		 TE Connectivity			
		CHK B.VELDHOVEN		15APR2014					
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -		APVD A.VAN ZANDVOORT		15APR2014		NAME	
				PRODUCT SPEC		M8 M12 BULK CABLE TYPES			
				—					
				APPLICATION SPEC					
				—					
MATERIAL —		FINISH —		WEIGHT —		SIZE A3	CAGE CODE 00779	DRAWING NO C=2273231	RESTRICTED TO —
CUSTOMER DRAWING						SCALE NTS	SHEET 2 OF 5	REV A	

THIS DRAWING IS UNPUBLISHED.	RELEASED FOR PUBLICATION -,-
© COPYRIGHT - By -	ALL RIGHTS RESERVED.


LOC	DIST	REVISIONS				
H	—	P	LTR	DESCRIPTION	DATE	APVD
			—	SEE SHEET 1	—	—

Unshielded PVC

1-2273231-1	PVC CABLE	
	No./diameter of wires	3 x 0.34 mm ²
	Wire isolation	PVC (br, bl, bk)
	C-track properties	n.a.
	Jacket	PVC (UL/CSA)
	Outer diameter	approx. 4.6 mm
	Bend radius (moving)	10 x outer diameter
	Temperature range (fixed)	-30...+80 °C
	Temperature range (mobile)	-5...+80 °C

1-2273231-2	PVC CABLE	
	No./diameter of wires	4 x 0.34 mm ²
	Wire isolation	PVC (br, wh, bl, bk)
	C-track properties	n.a.
	Jacket	PVC (UL/CSA)
	Outer diameter	approx. 5.0 mm
	Bend radius (moving)	10 x outer diameter
	Temperature range (fixed)	-30...+80 °C
	Temperature range (mobile)	-5...+80 °C

1-2273231-3	PVC CABLE	
	No./diameter of wires	5 x 0.34 mm ²
	Wire isolation	PP (br, wh, bl, bk, gnye)
	C-track properties	n.a.
	Jacket	PVC (UL/CSA)
	Outer diameter	approx. 5.2 mm
	Bend radius (moving)	10 x outer diameter
	Temperature range (fixed)	-30...+80 °C
	Temperature range (mobile)	-5...+80 °C

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN YATHISH C 07APR2014		 TE Connectivity											
		CHK B.VELDHOVEN 15APR2014													
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -		NAME M8 M12 BULK CABLE TYPES											
				APVD A.VAN ZANDVOORT 15APR2014											
				PRODUCT SPEC —											
				APPLICATION SPEC —											
MATERIAL —		FINISH —		SIZE A3		CAGE CODE 00779		DRAWING NO C-2273231		RESTRICTED TO —					
				CUSTOMER DRAWING						SCALE NTS		SHEET 3 of 5		REV A	

THIS DRAWING IS UNPUBLISHED.	RELEASED FOR PUBLICATION	- , - .
© COPYRIGHT - By -		ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
H	—		—	SEE SHEET 1	—	—	—

Shielded PUR

2-2273231-1

PUR CABLE	
No./diameter of wires	3 x 0.34 mm ²
Wire isolation	PVC (br, wh, bk)
C-track properties	
Jacket	PUR/PVC (UL/CSA)
Outer diameter	approx. 5.9 mm
Bend radius (moving)	15 x outer diameter
Temperature range (fixed)	−30...+80 °C
Temperature range (mobile)	−5...+70 °C

2-2273231-4


PUR CABLE	
No./diameter of wires	8 x 0.25 mm ²
Wire isolation	PP (br, wh, bl, bk, gr, pk, vi, or)
C-track properties	2 million
Jacket	PUR (UL/CSA)
Outer diameter	approx. 7.0 mm
Bend radius (moving)	10 x outer diameter
Temperature range (fixed)	-40...+80 °C
Temperature range (mobile)	-20...+80 °C

2-2273231-2

PUR CABLE	
No./diameter of wires	4 x 0.34 mm ²
Wire isolation	PVC (br, wh, bl, bk)
C-track properties	
Jacket	PUR/PVC (UL/CSA)
Outer diameter	approx. 5.9 mm
Bend radius (moving)	15 x outer diameter
Temperature range (fixed)	−30...+80 °C
Temperature range (mobile)	−5...+70 °C

2-2273231-3

PUR CABLE	
No./diameter of wires	5 x 0.34 mm ²
Wire isolation	PVC (br, wh, bl, bk, gnye)
C-track properties	
Jacket	PUR/PVC (UL/CSA)
Outer diameter	approx. 5.9 mm
Bend radius (moving)	15 x outer diameter
Temperature range (fixed)	−40...+80 °C
Temperature range (mobile)	−5...+70 °C

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN YATHISH C		07APR2014		 TE Connectivity	
		CHK B.VELDHOVEN		15APR2014			
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD A.VAN ZANDVOORT		NAME M8 M12 BULK CABLE TYPES	
		0 PLC ± -		PRODUCT SPEC			
		1 PLC ± -		—			
		2 PLC ± -		APPLICATION SPEC			
		3 PLC ± -		—			
		4 PLC ± -					
		ANGLES ± -					
MATERIAL —		FINISH —		WEIGHT —		RESTRICTED TO —	
CUSTOMER DRAWING						SCALE N.T.S.	
						SHEET 4 of 5	
						REV A	

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru