


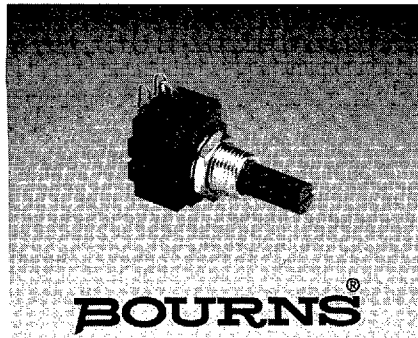

## Features

- Features one-piece molded plastic
- Available in a variety of pin-out shaft and rotor assemblies configurations
- Virtually infinite electrical circuit
- Model 96 sealed for board wash
- Metal shaft available as special feature

## 91, 93, 95, 96 - 5/8" Square Single-Turn

| Initial Electrical Characteristics*                                                  | Conductive Plastic Element                                                        | Cermet Element                                                              |
|--------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------|
| Standard Resistance Range                                                            |                                                                                   |                                                                             |
| Linear Tapers (A, B, E, & H) .....                                                   | (B & E) 150 ohms to 1 megohms .....                                               | (A & H) 50 ohms to 1 megohms                                                |
| Audio Tapers (C, D, F, G S, & T) .....                                               | (D, G, S, & T) 1K ohms to 5.0 megohms .....                                       | (C & F) 1K ohms to 5.0 megohms                                              |
| Resistance Tolerance .....                                                           | (B, D, & G tapers) $\pm 20\%$ .....                                               | (A, C, & F tapers) $\pm 10\%$                                               |
|                                                                                      | (E, S, & T tapers) $\pm 10\%$ .....                                               | (H taper) $\pm 5\%$                                                         |
| Independent Linearity .....                                                          | (B & E tapers) $\pm 5\%$ .....                                                    | (A & H tapers) $\pm 5\%$                                                    |
| Absolute Minimum Resistance .....                                                    | 2 ohms maximum .....                                                              | 2 ohms maximum                                                              |
| Continuity .....                                                                     | Maintained for full mechanical angle .....                                        | Maintained for full mechanical angle                                        |
| Effective Electrical Angle .....                                                     | 240° $\pm 5^\circ$ .....                                                          | 240° $\pm 6^\circ$                                                          |
| Contact Resistance Variation .....                                                   | $\pm 1\%$ .....                                                                   | $\pm 1\%$ or 3 ohms (whichever is greater)                                  |
| Dielectric Withstanding Voltage .....                                                | MIL-STD-202, Method 301 .....                                                     | MIL-STD-202, Method 301                                                     |
| Sea Level .....                                                                      | 1,500 VAC minimum .....                                                           | 1,500 VAC minimum                                                           |
| 70,000 Feet .....                                                                    | 500 VAC minimum .....                                                             | 500 VAC minimum                                                             |
| Insulation Resistance (500 VDC) .....                                                | 1,000 megohms minimum .....                                                       | 1,000 megohms minimum                                                       |
| Power Rating (Voltage Limited By Power<br>Dissipation or 350 VAC, Whichever Is Less) |                                                                                   |                                                                             |
| +70°C Single Section Assembly .....                                                  | (B & E tapers) 0.5 watt .....                                                     | (A & H tapers) 2 watts                                                      |
|                                                                                      | (D, G, S, & T tapers) 0.25 watt .....                                             | (C & F tapers) 1 watt                                                       |
| +70°C Multiple Section Assembly .....                                                | (B & E tapers) 0.5 watt/section .....                                             | (A & H tapers) 1 watt/section                                               |
|                                                                                      | (D, G, S, & T tapers) 0.25 watt/section .....                                     | (C & F tapers) 0.5 watt/section                                             |
| +125°C .....                                                                         | 0 watt .....                                                                      | 0 watt                                                                      |
| Roll-on/Roll-off .....                                                               | (B & E tapers) 0.25% maximum .....                                                | (A & H tapers) 0.5% maximum                                                 |
|                                                                                      | (D & S tapers) 0.1% maximum CCW end .....                                         | (C taper) 0.1% maximum CCW end                                              |
|                                                                                      | (G & T tapers) 0.1% maximum CW end .....                                          | (F taper) 0.1% maximum CW end                                               |
|                                                                                      | (D & S tapers) 0.5% maximum CW end .....                                          | (C taper) 1.0% maximum CW end                                               |
|                                                                                      | (G & T tapers) 0.5% maximum CCW end .....                                         | (F taper) 1.0% maximum CCW end                                              |
| Theoretical Resolution .....                                                         | Essentially infinite .....                                                        | Essentially infinite                                                        |
| Environmental Characteristics*                                                       |                                                                                   |                                                                             |
| Operating Temperature .....                                                          | +1°C to +125°C .....                                                              | +1°C to +125°C                                                              |
| Storage Temperature Range .....                                                      | -55°C to +125°C .....                                                             | -55°C to +125°C                                                             |
| Temperature Coefficient                                                              |                                                                                   |                                                                             |
| Over Storage Temperature Range .....                                                 | $\pm 1,000\text{PPM}/^\circ\text{C}$ .....                                        | $\pm 150\text{PPM}/^\circ\text{C}$                                          |
| Vibration (Single Section) .....                                                     | 15G .....                                                                         | 15G                                                                         |
| Total Resistance Shift .....                                                         | $\pm 2\%$ maximum .....                                                           | $\pm 2\%$ maximum                                                           |
| Voltage Ratio Shift .....                                                            | $\pm 5\%$ maximum .....                                                           | $\pm 5\%$ maximum                                                           |
| Shock (Single Section) .....                                                         | 30G .....                                                                         | 30G                                                                         |
| Total Resistance Shift .....                                                         | $\pm 2\%$ maximum .....                                                           | $\pm 2\%$ maximum                                                           |
| Voltage Ratio Shift .....                                                            | $\pm 5\%$ maximum .....                                                           | $\pm 5\%$ maximum                                                           |
| Load Life .....                                                                      | 1,000 hours .....                                                                 | 1,000 hours                                                                 |
| Total Resistance Shift .....                                                         | $\pm 10\%$ maximum .....                                                          | $\pm 5\%$ maximum                                                           |
| Rotational Life (No Load) .....                                                      | 100,000 cycles .....                                                              | 100,000 cycles                                                              |
| Total Resistance Shift .....                                                         | (B & E tapers) 10 ohms or $\pm 15\%$ maximum .....                                | 10 ohms or $\pm 10\%$ maximum                                               |
|                                                                                      | (whichever is greater)                                                            | (whichever is greater)                                                      |
|                                                                                      | (D, G, S, & T tapers) $\pm 20\%$ maximum                                          |                                                                             |
| Contact Resistance Variation @ 50,000 cycles .....                                   | (B & E tapers) $\pm 2\%$ .....                                                    |                                                                             |
|                                                                                      | (D, G, S, & T tapers) $\pm 3\%$ .....                                             |                                                                             |
| Moisture Resistance .....                                                            | MIL-STD-202, Method 103, Condition B .....                                        | MIL-STD-202, Method 103, Condition B                                        |
| Total Resistance Shift .....                                                         | (B & E tapers) $\pm 10\%$ maximum .....                                           | (All tapers) $\pm 5\%$ maximum                                              |
|                                                                                      | (D, G, S, & T tapers) $\pm 20\%$ maximum                                          |                                                                             |
| Insulation Resistance (500 VDC) .....                                                | 100 megohms minimum .....                                                         | 100 megohms minimum                                                         |
| Mechanical Characteristics*                                                          |                                                                                   |                                                                             |
| Running Torque                                                                       |                                                                                   |                                                                             |
| Single or Dual Section (A, D & r Bushings) .....                                     | 0.3 to 1.5 oz.-in. (0.21 to 1.06 Ncm) .....                                       | 0.3 to 1.5 oz.-in. (0.21 to 1.06 Ncm)                                       |
| Single or Dual Section (C & U Bushings) .....                                        | 0.2 to 1.5 oz.-in. (0.14 to 1.06 Ncm) .....                                       | 0.2 to 1.5 oz.-in. (0.14 to 1.06 Ncm)                                       |
| Starting Torque .....                                                                | 0.3 maximum above average running torque .....                                    | 0.3 maximum above average running torque                                    |
| Torque Variation .....                                                               | 0.5 oz.-in. (0.35 Ncm) max. in 45° shaft travel .....                             | 0.5 oz.-in. (0.35 Ncm) max. in 45° shaft travel                             |
| Stop Strength (1/4" D shaft) .....                                                   | 4 in.-lb. (45.19 Ncm) .....                                                       | 4 in.-lb. (45.19 Ncm)                                                       |
| (1/8" D shaft) .....                                                                 | 3 in.-lb. (33.89 Ncm) .....                                                       | 3 in.-lb. (33.89 Ncm)                                                       |
| Mechanical Angle .....                                                               | 300° $\pm 5^\circ$ .....                                                          | 300° $\pm 5^\circ$                                                          |
| Weight (Single Section) .....                                                        | 7 grams maximum .....                                                             | 7 grams maximum                                                             |
| Each Additional Section .....                                                        | 4 grams maximum .....                                                             | 4 grams maximum                                                             |
| Terminals .....                                                                      | Printed circuit terminals, J-Hooks or solder lugs .....                           | Printed circuit terminals, J-Hooks or solder lugs                           |
| Marking .....                                                                        | Manufacturer's trademark, date code, resistance, manufacturer's part number ..... | Manufacturer's trademark, date code, resistance, manufacturer's part number |

FOR DIMENSIONAL DRAWINGS SEE PAGE 208.

FOR ORDERING INFORMATION SEE PAGE 209.

NOTE: ALL MODEL 90 PERFORMANCE SPECIFICATIONS DO NOT APPLY TO UNITS SUBJECTED TO PRINTED CIRCUIT BOARD CLEANING PROCEDURES, EXCEPT FOR THE SEALED VERSION (MODEL 96).

\*AT ROOM AMBIENT: +25°C NOMINAL AND 50% RELATIVE HUMIDITY NOMINAL, EXCEPT AS NOTED.


Specifications are subject to change without notice.

D 21F 1556573 0002096 69T


# 91, 93, 95, 96 Dimensions and Tolerances

**BOURNS®**



## Model 91 PC Pin Terminals, In-Line

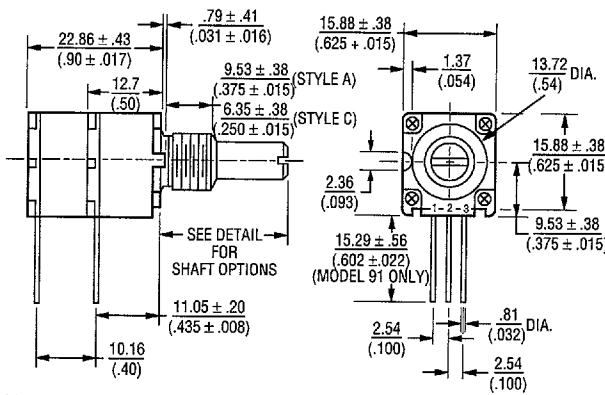

## Model 95 Solder Lug Terminals, "Triangular" Pattern

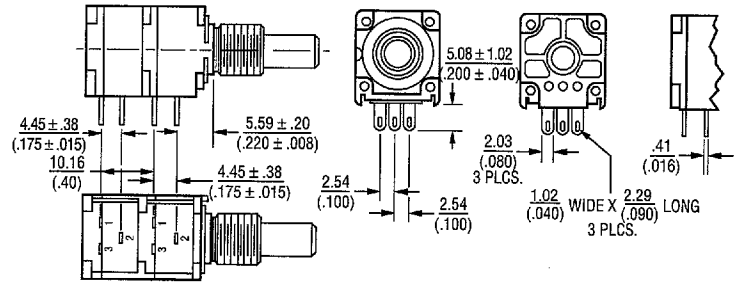


## Model 93 PC Pin Terminals, "L" Pattern

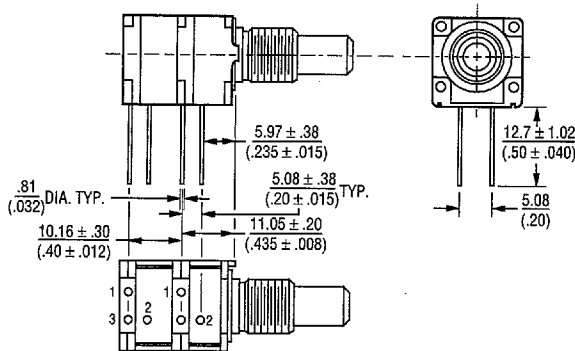


Switch contacts shown in detent position.

## Bushing Styles


3/8 THREADLESS (9.53mm) (STYLE "D")  
3/8-32 UNEF (9.53mm) (STYLE "A")  
1/4-32 UNEF (6.35mm) (STYLE "C")  
M10 X 0.75-6g (STYLE "R")  
M7 X 0.75-6g (STYLE "U")



## Shaft Styles

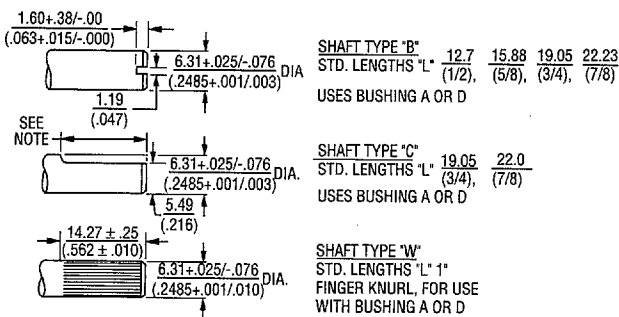

TOLERANCES EXCEPT AS SHOWN: DECIMAL .XXX ±  $\frac{.128}{.015}$  FRACTION ± 1/64  
XX ±  $\frac{.005}{.38}$  ANGLE ± 5°

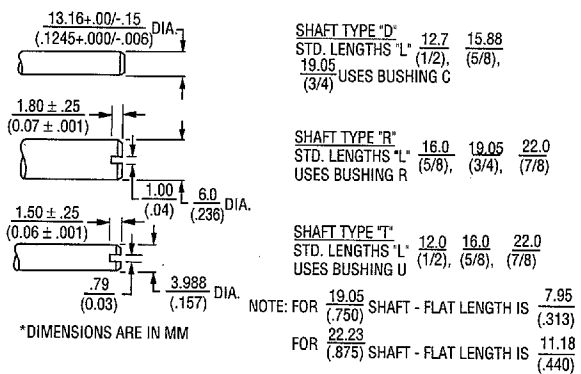


\*DIMENSIONS ARE IN MM

DIMENSIONS ARE: METRIC  
(INCHES)

# 90 Series Panel Controls Dimensions and Tolerances **BOURNS®**

## How To Order

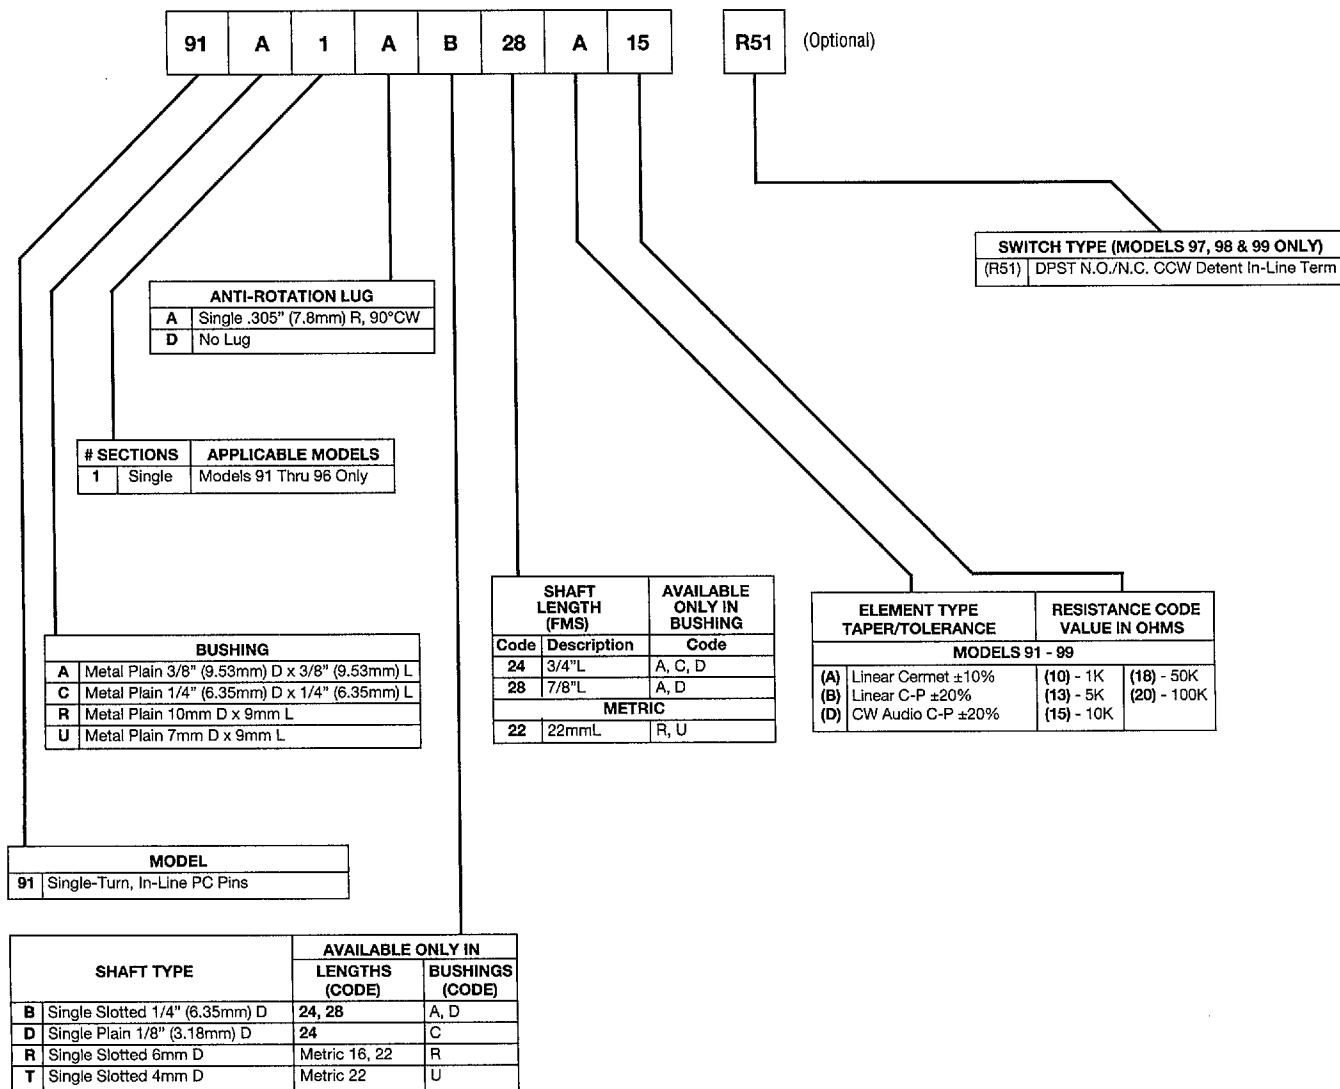

Recommended part numbers.  
For other options contact the factory.  
Boldface listings are in stock and readily available through distribution.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)