

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0432550129](#)
Status: **Active**
Overview: [mlx](#)
Description: 6.35mm (.250") Pitch MLX™ Power Connector Header, Vertical, with Plastic Polarizing Peg, 4 Circuits, PA Polyamide Nylon 6/6 94V-2, Tin (Sn) Plating, Natural (Nylon Off White)

Documents:
[3D Model](#)
[Drawing \(PDF\)](#)
[Product Specification PSX-42002-0001 \(PDF\)](#)
[RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification


CSA	LR19980
UL	E29179

General

Product Family	PCB Headers
Series	43255
Application	Wire-to-Board
Comments	High Vibration Application
Overview	mlx
Product Name	MLX™

Physical

Breakaway	No
Circuits (Loaded)	4
Circuits (maximum)	4
Color - Resin	Natural
Durability (mating cycles max)	50
First Mate / Last Break	No
Flammability	94V-2
Glow-Wire Compliant	No
Guide to Mating Part	Yes
Keying to Mating Part	Yes
Lock to Mating Part	Yes
Mated Height (in)	1.195 In
Mated Height (mm)	30.35 mm
Material - Metal	Phosphor Bronze
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Material - Resin	Nylon
Number of Rows	1
Orientation	Vertical
PC Tail Length (in)	0.169 In
PC Tail Length (mm)	4.30 mm
PCB Locator	Yes
PCB Retention	Yes
PCB Thickness Recommended (in)	0.062 In
PCB Thickness Recommended (mm)	1.60 mm
Packaging Type	Bag
Pitch - Mating Interface (in)	0.250 In
Pitch - Mating Interface (mm)	6.35 mm
Pitch - Term. Interface (in)	0.250 In
Pitch - Term. Interface (mm)	6.35 mm
Plating min: Mating (µin)	140
Plating min: Mating (µm)	3.5

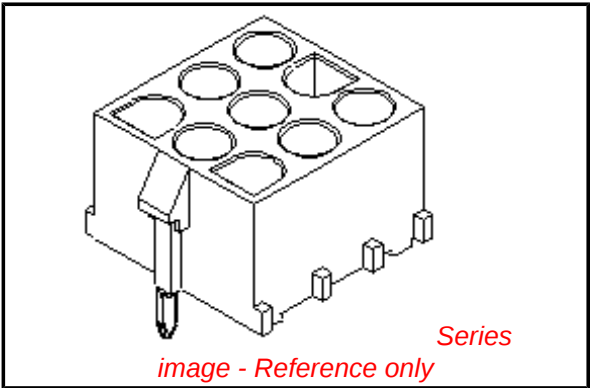

EU RoHS
ELV and RoHS
Compliant
REACH SVHC
Contains SVHC: No
Halogen-Free
Status
Not Reviewed

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series
[43255Series](#)

Mates With
[42021](#) MLX™ Power Crimp Housing Plug.
[42024](#) MLX Crimp Terminal

Polarized to Mating Part	Yes
Polarized to PCB	Yes
Shrouded	Fully
Stackable	No
Surface Mount Compatible (SMC)	No
Temperature Range - Operating	-55°C to +105°C
Termination Interface: Style	Through Hole
Electrical	
Current - Maximum per Contact	15A
Voltage - Maximum	600V
Solder Process Data	
Lead-free Process Capability	Wave Capable (TH only)
Material Info	
Reference - Drawing Numbers	
Packaging Specification	PK-43255-001
Product Specification	PSX-42002-0001

This document was generated on 05/24/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1
	ITEM NO.	CIRCUIT SIZE	MATERIAL COLOR (SEE NOTE 1)	PIN (1) OR SOCKET (2) TERMINALS	TERMINAL PLATING (SEE NOTE 2)	TERMINAL LENGTH (SEE NOTE 3)	"A" DIM ±.015													
M	43255-0057	2	A	2	A	1	.17/(4,3)													
	43255-0058		A	2	B	1														
	43255-0059		B	1	A	1														
	43255-0060		B	1	B	1														
	43255-0061		A	2	A	2	.23/(5,8)													
	43255-0062		A	2	B	2														
L	43255-0063	3	B	1	A	2														
	43255-0064		B	1	B	2														
	43255-0065		A	2	A	1	.17/(4,3)													
	43255-0066		A	2	B	1														
	43255-0067		B	1	A	1														
	43255-0068		B	1	B	1														
K	43255-0069	4	A	2	A	2	.23/(5,8)													
	43255-0070		A	2	B	2														
	43255-0071		B	1	A	2														
	43255-0072		B	1	B	2														
	43255-0073		A	2	A	1	.17/(4,3)													
	43255-0074		A	2	B	1														
J	43255-0075	6	B	1	A	1														
	43255-0076		B	1	B	1														
	43255-0077		A	2	A	2	.23/(5,8)													
	43255-0078		A	2	B	2														
	43255-0079		B	1	A	2														
	43255-0080		B	1	B	2														
I	43255-0081	9	A	2	A	1	.17/(4,3)													
	43255-0082		A	2	B	1														
	43255-0083		B	1	A	1														
	43255-0084		B	1	B	1														
	43255-0085		A	2	A	2	.23/(5,8)													
	43255-0086		A	2	B	2														
H	43255-0087	12	B	1	A	2														
	43255-0088		B	1	B	2														
	43255-0089		A	2	A	1	.17/(4,3)													
	43255-0090		A	2	B	1														
	43255-0091		B	1	A	1														
	43255-0092		B	1	B	1														
G	43255-0093	15	A	2	A	2	.23/(5,8)													
	43255-0094		A	2	B	2														
	43255-0095		B	1	A	2														
	43255-0096		B	1	B	2														
	43255-0097		A	2	A	1	.17/(4,3)													
	43255-0098		A	2	B	1														
F	43255-0099	15	B	1	A	1														
	43255-0100		B	1	B	1														
	43255-0101		A	2	A	2	.23/(5,8)													
	43255-0102		A	2	B	2														
	43255-0103		B	1	A	2														
	43255-0104		B	1	B	2														
E	43255-0105	15	A	2	A	1	.17/(4,3)													
	43255-0106		A	2	B	1														
	43255-0107		B	1	A	1														
	43255-0108		B	1	B	1														
	43255-0109		A	2	A	2	.23/(5,8)													
	43255-0110		A	2	B	2														
	43255-0111		B	1	A	2														
	43255-0112		B	1	B	2														

EC NO: D2007-0146
DRAWN BY: CHOKKASUDHIR
CHKD BY: SSUDHIR
APPV: SSUDHIR

2006/11/03
2006/11/03
2006/11/03

QUALITY SYMBOLS
▽=0
▽=0

DESCRIPTION

REV

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	±---	±---
3 PLACES	±---	±---
2 PLACES	±---	±---
1 PLACE	±---	±---

ANGULAR ±---°

DIMENSION STYLE
IN/MM

DRAWN BY	DATE
SSUDHIR	2004/06/08
CHECKED BY	DATE
GJLOWE	2004/06/08
APPROVED BY	DATE
GJLOWE	2004/06/08

SCALE

DESIGN UNITS
INCH

THIRD ANGLE PROJECTION

HEADER HOUSING ASSEMBLY
0.84/(2.13) DIA. SERIES
COMPLIANT-POLARIZING PEG

MOLEX

MOLEX INCORPORATED

MATERIAL NO.
SEE CHART

DOCUMENT NO.
SDA-43255-00**

SHEET NO.
3 OF 4

DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONS

SIZE
A1

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX
INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

RoHS COMPLIANT

Rev. 0 2004/04/02

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru