

GV7RE100

TeSys GV7 Manual Starter and Protector, thermal magnetic circuit protector, rocker lever, 3 P, AC-3, 60...100 A



Main

| | |
|---|---|
| Range | TeSys |
| Product name | TeSys GV7 |
| Device short name | GV7R |
| Product or component type | Circuit breaker |
| Device application | Motor |
| Poles description | 3P |
| Network type | AC |
| Utilisation category | AC-3 conforming to IEC 60947-4-1 |
| Network frequency | 50/60 Hz conforming to IEC 60947-4-1 |
| Breaking capacity | 8 kA Icu at 660/690 V AC 50/60 Hz conforming to IEC 60947-2 25 kA Icu at 500 V AC 50/60 Hz conforming to IEC 60947-2 35 kA Icu at 440 V AC 50/60 Hz conforming to IEC 60947-2 36 kA Icu at 380/415 V AC 50/60 Hz conforming to IEC 60947-2 85 kA Icu at 220/240 V AC 50/60 Hz conforming to IEC 60947-2 |
| [Ics] rated service short-circuit breaking capacity | 100 % at 440 V AC 50/60 Hz conforming to IEC 60947-2 50 % at 500 V AC 50/60 Hz conforming to IEC 60947-2 100 % at 220/240 V AC 50/60 Hz conforming to IEC 60947-2 100 % at 380/415 V AC 50/60 Hz conforming to IEC 60947-2 50 % at 660/690 V AC 50/60 Hz conforming to IEC 60947-2 |
| Trip unit rating | 60...100 A |
| Trip unit technology | Thermal-magnetic |

Complementary

| | |
|---|--|
| Mounting mode | By clips By screws |
| Mounting support | Flush Panel mounting Rail Kit for fixing the switchgear |
| Mounting position | Vertical |
| Motor power kW | 45 kW at 400...415 V AC 50/60 Hz 75 kW at 660...690 V AC 50/60 Hz |
| Control type | Rocker lever |
| System Voltage | 690 V AC 50/60 Hz conforming to IEC 60947-2 |
| [Ui] rated insulation voltage | 750 V AC 50/60 Hz conforming to IEC 60947-2 |
| [Ith] conventional free air thermal current | 100 A conforming to IEC 60947-4-1 |
| [Uimp] rated impulse withstand voltage | 8 kV conforming to IEC 60947-2 |
| Power dissipation | 5 W |
| Power dissipation per pole | 5 W |
| Mechanical durability | 50000 cycles |
| Electrical durability | 30000 cycles AC-3 at 440 V In 50000 cycles AC-3 at 440 V In/2 |
| Operating rate | 25 cyc/h |

The information provided in this documentation contains general descriptions and/or technical characteristics of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

| | |
|---------------------------|---|
| Rated duty | Continuous conforming to IEC 60947-4-1 |
| Connection pitch | 1.38 in (35 mm) without spreaders 1.77 in (45 mm) with spreaders |
| Connections - terminals | Screw Bars Cable with lug - external diameter : 10 mm Bare cable connectors 1.5...95 mm ² |
| Tightening torque | 10 N.m - on screw - screw M6 15 N.m - on bare cable connectors- cable 1.5...95 mm ² |
| Mechanical robustness | Vibrations 2.5 Gn, 0...25 Hz conforming to IEC 60068-2-6 Shocks 15 Gn for 11 ms conforming to IEC 60068-2-27 |
| Suitability for isolation | Yes conforming to IEC 60947-1 |
| Phase failure sensitivity | Yes conforming to IEC 60947-4-1 § 7-2-1-5-2 |
| Height | 4.92 in (125 mm) |
| Width | 4.13 in (105 mm) |
| Depth | 4.37 in (111 mm) |
| Product weight | 4.5 lb(US) (2.04 kg) |

Environment

| | |
|---------------------------------------|---|
| standards | EN/IEC 60947-1 EN/IEC 60947-2 EN/IEC 60947-4-1 NF C 63-120 NF C 63-650 NF C 79-130 VDE 0113 VDE 0660 |
| product certifications | DNV UL |
| protective treatment | TC |
| IP degree of protection | IP405 with terminal shrouds conforming to IEC 60529 |
| pollution degree | 3 |
| ambient air temperature for operation | -13...158 °F (-25...70 °C) |
| ambient air temperature for storage | -67...203 °F (-55...95 °C) |
| fire resistance | 1760 °F (960 °C) conforming to IEC 60695-2-1 |
| operating altitude | 6561.68 ft (2000 m) |

Offer Sustainability

| | |
|--|--|
| Not Green Premium product | Not Green Premium product |
| Will not be Compliant | Will not be Compliant |
| Reference not containing SVHC above the threshold | Reference not containing SVHC above the threshold |
| Available | Available |
| WARNING: This product can expose you to chemicals including: | WARNING: This product can expose you to chemicals including: |
| Antimony oxide & Antimony trioxide, which is known to the State of California to cause cancer. | Antimony oxide & Antimony trioxide, which is known to the State of California to cause cancer. |
| For more information go to www.p65warnings.ca.gov | For more information go to www.p65warnings.ca.gov |

Contractual warranty


| | |
|-----------------|-----------|
| Warranty period | 18 months |
|-----------------|-----------|

Current Limitation on Short-Circuit (3-Phase 400/415 V)

Dynamic Stress

$I_{peak} = f$ (prospective I_{sc})

For GV7RE only

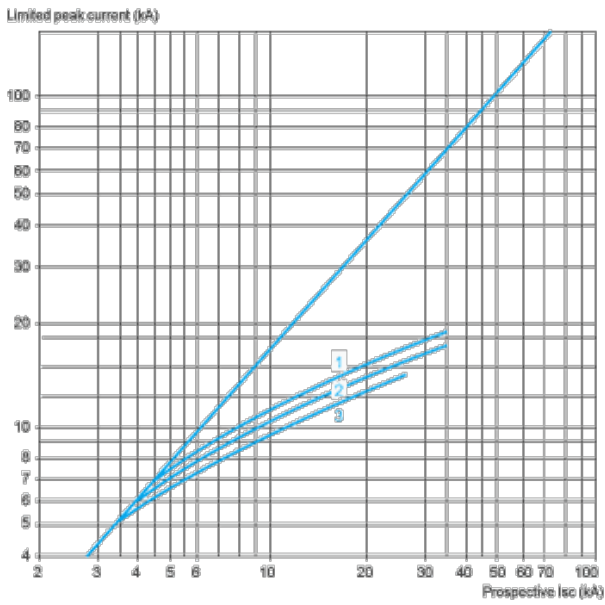


- 1 GV7RE220
- 2 GV7RE150
- 3 GV7RE100

Thermal Limit (3-Phase 400/415 V)

Thermal Limit

Sum of $I^2dt = f$ (prospective Isc)

For GV7RE only

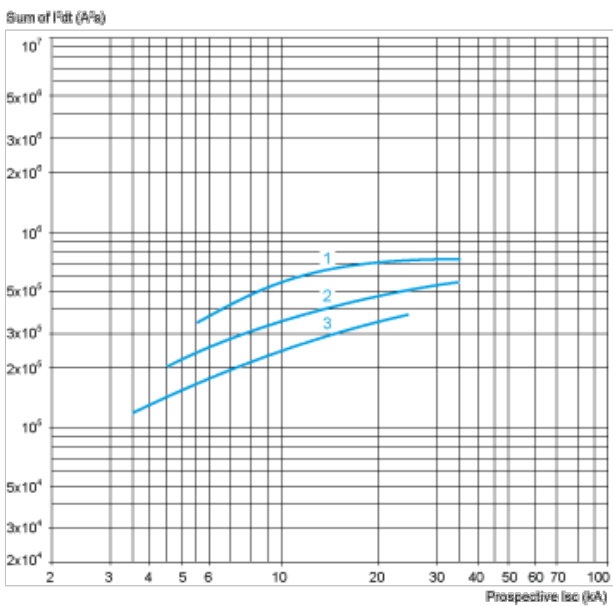


- 1 GV7RE220
- 2 GV7RE150
- 3 GV7RE100

Current Limitation on Short-Circuit (3-Phase 690 V)

Dynamic Stress

$I_{peak} = f$ (prospective Isc)

For GV7RE only

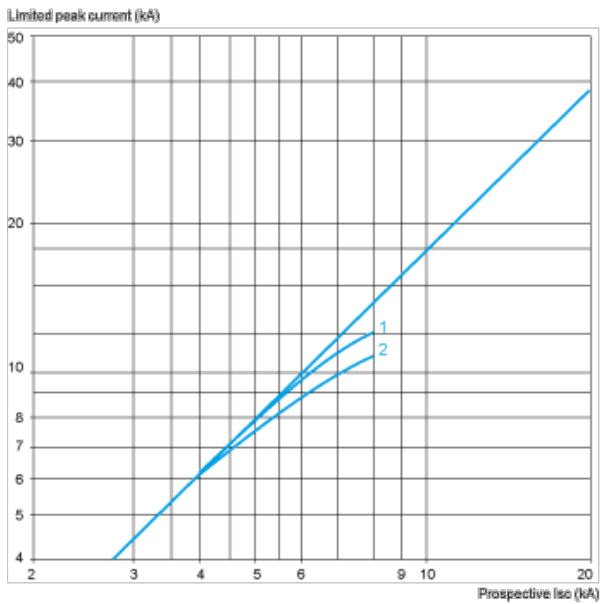


- 1 GV7RE220
- 2 GV7RE150 and GV7RE100

Thermal Limit on Short-Circuit (3-Phase 690 V)

Thermal Limit

Sum of $I^2dt = f$ (prospective Isc)


For GV7RE only

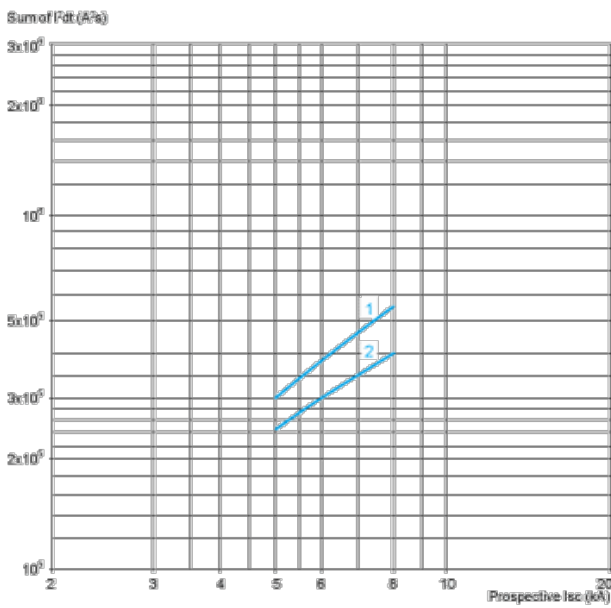

- 1 GV7RE220
- 2 GV7RE150 and GV7RE100


GV7R

Dimensions

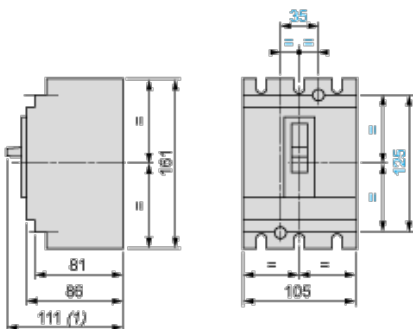

(1) 126 for GV7R_220.


Minimum Electrical Clearance




| | | x1 | x2 |
|---|-------------------------------------|----|----|
| Painted or insulated metal plate, insulation or insulated bar | | 0 | 30 |
| Bare metal plate | $U \leq 440 \text{ V}$ | 5 | 35 |
| | $440 \text{ V} < U < 600 \text{ V}$ | 10 | 35 |
| | $U \geq 600 \text{ V}$ | 20 | 35 |

GV7R


Panel Mounting

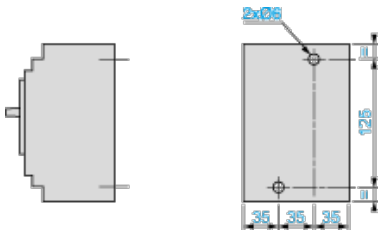


Mounting on 2 Mounting Rails DZ5 MB201

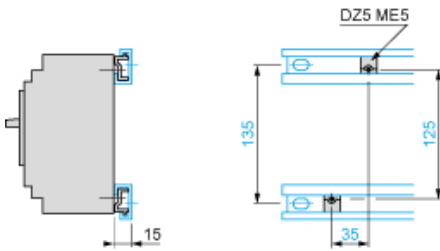


Flush-Mounting

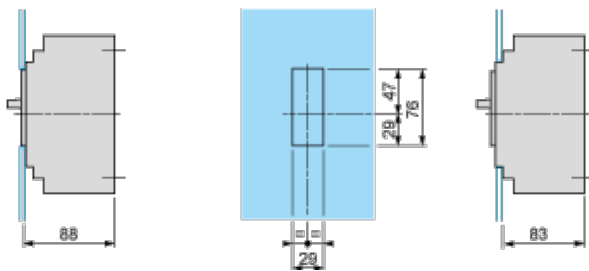


1 circuit breaker GV7R




n circuit breakers GV7R side by side



Connection




Smooth terminals




| | a |
|----------------------------|------|
| GV7R _{40...R} 150 | 19.5 |
| GV7R ₂₂₀ | 21.5 |

Connectors



Motor Circuit Breakers

GV7 R



Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru