

## Power Resistor for Mounting onto a Heatsink Thick Film Technology


**RoHS  
COMPLIANT**
**FEATURES**

- Compliant with requirement #26 of NF-EN45545-2
- High power rating: 500 W
- High overload capability up to 2 times rated power (see energy curve)
- Heatsink mounting
- Low thermal radiation of the case
- Material categorization: for definitions of compliance please see [www.vishay.com/doc?99912](http://www.vishay.com/doc?99912)

**DESIGN SUPPORT TOOLS AVAILABLE**


This range has been developed specifically for electrical traction applications and is capable of dissipating 500 W at +70 °C. The remarkable performance characteristics are evident when used in severe pulse conditions. The copper base allows easy mounting on the heatsink and provides optimal dissipation conditions.

| DIMENSIONS in millimeters |                 |
|---------------------------|-----------------|
| <b>RPS 500D</b>           | <b>RPS 500A</b> |
|                           |                 |

**Note**

- Tolerances unless stated: ± 0.2 mm

| STANDARD ELECTRICAL SPECIFICATIONS |      |                           |  |                                     |                  |                                     |
|------------------------------------|------|---------------------------|--|-------------------------------------|------------------|-------------------------------------|
| MODEL                              | SIZE | RESISTANCE RANGE<br>Ω     | RATED POWER<br>$P_{25\text{ }^\circ\text{C}}$<br>W | LIMITING ELEMENT VOLTAGE $U_L$<br>V | TOLERANCE<br>± % | TEMPERATURE COEFFICIENT<br>± ppm/°C |
| RPS 500                            | 500  | 0.24 to 1M <sup>(1)</sup> | 500  | 5000                                | 1, 2, 5, 10      | 150                                 |

**Note**
<sup>(1)</sup> E24 series

| MECHANICAL SPECIFICATIONS        |  |
|----------------------------------|--|
| Mechanical Protection            | Insulated case and resin for potting UL 94 V-0 |
| Resistive Element                | Cermet   |
| Substrate                        | Alumina onto base of nickel coated copper      |
| End Connections                  | Screws M4 (M5 on request)                      |
| Weight                           | 250 g ± 10 %                                   |
| Tightening Torque on Connections | 2 Nm   |
| Tightening Torque on Heatsink    | 4 Nm   |

| ENVIRONMENTAL SPECIFICATIONS |   |
|------------------------------|---|
| Temperature Range            | -55 °C to +125 °C                                       |
| Flammability                 | IEC 60695-11-5<br>2 applications 30 s separated by 60 s |

| TECHNICAL SPECIFICATIONS   |   |
|--|---|
| Rated Power ( $P_{70}$ )<br>Chassis Mounted at 70 °C<br>(Case Temperature) | 500 W continuous load   |
| Thermal Resistance of the Component  | $R_{th(j-c)}$ : 0.11 °C/W   |
| Temperature Coefficient  | ± 300 ppm/°C < 1 Ω<br>± 150 ppm/°C > 1 Ω  |
| Dielectric Strength  | L: 7 kV <sub>RMS</sub> - H: 12 kV <sub>RMS</sub><br>MIL STD 202 Method 301:<br>1 min/10 mA max. |
| Insulation Resistance  | > 10 <sup>6</sup> MΩ under $U_{ins} = 500 V_{DC}$<br>IEC 60115-1                                |
| Inductance   | < 50 nH   |

| PERFORMANCE              |  |                                 |
|--------------------------|--|---------------------------------|
| TESTS                    | CONDITIONS   | REQUIREMENTS                    |
| Momentary Overload       | EN 60115-1<br>2 Pr / 10 s<br>$U_L = 5000\text{ V}$   | $< \pm (0.25\% + 0.05\ \Omega)$ |
| Rapid Temperature Change | IEC 60115-1 / IEC60068-2-14 Test Na<br>5 cycles, $-55\text{ }^\circ\text{C}$ to $+125\text{ }^\circ\text{C}$ | $< \pm (0.25\% + 0.05\ \Omega)$ |
| Load Life                | IEC 60115-1<br>Pr (i.e. 500 W) / 1000 h / $70\text{ }^\circ\text{C}$ (no cycling) <sup>(1)</sup>             | $< \pm (0.5\% + 0.05\ \Omega)$  |
| Humidity (Steady State)  | MIL STD 202 Method 103 B and D<br>56 days, 95 % RH / $40\text{ }^\circ\text{C}$                              | $< \pm (0.5\% + 0.05\ \Omega)$  |

**Note**

<sup>(1)</sup> Resistors are not tested and guaranteed in cycling conditions

| RESISTANCE VALUE IN RELATION TO TOLERANCE AND TCR                            |                                     |                                     |
|--|-------------------------------------|-------------------------------------|
| Resistance Values  | $< 1\ \Omega$                       | $> 1\ \Omega$                       |
| Standard Tolerances  | $\pm 5\%$                           |                                     |
| Standard TCR ( $-55\text{ }^\circ\text{C}$ to $+125\text{ }^\circ\text{C}$ ) | $\pm 300\text{ ppm}/^\circ\text{C}$ | $\pm 150\text{ ppm}/^\circ\text{C}$ |
| Tolerance on Request   | $\pm 1\%$ , $\pm 2\%$ , $10\%$      |                                     |

**RECOMMENDATIONS FOR MOUNTING ONTO A HEATSINK**

- Surfaces in contact must be carefully cleaned.
- The heatsink must have an acceptable flatness: From 0.05 mm to 0.1 mm/100 mm.
- Roughness of the heatsink must be around 6.3  $\mu\text{m}$ . In order to improve thermal conductivity, surfaces in contact (alumina, heatsink) are coated with a silicone grease (type SI 340 from Rhône-Poulenc or Dow 340 from Dow Corning).
- The fastening of the resistor to the heatsink is under pressure control of two screws tightened at 4 Nm for full power availability.

| Tightening Torque on Heatsink | RPS 500 |
|-------------------------------|---------|
|                               | 4 Nm    |

- The following accessories are supplied with each product: 2 off CHC M4 x 16/16 class 8.8 for heatsink mounting, 2 off TH M4 x 6/6 and 2 M4 contact lock washers for connections.

**CHOICE OF THE HEATSINK**

The user must choose according to the working conditions of the component (power, room temperature).

Maximum working temperature must not exceed  $125\text{ }^\circ\text{C}$ .

The dissipated power is simply calculated by the following ratio:

$$P = \frac{\Delta T}{[R_{th(j-c)}] + [R_{th(c-h)}] + [R_{th(h-a)}]}$$

P: Expressed in W

$\Delta T$ : Difference between maximum working temperature and room temperature

$R_{th(j-c)}$ : Thermal resistance value measured between resistive layer and outer side of the resistor. It is the thermal resistance of the component:  $0.11\text{ }^\circ\text{C}/\text{W}$ .

$R_{th(c-h)}$ : Thermal resistance value measured between outer side of the resistor and upper side of the heatsink. This is the thermal resistance of the interface (grease, thermal pad), and the quality of the fastening device.

$R_{th(h-a)}$ : Thermal resistance of the heatsink.



**OVERLOADS**


Short time overload: 2 Pr/10 s

Accidental overload: The values indicated in the graph below are applicable to resistors in air or mounted onto a heatsink.


**MARKING**

Model, style, resistance value (in Ω), tolerance (in %), manufacturing date, Vishay Sfernice trademark.

**ENERGY CURVE**

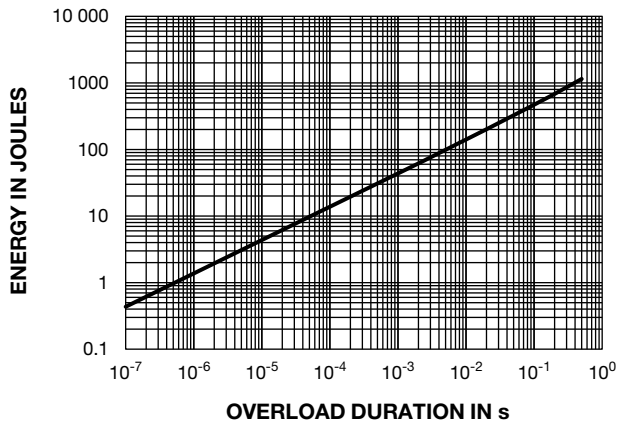


**POWER CURVE**

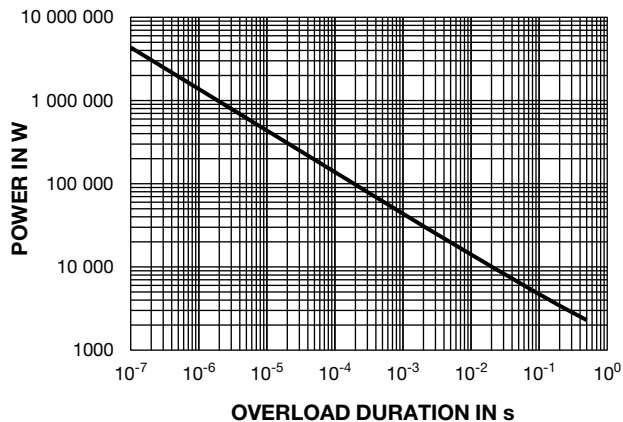

**POWER RATING**

The heatsink temperature should be maintained at the values specified in fig. 2.

To optimize the thermal conduction, contacting surfaces should be coated with silicone grease and heatsink mounting screws tightened to 4 Nm.

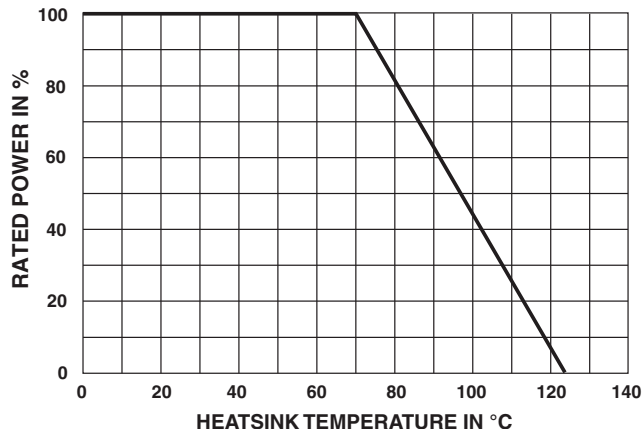

| PACKAGING       |
|-----------------|
| Box of 15 units |



| ORDERING INFORMATION |            |  |                  |  |  |             |                |
|----------------------|------------|--|------------------|--|--|-------------|----------------|
| <b>RPS</b>           | <b>500</b> | <b>DH</b>  | <b>100 kΩ</b>    | <b>± 10 %</b>                                  | <b>xxx</b>   | <b>BO15</b> | <b>e</b>       |
| MODEL                | STYLE      | CONNECTIONS<br>optional<br><b>H</b> : dielectric strength 12 kV<br><b>L</b> : dielectric strength 7 kV | RESISTANCE VALUE | TOLERANCE<br>± 1 %<br>± 2 %<br>± 5 %<br>± 10 % | CUSTOM DESIGN<br>optional<br>on request:<br>special TCR,<br>shape etc. | PACKAGING   | LEAD (Pb)-FREE |

| GLOBAL PART NUMBER INFORMATION |   |   |  |          |          |  |  |          |                               |          |          |          |          |          |  |
|--------------------------------|---|---|--|----------|----------|--|--|----------|-------------------------------|----------|----------|----------|----------|----------|--|
| <b>R</b>                       | <b>P</b>  | <b>S</b>  | <b>0</b>   | <b>5</b> | <b>0</b> | <b>0</b>   | <b>D</b>   | <b>H</b> | <b>4</b>                      | <b>7</b> | <b>R</b> | <b>0</b> | <b>J</b> | <b>B</b> |  |
| GLOBAL MODEL<br><b>RPS500</b>  | STYLE<br><b>D</b> = diagonal connections<br><b>A</b> = straight connections | DIELECTRIC<br><b>H</b> : dielectric strength 12 kV<br><b>L</b> : dielectric strength 7 kV | OHMIC VALUE<br>The first four digits are significant figures and the last digit specifies the number of zeros to follow. R designates decimal point.<br><b>48R70</b> = 48.7 Ω<br><b>47R0</b> = 47 Ω<br><b>1001</b> = 1 kΩ<br><b>4R70</b> = 4.7 Ω<br><b>R240</b> = 0.24 Ω |          |          | TOLERANCE<br><b>F</b> = 1 %<br><b>G</b> = 2 %<br><b>J</b> = 5 %<br><b>K</b> = 10 % | PACKAGING<br><b>B</b> = box 15 pieces<br><b>N</b> = box 15 pieces<br>N/A (1 to 14 pieces by box) |          | SPECIAL<br>As applicable ZAx. |          |          |          |          |          |  |

| RELATED DOCUMENTS   |  |
|---|--|
| APPLICATION NOTES   |  |
| Potentiometers and Trimmers                                       | <a href="http://www.vishay.com/doc?51001">www.vishay.com/doc?51001</a> |
| Guidelines for Vishay Sfernice Resistive and Inductive Components | <a href="http://www.vishay.com/doc?52029">www.vishay.com/doc?52029</a> |



## Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкуренспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)  
Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)