

10A, 200 - 600V Isolated Glass Passivated Super Fast Rectifier

FEATURES

- High efficiency
- High current capability
- High reliability
- High surge current capability
- Low power loss.
- Compliant to RoHS Directive 2011/65/EU and in accordance to WEEE 2002/96/EC
- Halogen-free according to IEC 61249-2-21

KEY PARAMETERS

PARAMETER	VALUE	UNIT
$I_{F(AV)}$	2 x 5	A
V_{RRM}	200 - 600	V
$T_{J\ MAX}$	150	°C
Package	ITO-220AB	
Configuration	Dual Die	


APPLICATIONS

- High frequency rectification
- Freewheeling application
- Switching mode converters and inverters in computer, automotive and telecommunication.




MECHANICAL DATA

- Case: ITO-220AB
- Molding compound meets UL 94V-0 flammability rating
- Packing code with suffix "G" means green compound (halogen-free)
- Part no. with suffix "H" means AEC-Q101 qualified
- Meet JESD 201 class 2 whisker test,
- Polarity: As marked
- Mounting torque: 0.56 N-m maximum
- Weight: 1.7 g (approximately)



ITO-220AB



ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ unless otherwise noted)

PARAMETER		SYMBOL	SFF10L04GA	SFF10L05GA	SFF10L06GA	SFF10L08GA	UNIT
Marking code on the device			SFF10L04GA	SFF10L05GA	SFF10L06GA	SFF10L08GA	
Repetitive peak reverse voltage		V _{RRM}	200	300	400	600	V
Reverse voltage, total rms value		V _{R(RMS)}	140	280	280	420	V
Forward current	Per device	I _{F(AV)}	10				A
	Per diode		5				
Surge peak forward current, 8.3 ms single half sine-wave superimposed on rated load per diode		I _{FSM}	125		80		A
Junction temperature		T _J	- 55 to +150				°C
Storage temperature		T _{STG}	- 55 to +150				°C

THERMAL PERFORMANCE

PARAMETER	SYMBOL	LIMIT	UNIT
Junction-to-lead thermal resistance	$R_{\theta JL}$	2	°C/W
Junction-to-ambient thermal resistance	$R_{\theta JA}$	9	°C/W
Junction-to-case thermal resistance	$R_{\theta JC}$	3	°C/W

Thermal Performance Note: Units mounted on recommended PCB (2"x3"x0.25" Al -plate)

ELECTRICAL SPECIFICATIONS ($T_A = 25^\circ\text{C}$ unless otherwise noted)

PARAMETER		CONDITIONS	SYMBOL	TYP	MAX	UNIT
Forward voltage per diode ⁽¹⁾	SFF10L04GA	I _F = 5A, T _J = 25°C	V _F	0.94	0.98	V
		I _F = 5A, T _J = 125°C		0.82	0.90	V
	SFF10L05GA	I _F = 5A, T _J = 25°C		1.04	1.30	V
		I _F = 5A, T _J = 125°C		0.89	0.96	V
	SFF10L06GA	I _F = 5A, T _J = 25°C		1.05	1.30	V
		I _F = 5A, T _J = 125°C		0.92	1.00	V
	SFF10L08GA	I _F = 5A, T _J = 25°C		1.21	1.70	V
		I _F = 5A, T _J = 125°C		1.04	1.20	V
Reverse current @ rated V _R per diode ⁽²⁾		T _J = 25°C	I _R	-	10	μA
		T _J = 125°C		-	400	μA
Junction capacitance	SFF10L04GA	1 MHz, V _R =4.0V	C _J	60	-	pF
	SFF10L05GA			50	-	pF
	SFF10L06GA					pF
	SFF10L08GA					pF
Reverse recovery time	SFF10L04GA	I _F =0.5A , I _R =1.0A I _{RR} =0.25A	t _{rr}	-	35	ns
	SFF10L05GA					
	SFF10L06GA					
	SFF10L08GA					

Notes:

1. Pulse test with $PW = 0.3\text{ ms}$
2. Pulse test with $PW = 30\text{ ms}$

ORDERING INFORMATION

PART NO.	PART NO. SUFFIX	PACKING CODE	PACKING CODE SUFFIX	PACKAGE	PACKING
SFF10L0xGA (Note 1, 2)	H	C0	G	ITO-220AB	50 / Tube

Notes:

1. "x" defines voltage from 200V (SFF10L04GA) to 600V (SFF10L08GA)
2. Whole series with green compound (halogen-free)

EXAMPLE P/N

EXAMPLE P/N	PART NO.	PART NO. SUFFIX	PACKING CODE	PACKING CODE SUFFIX	DESCRIPTION
SFF10L04GAHC0G	SFF10L04GA	H	C0	G	AEC-Q101 qualified Green compound

CHARACTERISTICS CURVES

($T_A = 25^\circ\text{C}$ unless otherwise noted)

Fig1. Forward Current Derating Curve

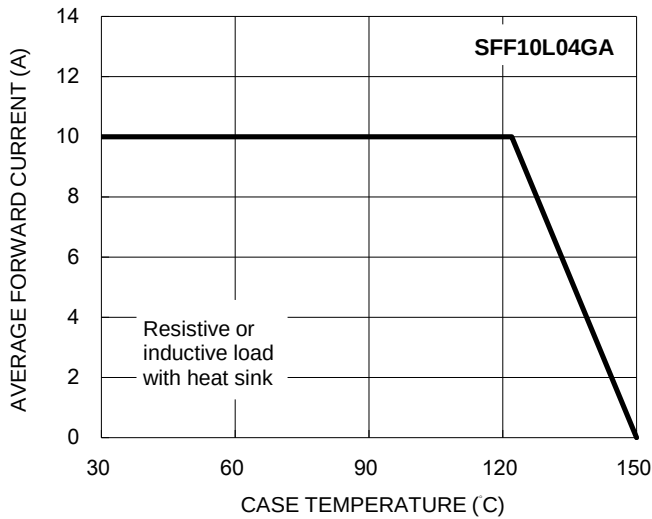


Fig2. Typical Junction Capacitance

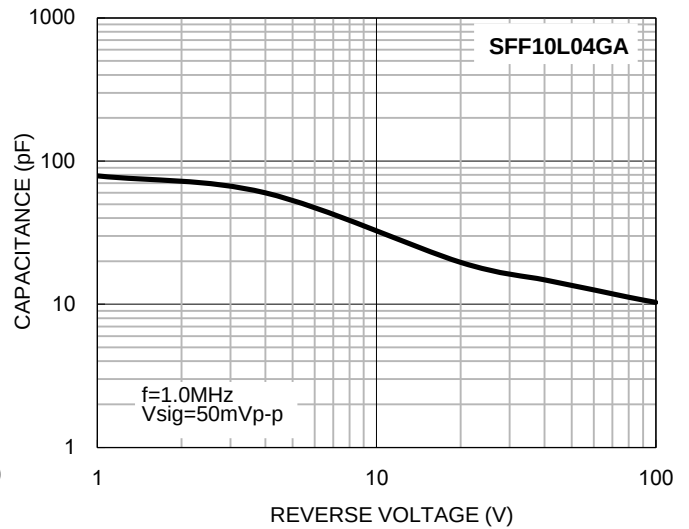


Fig3. Typical Reverse Characteristics


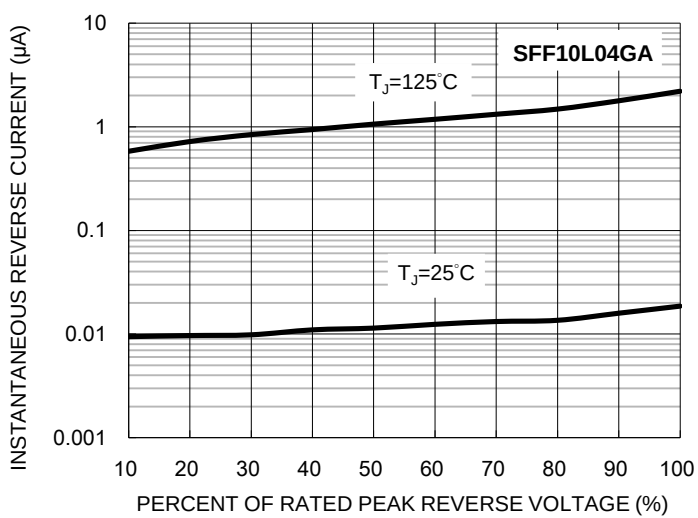


Fig4. Typical Forward Characteristics

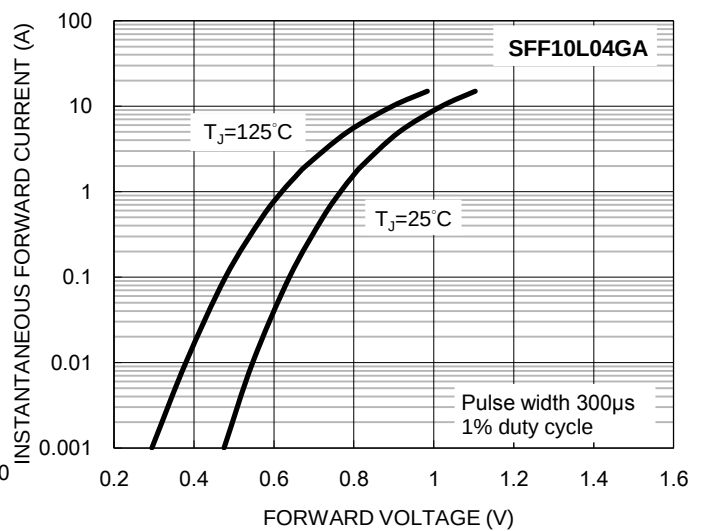

CHARACTERISTICS CURVES

($T_A = 25^\circ\text{C}$ unless otherwise noted)

Fig1. Forward Current Derating Curve

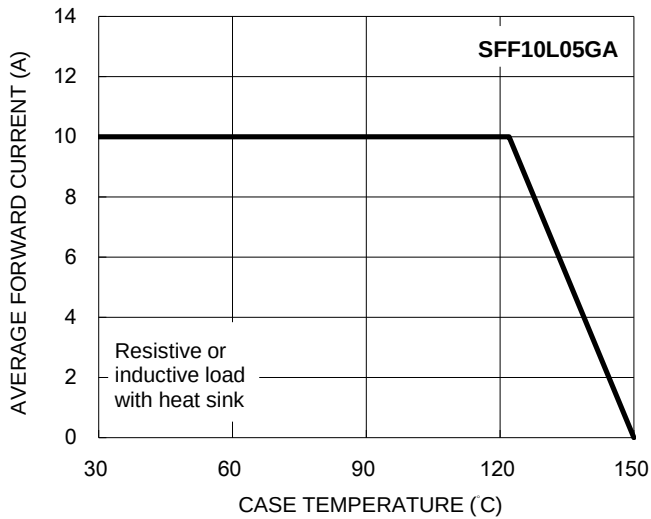


Fig2. Typical Junction Capacitance

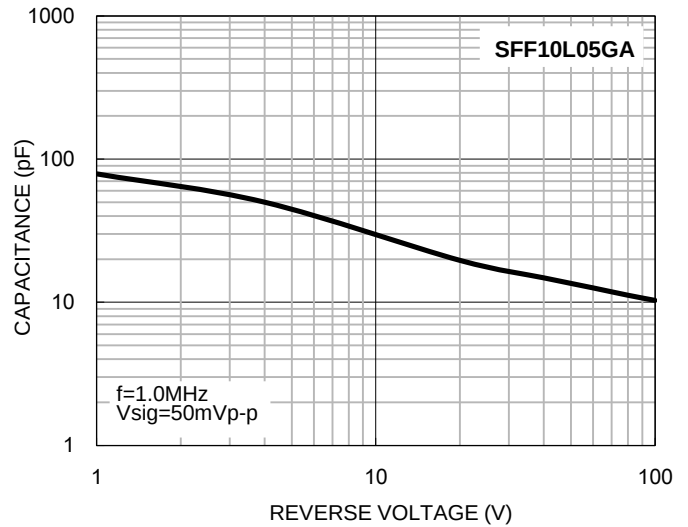


Fig3. Typical Reverse Characteristics


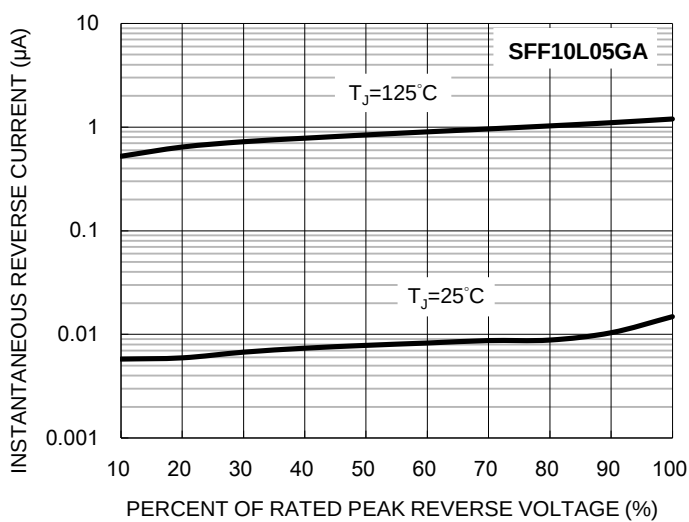


Fig4. Typical Forward Characteristics

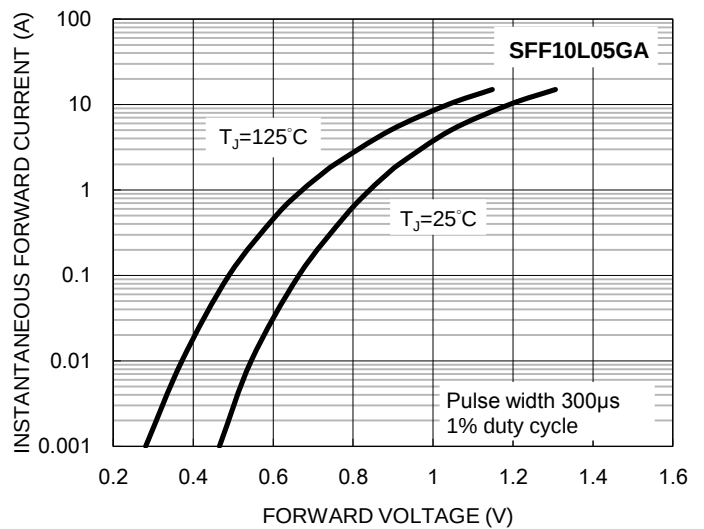

CHARACTERISTICS CURVES

($T_A = 25^\circ\text{C}$ unless otherwise noted)

Fig1. Forward Current Derating Curve

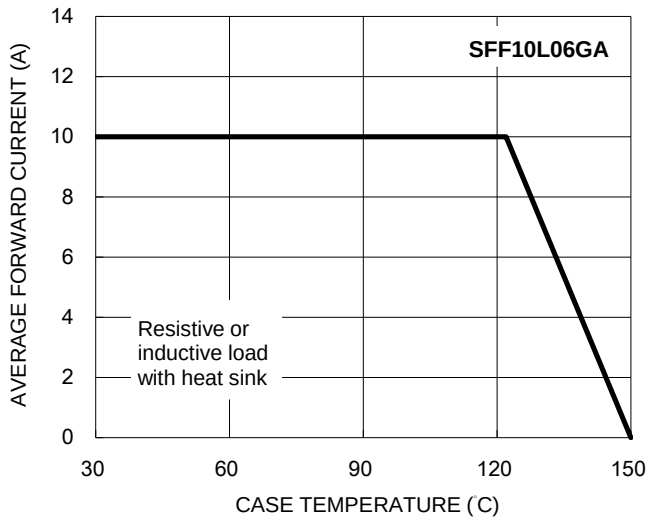


Fig2. Typical Junction Capacitance

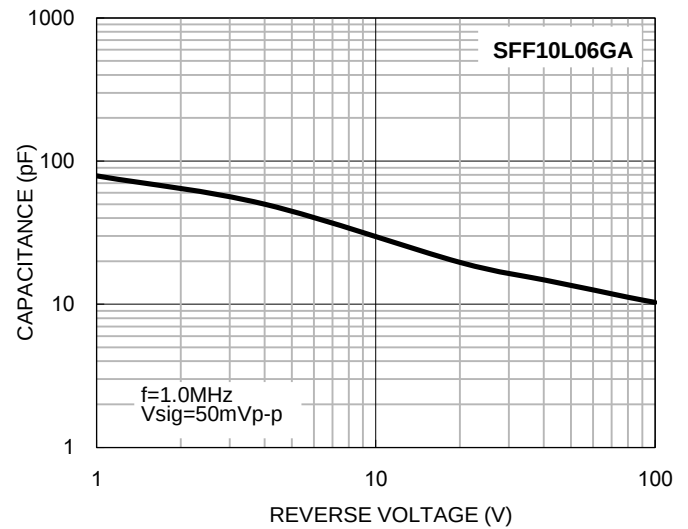


Fig3. Typical Reverse Characteristics


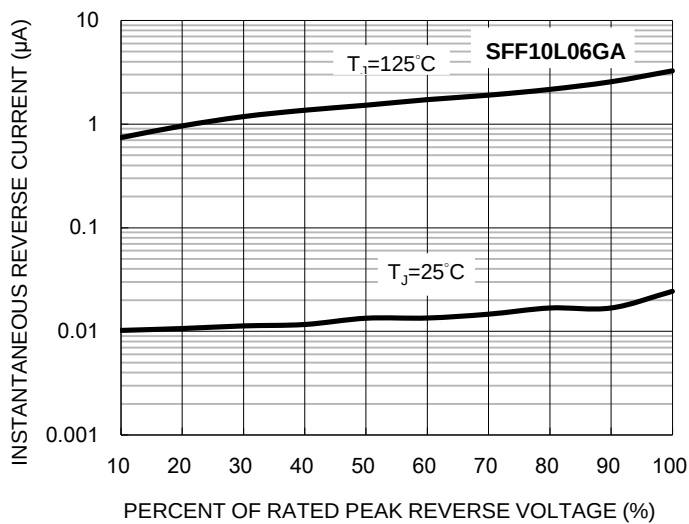


Fig4. Typical Forward Characteristics

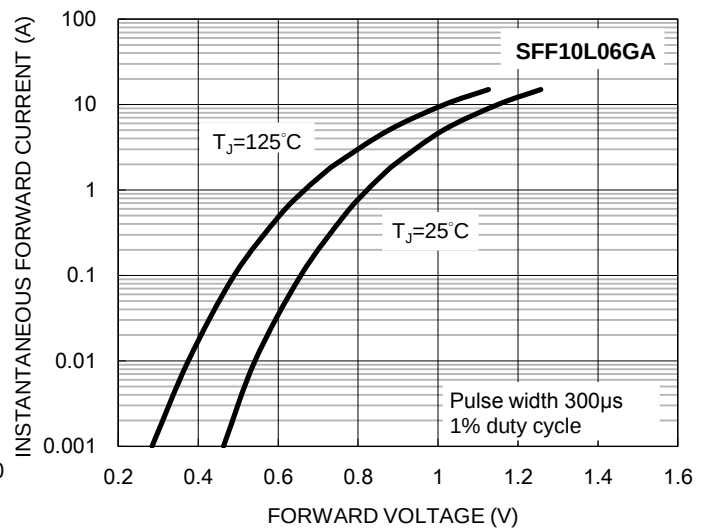

CHARACTERISTICS CURVES

($T_A = 25^\circ\text{C}$ unless otherwise noted)

Fig1. Forward Current Derating Curve

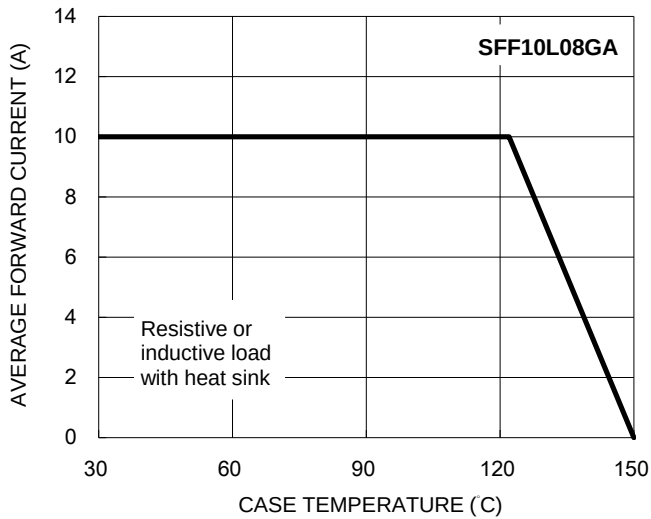


Fig2. Typical Junction Capacitance

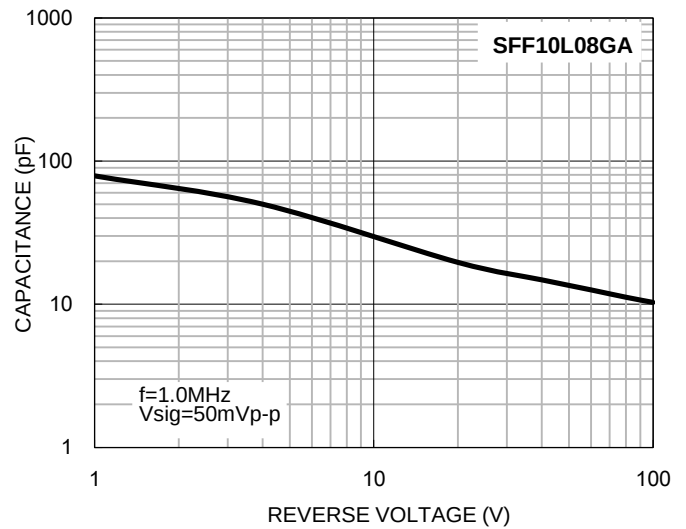


Fig3. Typical Reverse Characteristics



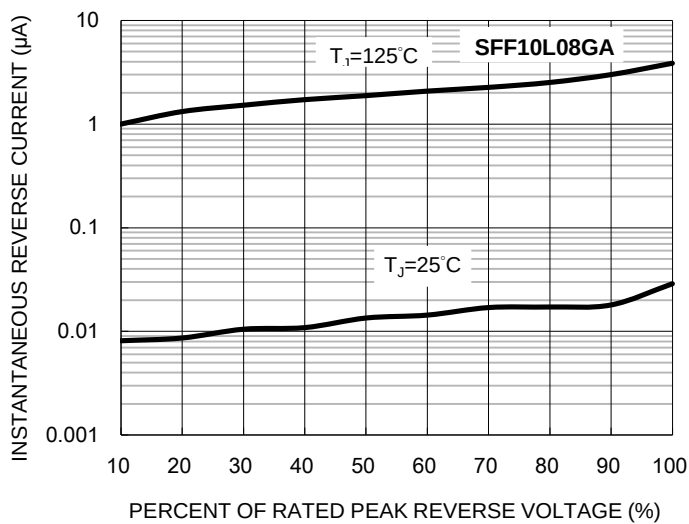


Fig4. Typical Forward Characteristics

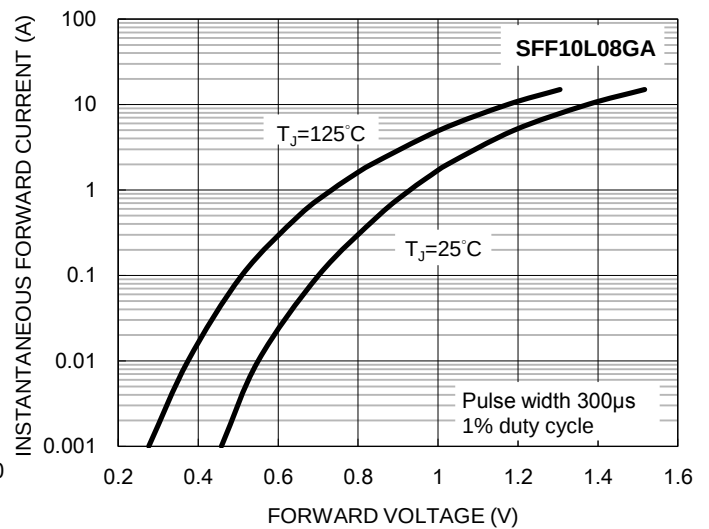


PACKAGE OUTLINE DIMENSIONS

ITO-220AB

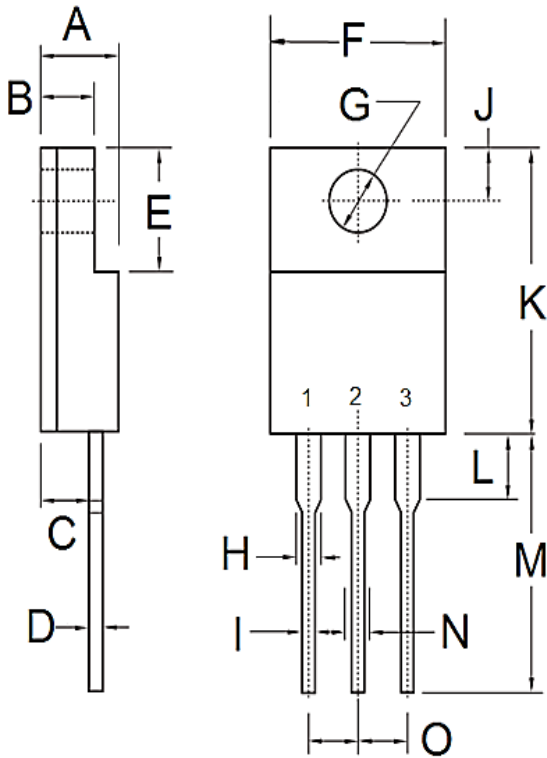

DIM.	Unit (mm)		Unit (inch)	
	Min	Max	Min	Max
A	4.30	4.70	0.169	0.185
B	2.50	3.16	0.098	0.124
C	2.30	2.96	0.091	0.117
D	0.46	0.76	0.018	0.030
E	6.30	6.90	0.248	0.272
F	9.60	10.30	0.378	0.406
G	3.00	3.40	0.118	0.134
H	0.95	1.45	0.037	0.057
I	0.50	0.90	0.020	0.035
J	2.40	3.20	0.094	0.126
K	14.80	15.50	0.583	0.610
L	-	4.10	-	0.161
M	12.60	13.80	0.496	0.543
N	-	1.80	-	0.071
O	2.41	2.67	0.095	0.105

MARKING DIAGRAM



P/N = Marking Code
 G = Green Compound
 YWW = Date Code
 F = Factory Code

Notice

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru