

# NSVF3007SG3

## RF Transistor for Low Noise Amplifier

This RF transistor is designed for low noise amplifier applications. MCPH package is suitable for use under high temperature environment because it has superior heat radiation characteristics. This RF transistor is AEC-Q101 qualified and PPAP capable for automotive applications.

### Features

- Low-noise use :  $NF = 1.2 \text{ dB typ. (} f = 1 \text{ GHz)}$
- High cut-off frequency :  $f_T = 8 \text{ GHz typ. (} V_{CE} = 5 \text{ V)}$
- High gain :  $|S_{21e}|^2 = 12 \text{ dB typ. (} f = 1 \text{ GHz)}$
- AEC-Q101 qualified and PPAP capable
- MCPH3 package is pin-compatible with SC-70FL
- Pb-Free, Halogen Free and RoHS compliance

### Typical Applications

- Low Noise Amplifier for FM Radio
- Low Noise Amplifier for RKE
- RF Amplifier for ADAS

### SPECIFICATIONS

#### ABSOLUTE MAXIMUM RATING at $T_a = 25^\circ\text{C}$ (Note 1)

| Parameter                                  | Symbol         | Value       | Unit             |
|--------------------------------------------|----------------|-------------|------------------|
| Collector to Base Voltage                  | $V_{CBO}$      | 20          | V                |
| Collector to Emitter Voltage               | $V_{CEO}$      | 12          | V                |
| Emitter to Base Voltage                    | $V_{EBO}$      | 2           | V                |
| Collector Current                          | $I_C$          | 30          | mA               |
| Collector Dissipation                      | $P_C$          | 350         | mW               |
| Operating Junction and Storage Temperature | $T_j, T_{stg}$ | -55 to +150 | $^\circ\text{C}$ |

Note 1 : Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.




ON Semiconductor®


www.onsemi.com

12 V, 30 mA  
 $f_T = 8 \text{ GHz typ.}$   
RF Transistor

### ELECTRICAL CONNECTION NPN



### MARKING



MCPH3



### ORDERING INFORMATION

See detailed ordering and shipping information on page 10 of this data sheet.







# NSVF3007SG3

## ELECTRICAL CHARACTERISTICS at Ta = 25°C (Note 2)




| Parameter                | Symbol                          | Conditions                                               | Value |     |     | Unit |
|--------------------------|---------------------------------|----------------------------------------------------------|-------|-----|-----|------|
|                          |                                 |                                                          | min   | typ | max |      |
| Collector Cutoff Current | ICBO                            | V <sub>CB</sub> = 5 V, I <sub>E</sub> = 0 A              |       |     | 1.0 | μA   |
| Emitter Cutoff Current   | IEBO                            | V <sub>EB</sub> = 1 V, I <sub>C</sub> = 0 A              |       |     | 1.0 | μA   |
| DC Current Gain          | hFE                             | V <sub>CE</sub> = 5 V, I <sub>C</sub> = 5 mA             | 60    |     | 150 |      |
| Gain-Bandwidth Product   | f <sub>T</sub>                  | V <sub>CE</sub> = 5 V, I <sub>C</sub> = 10 mA            | 6     | 8   |     | GHz  |
| Forward Transfer Gain    | S <sub>21e</sub>   <sup>2</sup> | V <sub>CE</sub> = 5 V, I <sub>C</sub> = 10 mA, f = 1 GHz | 9     | 12  |     | dB   |
| Noise Figure             | NF                              | V <sub>CE</sub> = 5 V, I <sub>C</sub> = 10 mA, f = 1 GHz |       | 1.2 | 1.8 | dB   |

Note 2 : Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

Note 3 : Pay attention to handling since it is liable to be affected by static electricity due to the high-frequency process adopted.

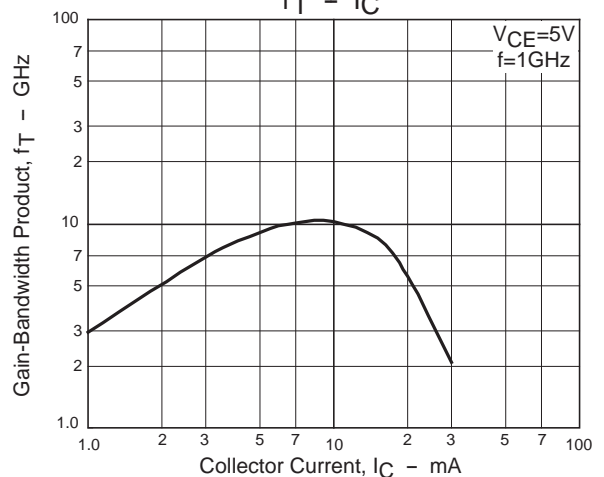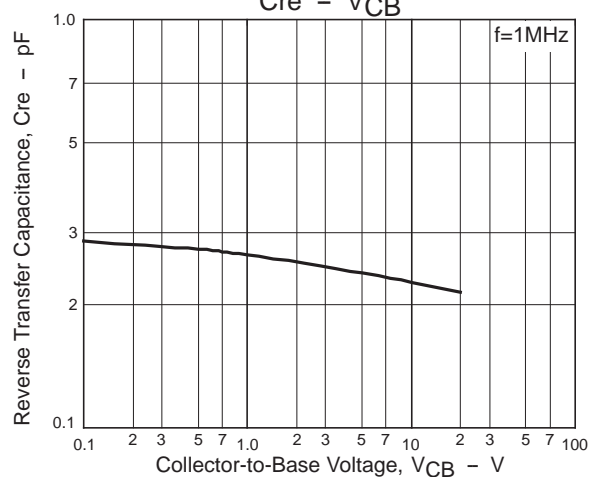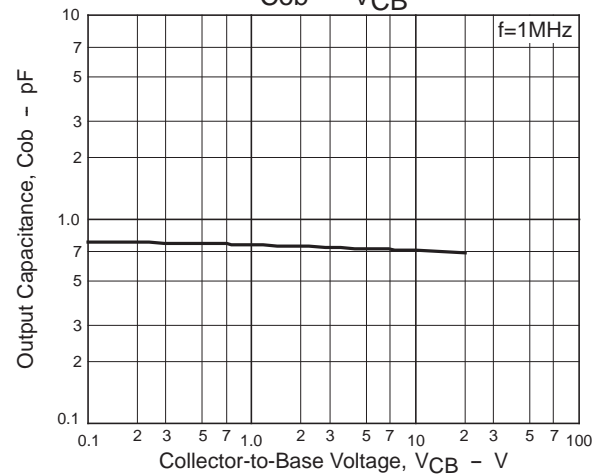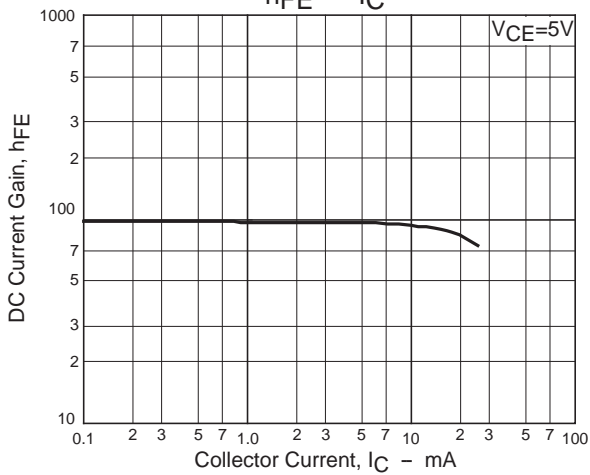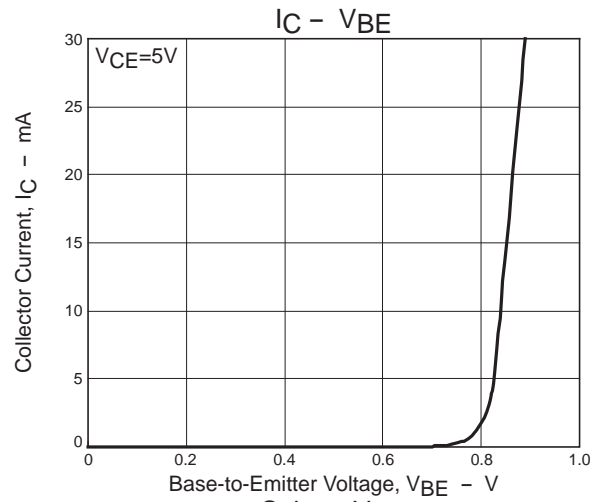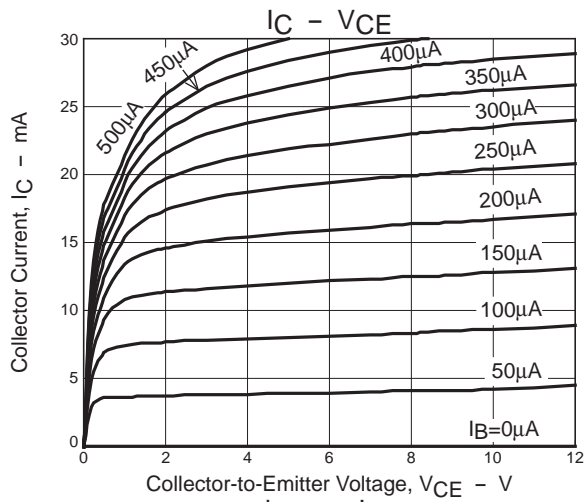

# NSVF3007SG3

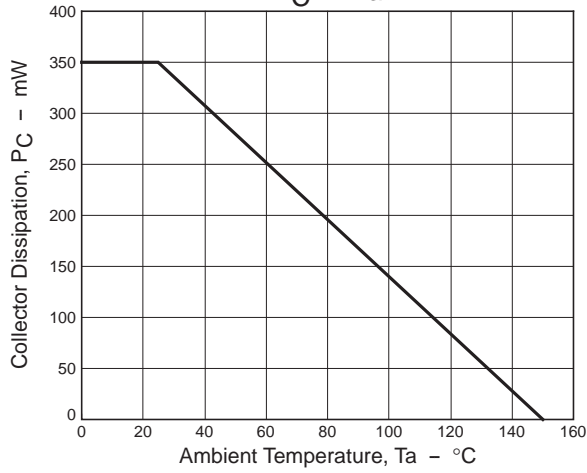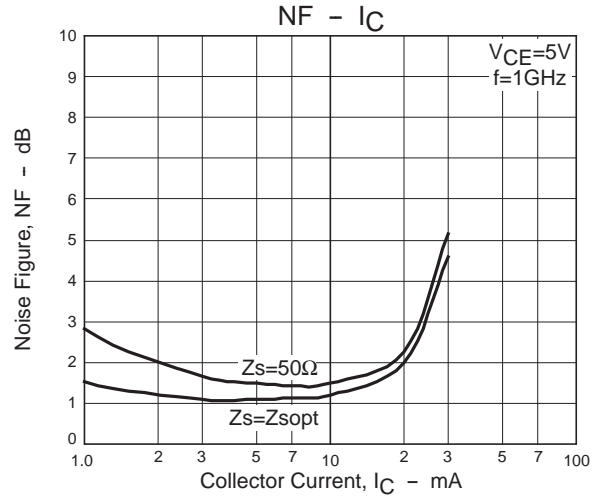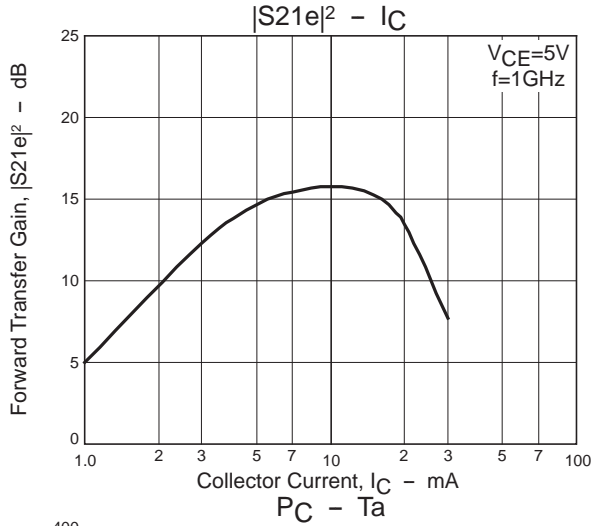

## S Parameters (Common emitter)

$V_{CE}=3V, I_C=5mA, Z_O=50\Omega$

| Freq(MHz) | S11   | $\angle S_{11}$ | S21   | $\angle S_{21}$ | S12   | $\angle S_{12}$ | S22   | $\angle S_{22}$ |
|-----------|-------|-----------------|-------|-----------------|-------|-----------------|-------|-----------------|
| 100       | 0.889 | -11.8           | 9.020 | 164.0           | 0.011 | 87.1            | 0.978 | -9.1            |
| 200       | 0.872 | -18.1           | 8.560 | 151.7           | 0.026 | 81.8            | 0.945 | -17.9           |
| 300       | 0.802 | -32.2           | 8.281 | 142.9           | 0.037 | 77.5            | 0.892 | -25.3           |
| 400       | 0.784 | -37.9           | 7.883 | 136.4           | 0.046 | 74.5            | 0.843 | -32.1           |
| 500       | 0.687 | -55.5           | 7.588 | 125.7           | 0.057 | 71.6            | 0.771 | -39.3           |
| 600       | 0.651 | -64.3           | 7.221 | 119.3           | 0.065 | 70.4            | 0.724 | -43.5           |
| 700       | 0.591 | -76.2           | 6.686 | 111.7           | 0.073 | 69.0            | 0.675 | -48.4           |
| 800       | 0.535 | -85.9           | 6.254 | 105.1           | 0.080 | 68.2            | 0.632 | -52.3           |
| 900       | 0.498 | 266.2           | 5.783 | 100.0           | 0.086 | 67.7            | 0.598 | -55.7           |
| 1000      | 0.450 | 258.0           | 5.404 | 94.8            | 0.093 | 67.9            | 0.562 | -58.4           |
| 1200      | 0.389 | 244.7           | 4.684 | 86.9            | 0.105 | 68.1            | 0.514 | -63.0           |
| 1400      | 0.352 | 234.1           | 4.101 | 80.8            | 0.118 | 68.7            | 0.482 | -66.0           |
| 1600      | 0.322 | 224.9           | 3.651 | 75.6            | 0.131 | 69.4            | 0.463 | -68.3           |
| 1800      | 0.300 | 216.6           | 3.291 | 70.9            | 0.146 | 70.1            | 0.447 | -70.1           |
| 2000      | 0.282 | 208.5           | 3.004 | 66.6            | 0.161 | 70.5            | 0.437 | -71.9           |
| 2200      | 0.266 | 200.9           | 2.776 | 62.6            | 0.177 | 70.7            | 0.435 | -73.7           |
| 2400      | 0.258 | 193.5           | 2.586 | 58.5            | 0.194 | 70.6            | 0.433 | -76.6           |
| 2600      | 0.246 | 186.5           | 2.415 | 55.0            | 0.211 | 70.5            | 0.428 | -78.6           |
| 2800      | 0.243 | 180.9           | 2.292 | 51.7            | 0.231 | 70.4            | 0.435 | -80.0           |
| 3000      | 0.250 | 174.2           | 2.191 | 47.7            | 0.252 | 69.3            | 0.450 | -83.4           |

# NSVF3007SG3

## S Parameters (Common emitter)

V<sub>CE</sub>=3V, I<sub>C</sub>=10mA, Z<sub>O</sub>=50Ω

| Freq(MHz) | S11   | ∠S11  | S21    | ∠S21  | S12   | ∠S12 | S22   | ∠S22  |
|-----------|-------|-------|--------|-------|-------|------|-------|-------|
| 100       | 0.772 | -19.6 | 14.343 | 158.2 | 0.013 | 80.2 | 0.952 | -12.0 |
| 200       | 0.726 | -30.9 | 13.500 | 143.9 | 0.022 | 77.5 | 0.880 | -22.0 |
| 300       | 0.614 | -53.6 | 12.251 | 130.6 | 0.031 | 75.2 | 0.798 | -28.8 |
| 400       | 0.570 | -64.5 | 11.116 | 122.3 | 0.038 | 74.7 | 0.734 | -34.3 |
| 500       | 0.471 | -86.8 | 9.957  | 110.0 | 0.046 | 74.0 | 0.660 | -40.2 |
| 600       | 0.440 | 262.6 | 8.696  | 103.7 | 0.053 | 74.4 | 0.616 | -43.1 |
| 700       | 0.404 | 251.3 | 7.844  | 97.4  | 0.061 | 74.8 | 0.577 | -46.7 |
| 800       | 0.380 | 242.5 | 6.991  | 92.7  | 0.068 | 75.3 | 0.543 | -49.6 |
| 900       | 0.362 | 235.0 | 6.325  | 88.6  | 0.075 | 75.7 | 0.519 | -52.1 |
| 1000      | 0.344 | 228.3 | 5.731  | 85.1  | 0.083 | 76.0 | 0.492 | -54.3 |
| 1200      | 0.321 | 216.8 | 4.838  | 79.0  | 0.098 | 76.7 | 0.461 | -58.0 |
| 1400      | 0.308 | 207.2 | 4.189  | 74.0  | 0.113 | 77.0 | 0.443 | -60.4 |
| 1600      | 0.296 | 199.1 | 3.703  | 69.6  | 0.129 | 77.2 | 0.434 | -62.6 |
| 1800      | 0.287 | 191.6 | 3.324  | 65.5  | 0.146 | 77.2 | 0.428 | -64.4 |
| 2000      | 0.282 | 184.3 | 3.023  | 61.6  | 0.164 | 76.9 | 0.425 | -66.3 |
| 2200      | 0.275 | 177.4 | 2.784  | 57.9  | 0.182 | 76.5 | 0.429 | -68.5 |
| 2400      | 0.274 | 171.5 | 2.591  | 54.2  | 0.201 | 75.7 | 0.432 | -71.7 |
| 2600      | 0.269 | 165.4 | 2.413  | 50.8  | 0.220 | 75.1 | 0.432 | -74.0 |
| 2800      | 0.270 | 160.9 | 2.285  | 47.8  | 0.242 | 74.3 | 0.442 | -75.8 |
| 3000      | 0.281 | 155.9 | 2.182  | 44.0  | 0.266 | 72.7 | 0.460 | -79.7 |

V<sub>CE</sub>=3V, I<sub>C</sub>=15mA, Z<sub>O</sub>=50Ω

| Freq(MHz) | S11   | ∠S11  | S21    | ∠S21  | S12   | ∠S12 | S22   | ∠S22  |
|-----------|-------|-------|--------|-------|-------|------|-------|-------|
| 100       | 0.655 | -30.6 | 16.942 | 153.3 | 0.011 | 76.6 | 0.912 | -13.3 |
| 200       | 0.578 | -51.1 | 14.095 | 136.7 | 0.020 | 73.6 | 0.814 | -22.0 |
| 300       | 0.473 | -82.5 | 12.741 | 120.1 | 0.026 | 73.3 | 0.735 | -26.7 |
| 400       | 0.432 | 260.6 | 11.464 | 110.2 | 0.033 | 74.3 | 0.682 | -30.1 |
| 500       | 0.403 | 240.3 | 9.665  | 100.5 | 0.039 | 75.4 | 0.624 | -34.4 |
| 600       | 0.395 | 230.3 | 7.746  | 94.9  | 0.045 | 77.1 | 0.595 | -36.4 |
| 700       | 0.390 | 220.9 | 6.764  | 89.7  | 0.052 | 79.1 | 0.570 | -39.3 |
| 800       | 0.387 | 213.3 | 5.958  | 85.7  | 0.059 | 80.2 | 0.547 | -41.8 |
| 900       | 0.386 | 207.3 | 5.331  | 81.9  | 0.067 | 81.4 | 0.533 | -44.0 |
| 1000      | 0.381 | 201.6 | 4.798  | 78.8  | 0.074 | 82.1 | 0.515 | -46.2 |
| 1200      | 0.379 | 192.3 | 4.009  | 73.0  | 0.090 | 83.1 | 0.498 | -50.2 |
| 1400      | 0.380 | 184.7 | 3.460  | 68.0  | 0.106 | 83.8 | 0.491 | -53.3 |
| 1600      | 0.378 | 178.1 | 3.047  | 63.5  | 0.124 | 84.1 | 0.491 | -56.3 |
| 1800      | 0.378 | 171.9 | 2.733  | 59.3  | 0.143 | 83.9 | 0.491 | -59.2 |
| 2000      | 0.380 | 165.9 | 2.482  | 55.2  | 0.162 | 83.7 | 0.493 | -62.2 |
| 2200      | 0.379 | 160.0 | 2.282  | 51.4  | 0.183 | 83.0 | 0.502 | -65.4 |
| 2400      | 0.383 | 155.1 | 2.118  | 47.5  | 0.205 | 82.0 | 0.508 | -69.5 |
| 2600      | 0.383 | 149.7 | 1.968  | 44.0  | 0.227 | 81.0 | 0.510 | -72.8 |
| 2800      | 0.386 | 145.4 | 1.860  | 40.8  | 0.253 | 79.8 | 0.523 | -75.6 |
| 3000      | 0.398 | 141.2 | 1.771  | 36.9  | 0.280 | 77.7 | 0.544 | -80.4 |

# NSVF3007SG3

## S Parameters (Common emitter)

$V_{CE}=3V$ ,  $I_C=20mA$ ,  $Z_O=50\Omega$

| Freq(MHz) | S11   | $\angle S11$ | S21    | $\angle S21$ | S12   | $\angle S12$ | S22   | $\angle S22$ |
|-----------|-------|--------------|--------|--------------|-------|--------------|-------|--------------|
| 100       | 0.542 | -48.6        | 17.664 | 147.6        | 0.011 | 72.1         | 0.855 | -13.7        |
| 200       | 0.472 | -85.2        | 13.659 | 127.1        | 0.018 | 65.7         | 0.759 | -19.6        |
| 300       | 0.442 | 241.9        | 10.775 | 110.5        | 0.023 | 68.0         | 0.699 | -22.4        |
| 400       | 0.437 | 225.3        | 8.448  | 101.0        | 0.028 | 72.9         | 0.667 | -24.8        |
| 500       | 0.458 | 210.5        | 6.847  | 92.9         | 0.033 | 76.5         | 0.628 | -28.3        |
| 600       | 0.464 | 203.4        | 5.771  | 87.9         | 0.039 | 80.6         | 0.611 | -30.2        |
| 700       | 0.475 | 196.8        | 4.937  | 83.2         | 0.046 | 82.9         | 0.597 | -33.1        |
| 800       | 0.480 | 191.5        | 4.332  | 79.4         | 0.053 | 84.9         | 0.584 | -35.8        |
| 900       | 0.486 | 187.1        | 3.842  | 75.8         | 0.060 | 86.7         | 0.576 | -38.3        |
| 1000      | 0.487 | 183.0        | 3.458  | 72.6         | 0.068 | 87.8         | 0.565 | -40.9        |
| 1200      | 0.492 | 176.0        | 2.876  | 66.7         | 0.084 | 89.4         | 0.557 | -45.7        |
| 1400      | 0.497 | 170.0        | 2.478  | 61.7         | 0.102 | 90.4         | 0.556 | -49.9        |
| 1600      | 0.500 | 164.4        | 2.179  | 56.9         | 0.121 | 90.6         | 0.561 | -53.9        |
| 1800      | 0.503 | 159.0        | 1.952  | 52.4         | 0.142 | 90.4         | 0.565 | -57.9        |
| 2000      | 0.508 | 153.8        | 1.771  | 48.2         | 0.165 | 89.7         | 0.569 | -61.9        |
| 2200      | 0.510 | 148.4        | 1.625  | 44.3         | 0.189 | 88.6         | 0.579 | -66.1        |
| 2400      | 0.515 | 143.7        | 1.503  | 40.3         | 0.214 | 87.2         | 0.587 | -71.0        |
| 2600      | 0.517 | 138.5        | 1.392  | 36.8         | 0.240 | 85.6         | 0.588 | -75.3        |
| 2800      | 0.520 | 134.0        | 1.311  | 33.8         | 0.270 | 83.8         | 0.600 | -78.9        |
| 3000      | 0.529 | 129.8        | 1.243  | 30.0         | 0.301 | 81.0         | 0.622 | -84.4        |

$V_{CE}=5V$ ,  $I_C=5mA$ ,  $Z_O=50\Omega$

| Freq(MHz) | S11   | $\angle S11$ | S21   | $\angle S21$ | S12   | $\angle S12$ | S22   | $\angle S22$ |
|-----------|-------|--------------|-------|--------------|-------|--------------|-------|--------------|
| 100       | 0.893 | -11.5        | 9.065 | 164.4        | 0.013 | 88.3         | 0.978 | -8.8         |
| 200       | 0.878 | -17.5        | 8.626 | 152.2        | 0.025 | 80.9         | 0.949 | -17.3        |
| 300       | 0.809 | -31.3        | 8.332 | 143.4        | 0.036 | 79.1         | 0.898 | -24.4        |
| 400       | 0.792 | -36.9        | 7.943 | 137.0        | 0.045 | 75.9         | 0.852 | -31.1        |
| 500       | 0.696 | -54.2        | 7.444 | 126.3        | 0.055 | 72.7         | 0.782 | -38.2        |
| 600       | 0.659 | -62.9        | 6.985 | 119.8        | 0.063 | 71.1         | 0.736 | -42.3        |
| 700       | 0.599 | -74.6        | 6.740 | 112.3        | 0.071 | 69.9         | 0.687 | -47.1        |
| 800       | 0.542 | -84.3        | 6.322 | 105.6        | 0.078 | 69.2         | 0.644 | -51.0        |
| 900       | 0.504 | 268.0        | 5.839 | 100.6        | 0.084 | 68.6         | 0.610 | -54.3        |
| 1000      | 0.455 | 259.8        | 5.465 | 95.2         | 0.090 | 68.4         | 0.573 | -57.1        |
| 1200      | 0.392 | 246.7        | 4.739 | 87.3         | 0.103 | 68.8         | 0.526 | -61.6        |
| 1400      | 0.353 | 236.1        | 4.152 | 81.2         | 0.116 | 69.6         | 0.495 | -64.5        |
| 1600      | 0.323 | 227.1        | 3.696 | 75.9         | 0.129 | 70.3         | 0.475 | -66.7        |
| 1800      | 0.299 | 218.7        | 3.332 | 71.2         | 0.143 | 70.8         | 0.460 | -68.5        |
| 2000      | 0.281 | 210.6        | 3.040 | 66.9         | 0.158 | 71.4         | 0.450 | -70.3        |
| 2200      | 0.263 | 203.0        | 2.809 | 62.9         | 0.174 | 71.7         | 0.447 | -72.2        |
| 2400      | 0.255 | 195.6        | 2.618 | 58.8         | 0.191 | 71.6         | 0.446 | -75.1        |
| 2600      | 0.242 | 188.7        | 2.444 | 55.2         | 0.208 | 71.5         | 0.442 | -77.1        |
| 2800      | 0.239 | 183.0        | 2.320 | 51.9         | 0.228 | 71.4         | 0.449 | -78.4        |
| 3000      | 0.246 | 176.1        | 2.218 | 47.9         | 0.250 | 70.3         | 0.464 | -81.9        |

# NSVF3007SG3

## S Parameters (Common emitter)

$V_{CE}=5V$ ,  $I_C=10mA$ ,  $Z_O=50\Omega$

| Freq(MHz) | S11   | $\angle S11$ | S21    | $\angle S21$ | S12   | $\angle S12$ | S22   | $\angle S22$ |
|-----------|-------|--------------|--------|--------------|-------|--------------|-------|--------------|
| 100       | 0.792 | -17.6        | 14.870 | 159.5        | 0.013 | 88.0         | 0.957 | -11.5        |
| 200       | 0.754 | -27.7        | 13.544 | 145.4        | 0.022 | 77.9         | 0.892 | -21.2        |
| 300       | 0.642 | -48.6        | 12.776 | 132.5        | 0.030 | 77.7         | 0.815 | -28.1        |
| 400       | 0.601 | -58.2        | 11.567 | 124.3        | 0.037 | 75.8         | 0.751 | -33.7        |
| 500       | 0.489 | -79.8        | 10.460 | 111.9        | 0.045 | 75.0         | 0.677 | -39.6        |
| 600       | 0.452 | 269.8        | 9.468  | 105.4        | 0.053 | 75.3         | 0.632 | -42.7        |
| 700       | 0.410 | 258.3        | 8.253  | 98.9         | 0.060 | 75.7         | 0.592 | -46.4        |
| 800       | 0.380 | 249.3        | 7.358  | 94.0         | 0.067 | 76.0         | 0.556 | -49.3        |
| 900       | 0.359 | 241.6        | 6.641  | 89.8         | 0.075 | 76.4         | 0.530 | -51.8        |
| 1000      | 0.338 | 234.7        | 6.018  | 86.3         | 0.082 | 76.6         | 0.503 | -54.1        |
| 1200      | 0.310 | 222.9        | 5.069  | 80.2         | 0.097 | 77.1         | 0.470 | -57.7        |
| 1400      | 0.294 | 213.1        | 4.384  | 75.2         | 0.112 | 77.4         | 0.450 | -60.0        |
| 1600      | 0.280 | 204.7        | 3.871  | 70.7         | 0.129 | 77.5         | 0.441 | -62.1        |
| 1800      | 0.270 | 196.8        | 3.472  | 66.6         | 0.145 | 77.4         | 0.433 | -63.8        |
| 2000      | 0.262 | 189.2        | 3.157  | 62.8         | 0.162 | 77.1         | 0.429 | -65.6        |
| 2200      | 0.254 | 182.2        | 2.905  | 59.2         | 0.181 | 76.8         | 0.432 | -67.6        |
| 2400      | 0.253 | 176.0        | 2.700  | 55.5         | 0.199 | 75.9         | 0.435 | -70.7        |
| 2600      | 0.246 | 169.6        | 2.514  | 52.1         | 0.218 | 75.2         | 0.435 | -72.9        |
| 2800      | 0.247 | 165.1        | 2.381  | 49.1         | 0.239 | 74.5         | 0.445 | -74.5        |
| 3000      | 0.258 | 159.8        | 2.273  | 45.3         | 0.263 | 72.9         | 0.462 | -78.3        |

$V_{CE}=5V$ ,  $I_C=15mA$ ,  $Z_O=50\Omega$

| Freq(MHz) | S11   | $\angle S11$ | S21    | $\angle S21$ | S12   | $\angle S12$ | S22   | $\angle S22$ |
|-----------|-------|--------------|--------|--------------|-------|--------------|-------|--------------|
| 100       | 0.691 | -25.3        | 18.098 | 155.5        | 0.011 | 81.7         | 0.936 | -12.7        |
| 200       | 0.628 | -41.7        | 16.001 | 139.7        | 0.020 | 76.6         | 0.847 | -22.0        |
| 300       | 0.505 | -68.7        | 14.151 | 123.7        | 0.027 | 76.2         | 0.766 | -27.6        |
| 400       | 0.452 | -83.3        | 12.511 | 114.0        | 0.033 | 77.5         | 0.706 | -31.7        |
| 500       | 0.394 | 256.4        | 10.390 | 103.8        | 0.040 | 77.5         | 0.640 | -36.6        |
| 600       | 0.376 | 245.9        | 9.124  | 98.0         | 0.047 | 78.9         | 0.604 | -38.8        |
| 700       | 0.360 | 235.9        | 7.856  | 92.7         | 0.054 | 79.7         | 0.573 | -41.9        |
| 800       | 0.350 | 227.5        | 6.939  | 88.5         | 0.062 | 80.6         | 0.545 | -44.5        |
| 900       | 0.342 | 220.8        | 6.231  | 84.9         | 0.069 | 81.0         | 0.526 | -46.7        |
| 1000      | 0.333 | 214.6        | 5.620  | 81.6         | 0.077 | 81.4         | 0.504 | -48.7        |
| 1200      | 0.322 | 204.2        | 4.714  | 76.0         | 0.092 | 82.0         | 0.481 | -52.4        |
| 1400      | 0.318 | 195.8        | 4.071  | 71.3         | 0.109 | 82.3         | 0.469 | -55.0        |
| 1600      | 0.312 | 188.4        | 3.591  | 67.0         | 0.125 | 82.2         | 0.466 | -57.4        |
| 1800      | 0.308 | 181.5        | 3.219  | 62.9         | 0.143 | 82.0         | 0.463 | -59.6        |
| 2000      | 0.307 | 175.0        | 2.925  | 59.1         | 0.162 | 81.6         | 0.463 | -62.0        |
| 2200      | 0.304 | 168.7        | 2.690  | 55.4         | 0.181 | 81.0         | 0.469 | -64.6        |
| 2400      | 0.306 | 163.5        | 2.501  | 51.7         | 0.202 | 80.0         | 0.475 | -68.2        |
| 2600      | 0.302 | 157.8        | 2.327  | 48.3         | 0.222 | 79.1         | 0.477 | -70.9        |
| 2800      | 0.305 | 153.6        | 2.202  | 45.2         | 0.245 | 78.2         | 0.488 | -73.1        |
| 3000      | 0.317 | 149.2        | 2.101  | 41.4         | 0.271 | 76.3         | 0.508 | -77.4        |

# NSVF3007SG3

## S Parameters (Common emitter)

$V_{CE}=5V, I_C=20mA, Z_O=50\Omega$

| Freq(MHz) | S11   | $\angle S11$ | S21    | $\angle S21$ | S12   | $\angle S12$ | S22   | $\angle S22$ |
|-----------|-------|--------------|--------|--------------|-------|--------------|-------|--------------|
| 100       | 0.591 | -37.1        | 19.539 | 151.2        | 0.010 | 86.0         | 0.904 | -12.7        |
| 200       | 0.508 | -64.2        | 15.394 | 132.6        | 0.017 | 73.2         | 0.808 | -20.0        |
| 300       | 0.425 | 264.1        | 13.138 | 115.7        | 0.023 | 75.0         | 0.740 | -23.8        |
| 400       | 0.396 | 246.9        | 10.561 | 106.1        | 0.028 | 77.4         | 0.696 | -26.6        |
| 500       | 0.393 | 228.4        | 8.791  | 97.4         | 0.034 | 79.7         | 0.648 | -30.4        |
| 600       | 0.393 | 219.4        | 7.452  | 92.2         | 0.041 | 81.8         | 0.625 | -32.3        |
| 700       | 0.398 | 211.1        | 6.426  | 87.4         | 0.047 | 83.9         | 0.605 | -35.1        |
| 800       | 0.400 | 204.4        | 5.644  | 83.5         | 0.054 | 85.1         | 0.586 | -37.6        |
| 900       | 0.403 | 199.0        | 5.020  | 79.9         | 0.062 | 86.4         | 0.574 | -39.9        |
| 1000      | 0.402 | 194.0        | 4.518  | 76.8         | 0.069 | 87.1         | 0.559 | -42.2        |
| 1200      | 0.404 | 185.7        | 3.761  | 71.1         | 0.085 | 88.2         | 0.546 | -46.5        |
| 1400      | 0.408 | 178.9        | 3.240  | 66.2         | 0.102 | 88.9         | 0.541 | -49.9        |
| 1600      | 0.409 | 172.7        | 2.850  | 61.6         | 0.120 | 89.1         | 0.544 | -53.4        |
| 1800      | 0.410 | 166.9        | 2.552  | 57.4         | 0.140 | 88.9         | 0.545 | -56.7        |
| 2000      | 0.414 | 161.3        | 2.316  | 53.3         | 0.161 | 88.2         | 0.548 | -60.1        |
| 2200      | 0.415 | 155.6        | 2.127  | 49.5         | 0.183 | 87.4         | 0.557 | -63.7        |
| 2400      | 0.419 | 150.9        | 1.971  | 45.6         | 0.207 | 86.2         | 0.565 | -68.1        |
| 2600      | 0.420 | 145.6        | 1.830  | 42.1         | 0.230 | 84.9         | 0.567 | -71.8        |
| 2800      | 0.424 | 141.3        | 1.728  | 38.9         | 0.258 | 83.5         | 0.580 | -74.8        |
| 3000      | 0.435 | 137.2        | 1.644  | 35.0         | 0.287 | 81.0         | 0.602 | -79.9        |

$V_{CE}=8V, I_C=5mA, Z_O=50\Omega$

| Freq(MHz) | S11   | $\angle S11$ | S21   | $\angle S21$ | S12   | $\angle S12$ | S22   | $\angle S22$ |
|-----------|-------|--------------|-------|--------------|-------|--------------|-------|--------------|
| 100       | 0.898 | -11.4        | 9.031 | 164.6        | 0.014 | 81.3         | 0.979 | -8.5         |
| 200       | 0.883 | -17.3        | 8.611 | 152.5        | 0.023 | 80.9         | 0.951 | -16.8        |
| 300       | 0.815 | -31.0        | 8.301 | 143.8        | 0.034 | 78.7         | 0.903 | -23.6        |
| 400       | 0.798 | -36.5        | 7.927 | 137.3        | 0.044 | 76.2         | 0.858 | -30.2        |
| 500       | 0.702 | -53.6        | 7.625 | 126.6        | 0.054 | 72.7         | 0.790 | -37.1        |
| 600       | 0.665 | -62.3        | 6.978 | 120.2        | 0.062 | 71.9         | 0.744 | -41.1        |
| 700       | 0.605 | -73.7        | 6.732 | 112.7        | 0.069 | 70.5         | 0.697 | -45.8        |
| 800       | 0.547 | -83.4        | 6.322 | 106.0        | 0.076 | 69.6         | 0.654 | -49.6        |
| 900       | 0.510 | 269.0        | 5.840 | 100.9        | 0.082 | 69.3         | 0.620 | -52.9        |
| 1000      | 0.460 | 260.8        | 5.471 | 95.5         | 0.089 | 69.3         | 0.584 | -55.5        |
| 1200      | 0.396 | 247.8        | 4.746 | 87.5         | 0.101 | 69.6         | 0.537 | -60.0        |
| 1400      | 0.356 | 237.3        | 4.159 | 81.4         | 0.113 | 70.3         | 0.507 | -62.8        |
| 1600      | 0.325 | 228.3        | 3.705 | 76.0         | 0.127 | 71.1         | 0.488 | -65.1        |
| 1800      | 0.301 | 219.9        | 3.339 | 71.3         | 0.141 | 71.8         | 0.473 | -66.8        |
| 2000      | 0.282 | 211.8        | 3.046 | 67.0         | 0.156 | 72.3         | 0.463 | -68.7        |
| 2200      | 0.264 | 204.3        | 2.814 | 62.9         | 0.172 | 72.7         | 0.461 | -70.6        |
| 2400      | 0.256 | 196.9        | 2.622 | 58.8         | 0.188 | 72.7         | 0.460 | -73.5        |
| 2600      | 0.243 | 189.9        | 2.448 | 55.2         | 0.206 | 72.7         | 0.457 | -75.5        |
| 2800      | 0.239 | 184.2        | 2.323 | 51.9         | 0.226 | 72.6         | 0.464 | -76.9        |
| 3000      | 0.246 | 177.3        | 2.222 | 47.9         | 0.248 | 71.4         | 0.480 | -80.5        |

# NSVF3007SG3

## S Parameters (Common emitter)

V<sub>CE</sub>=8V, I<sub>C</sub>=10mA, Z<sub>O</sub>=50Ω

| Freq(MHz) | S11   | ∠S11  | S21    | ∠S21  | S12   | ∠S12 | S22   | ∠S22  |
|-----------|-------|-------|--------|-------|-------|------|-------|-------|
| 100       | 0.804 | -16.7 | 15.064 | 160.0 | 0.010 | 91.9 | 0.962 | -10.7 |
| 200       | 0.769 | -26.5 | 14.343 | 146.1 | 0.021 | 79.2 | 0.899 | -20.5 |
| 300       | 0.657 | -46.8 | 12.917 | 133.2 | 0.030 | 77.6 | 0.825 | -27.2 |
| 400       | 0.617 | -55.8 | 11.712 | 125.2 | 0.037 | 76.1 | 0.762 | -32.7 |
| 500       | 0.500 | -77.3 | 10.577 | 112.7 | 0.044 | 75.4 | 0.689 | -38.6 |
| 600       | 0.461 | -87.5 | 9.195  | 106.1 | 0.052 | 75.9 | 0.645 | -41.6 |
| 700       | 0.416 | 260.9 | 8.345  | 99.5  | 0.059 | 76.1 | 0.605 | -45.2 |
| 800       | 0.385 | 251.9 | 7.445  | 94.5  | 0.066 | 76.6 | 0.569 | -48.2 |
| 900       | 0.363 | 244.1 | 6.716  | 90.3  | 0.073 | 77.0 | 0.543 | -50.6 |
| 1000      | 0.340 | 237.2 | 6.084  | 86.7  | 0.080 | 77.1 | 0.516 | -52.8 |
| 1200      | 0.310 | 225.3 | 5.122  | 80.6  | 0.095 | 77.7 | 0.482 | -56.5 |
| 1400      | 0.293 | 215.4 | 4.430  | 75.5  | 0.111 | 78.0 | 0.462 | -58.8 |
| 1600      | 0.278 | 206.9 | 3.909  | 71.1  | 0.126 | 78.2 | 0.453 | -60.8 |
| 1800      | 0.267 | 198.9 | 3.505  | 66.9  | 0.143 | 78.1 | 0.445 | -62.5 |
| 2000      | 0.259 | 191.3 | 3.187  | 63.1  | 0.160 | 77.9 | 0.441 | -64.4 |
| 2200      | 0.250 | 184.2 | 2.932  | 59.4  | 0.178 | 77.5 | 0.445 | -66.4 |
| 2400      | 0.248 | 177.9 | 2.724  | 55.7  | 0.197 | 76.8 | 0.447 | -69.5 |
| 2600      | 0.241 | 171.4 | 2.536  | 52.4  | 0.215 | 76.1 | 0.448 | -71.7 |
| 2800      | 0.242 | 166.8 | 2.402  | 49.3  | 0.237 | 75.4 | 0.458 | -73.3 |
| 3000      | 0.253 | 161.3 | 2.293  | 45.6  | 0.260 | 73.9 | 0.476 | -77.1 |

V<sub>CE</sub>=8V, I<sub>C</sub>=15mA, Z<sub>O</sub>=50Ω

| Freq(MHz) | S11   | ∠S11  | S21    | ∠S21  | S12   | ∠S12 | S22   | ∠S22  |
|-----------|-------|-------|--------|-------|-------|------|-------|-------|
| 100       | 0.714 | -23.1 | 18.714 | 156.7 | 0.012 | 82.8 | 0.944 | -12.2 |
| 200       | 0.657 | -37.9 | 16.515 | 141.0 | 0.019 | 77.5 | 0.861 | -21.6 |
| 300       | 0.531 | -62.8 | 14.794 | 125.3 | 0.026 | 76.8 | 0.780 | -27.3 |
| 400       | 0.473 | -75.9 | 12.583 | 115.8 | 0.033 | 77.8 | 0.720 | -31.6 |
| 500       | 0.401 | 264.1 | 10.957 | 105.3 | 0.040 | 78.3 | 0.652 | -36.6 |
| 600       | 0.377 | 253.6 | 9.432  | 99.4  | 0.047 | 79.4 | 0.614 | -39.0 |
| 700       | 0.356 | 243.3 | 8.297  | 94.0  | 0.054 | 80.2 | 0.582 | -42.1 |
| 800       | 0.341 | 234.5 | 7.333  | 89.7  | 0.062 | 80.8 | 0.552 | -44.8 |
| 900       | 0.331 | 227.5 | 6.576  | 86.0  | 0.069 | 81.2 | 0.531 | -47.0 |
| 1000      | 0.319 | 221.1 | 5.934  | 82.8  | 0.076 | 81.5 | 0.508 | -49.0 |
| 1200      | 0.305 | 210.1 | 4.973  | 77.2  | 0.092 | 81.9 | 0.483 | -52.6 |
| 1400      | 0.298 | 201.2 | 4.291  | 72.5  | 0.108 | 82.1 | 0.469 | -55.0 |
| 1600      | 0.290 | 193.5 | 3.781  | 68.2  | 0.125 | 82.1 | 0.465 | -57.3 |
| 1800      | 0.285 | 186.3 | 3.387  | 64.2  | 0.142 | 81.8 | 0.461 | -59.3 |
| 2000      | 0.282 | 179.4 | 3.078  | 60.4  | 0.160 | 81.4 | 0.460 | -61.5 |
| 2200      | 0.278 | 172.9 | 2.829  | 56.8  | 0.179 | 80.7 | 0.466 | -63.9 |
| 2400      | 0.279 | 167.4 | 2.628  | 53.1  | 0.199 | 79.8 | 0.471 | -67.3 |
| 2600      | 0.275 | 161.5 | 2.445  | 49.8  | 0.219 | 79.0 | 0.472 | -69.9 |
| 2800      | 0.277 | 157.3 | 2.313  | 46.8  | 0.242 | 78.1 | 0.484 | -71.8 |
| 3000      | 0.289 | 152.7 | 2.208  | 43.0  | 0.267 | 76.2 | 0.504 | -76.0 |



# NSVF3007SG3

## S Parameters (Common emitter)

V<sub>CE</sub>=8V, I<sub>C</sub>=20mA, Z<sub>O</sub>=50Ω

| Freq(MHz) | S11   | ∠S11  | S21    | ∠S21  | S12   | ∠S12 | S22   | ∠S22  |
|-----------|-------|-------|--------|-------|-------|------|-------|-------|
| 100       | 0.625 | -31.7 | 20.496 | 153.2 | 0.010 | 85.3 | 0.924 | -12.4 |
| 200       | 0.547 | -54.4 | 16.242 | 135.3 | 0.018 | 74.6 | 0.832 | -20.6 |
| 300       | 0.441 | -82.8 | 14.433 | 118.7 | 0.023 | 75.1 | 0.757 | -25.0 |
| 400       | 0.396 | 261.2 | 11.734 | 109.0 | 0.029 | 78.6 | 0.708 | -28.2 |
| 500       | 0.371 | 241.9 | 9.955  | 100.1 | 0.035 | 80.3 | 0.652 | -32.3 |
| 600       | 0.363 | 232.1 | 8.478  | 94.7  | 0.042 | 82.4 | 0.623 | -34.3 |
| 700       | 0.360 | 222.8 | 7.373  | 89.9  | 0.049 | 83.6 | 0.599 | -37.1 |
| 800       | 0.357 | 215.2 | 6.487  | 85.9  | 0.056 | 84.8 | 0.576 | -39.6 |
| 900       | 0.356 | 209.3 | 5.797  | 82.4  | 0.064 | 85.5 | 0.561 | -41.8 |
| 1000      | 0.352 | 203.5 | 5.218  | 79.3  | 0.071 | 86.0 | 0.543 | -44.0 |
| 1200      | 0.350 | 194.2 | 4.357  | 73.7  | 0.087 | 86.8 | 0.525 | -47.9 |
| 1400      | 0.350 | 186.7 | 3.757  | 69.0  | 0.103 | 87.1 | 0.518 | -50.9 |
| 1600      | 0.349 | 180.0 | 3.309  | 64.6  | 0.121 | 87.1 | 0.518 | -53.9 |
| 1800      | 0.348 | 173.7 | 2.964  | 60.5  | 0.140 | 86.8 | 0.517 | -56.6 |
| 2000      | 0.350 | 167.7 | 2.691  | 56.6  | 0.159 | 86.3 | 0.519 | -59.6 |
| 2200      | 0.349 | 161.7 | 2.472  | 52.9  | 0.180 | 85.5 | 0.527 | -62.7 |
| 2400      | 0.352 | 156.9 | 2.295  | 49.1  | 0.202 | 84.4 | 0.534 | -66.7 |
| 2600      | 0.351 | 151.4 | 2.132  | 45.7  | 0.224 | 83.2 | 0.536 | -69.9 |
| 2800      | 0.354 | 147.2 | 2.016  | 42.6  | 0.250 | 82.1 | 0.549 | -72.5 |
| 3000      | 0.367 | 143.1 | 1.922  | 38.7  | 0.277 | 79.9 | 0.570 | -77.2 |



Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкуренспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)