

TECHNICAL DATA

Ti480 PRO and Ti450 PRO Infrared Cameras

The Fluke Professional Series



Fluke Connect® compatible

The Fluke PRO series cameras introduce a leading-edge visual infrared experience. Smartest, most intuitive user interface. Increased thermal sensitivity to capture the smallest differences. Latest technology for on-screen clarity. Lens compatibility to capture targets tiny-to-large.

- Increased sensitivity to visualize temperature differences, NETD for the Ti450 PRO is $\leq 0.025\text{ }^{\circ}\text{C}$ at $30\text{ }^{\circ}\text{C}$ target temp (25 mK)
- Easier to visualize and diagnose issues with sharper on-screen images, multiple rectangle markers and 9 color palettes
- More intuitive visual interface, improved, user-tested, touch screen interface
- More flexibility to visualize targets—tiny to large with interchangeable smart lenses—no calibration required, 2x and 4x telephoto, wide angle and macro lenses are compatible with Ti480 PRO and Ti450 PRO
- Capture a clear, accurate image focused throughout the field of view with MultiSharp™ Focus.
- Get an instant in-focus image of your designated target. LaserSharp® Auto Focus uses a built-in laser distance meter that calculates and displays the distance from your designated target
- Get 4x the pixel data with SuperResolution, which captures multiple images and combines them to create a 1280 x 960 image (Ti480 PRO) or a 640 x 480 image (Ti450 PRO)
- Reduce the need to take notes in the field with two helpful features; IR-PhotoNotes™ and voice annotations
- Highlight areas that are outside your pre-set 'normal' temperature ranges quickly with color alarms
- Save time—wirelessly sync images directly from your camera to the Fluke Connect® system, and attach to an asset record or work order. Make faster decisions by accessing inspection measurements from anywhere. Team members can instantly see the same data, at the inspection site and the office.

SUPERIOR IMAGE QUALITY

SPATIAL RESOLUTION

Ti480 PRO 0.93 mRad

Ti450 PRO 1.31 mRad

RESOLUTION

Ti480 PRO 640 x 480

SuperResolution mode: 1280 x 960


Ti450 PRO 320 x 240

SuperResolution mode: 640 x 480

FIELD OF VIEW

Ti480 PRO 34 °H x 24 °V

Ti450 PRO 24 °H x 17 °V

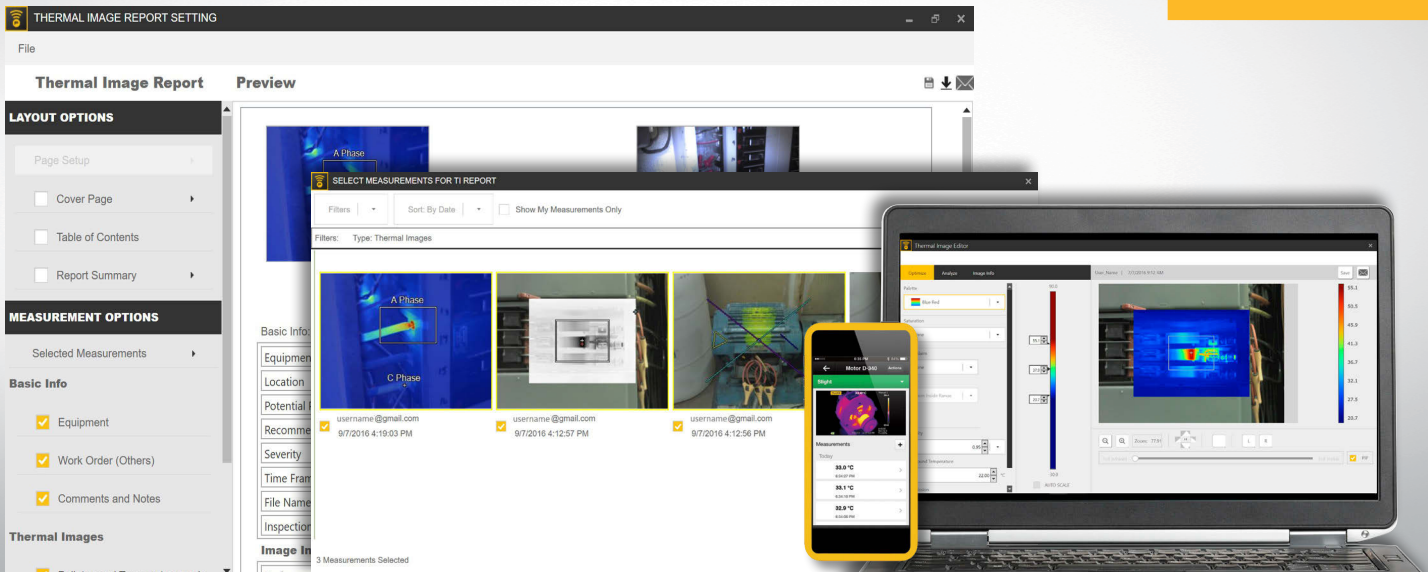

Powerful, easy-to-use Fluke Connect®

A comprehensive and connected platform that represents the future of integrated equipment maintenance, monitoring, analysis and reporting. It's easier than ever to optimize thermal images, perform analytics, generate quick, customizable, robust reports, and export images to the format of your choice in the cloud. And you will be able to integrate with Fluke Connect—the largest integrated system of maintenance software and tools in the world.

- Modern visual design
- Intuitive navigation—easier to learn, easier and faster to work in
- Simplified work flows
- Simplified reporting workflow and better report templates
- Fluke Connect Cloud storage

100 % Focused—Every object. Near and far. MultiSharp™ Focus.



Manual focus



MultiSharp Focus, available on the Ti450 PRO

Detailed specifications


| | Ti480 PRO | Ti450 PRO |
|--|--|---|
| Key features | | |
| Detector resolution | 640 x 480 (307,200) or 1280 x 960 with SuperResolution | 320 x 240 (76,800 pixels) or 640 x 480 with SuperResolution |
| SuperResolution | Yes, in software. Captures and combines 4x the data to create a 1280 x 960 image | Yes, in software. Captures and combines 4x the data to create a 640 x 480 image |
| IFOV with standard lens (spatial resolution) | 0.93 mRad, D:S 1065:1 | 1.31 mRad, D:S 753:1 |
| Field of view | 34 °H x 24 °V | 24 °H x 17 °V |
| Minimum focus distance | 15 cm (approx. 6 in) | |
| MultiSharp™ Focus | Yes, focused near and far, throughout the field of view | |
| LaserSharp® Auto Focus | Yes, for consistently in-focus images. Every. Single. Time. | |
| Laser distance meter | Yes, calculates distance to the target for precisely focused images and displays distance on screen | |
| Advanced manual focus | Yes | |
| Wireless connectivity | Yes, to PC, iPhone® and iPad® (iOS 4s and later), Android™ 4.3 and up, and WiFi to LAN (where available) | |
| Fluke Connect® app compatible | Yes*, connect your camera to your smartphone, and images taken automatically upload to the Fluke Connect app for saving and sharing | |
| Fluke Connect® Assets optional software | Yes*, assign images to assets and create work orders. Easily compare measurement types in one location. | |
| Fluke Connect® Instant Upload | Yes*, connect your camera to your building's WiFi network, and images taken automatically upload to the Fluke Connect system for viewing on your smartphone or PC | |
| Fluke Connect® tool compatible | Yes*, connects wirelessly to select Fluke Connect enabled tools and displays measurements on camera screen. | |
| IR-Fusion® technology | Yes, adds the context of the visible details to your infrared image | |
| AutoBlend™ mode | Min, Mid, Max IR plus full visible on camera; continuously variable in software | |
| Picture-In-Picture (PIP) | Yes | |
| Ruggedized touchscreen display | 3.5 inch (landscape) 640 x 480 LCD | |
| Rugged, ergonomic design for one-handed use | Yes | |
| Thermal sensitivity (NETD)** | ≤ 0.05 °C at 30 °C target temp (50 mK) | ≤ 0.025 °C at 30 °C target temp (25 mK) |
| Level and span | Smooth auto and manual scaling | |
| Fast auto toggle between manual and auto modes | Yes | |
| Fast auto-rescale in manual mode | Yes | |
| Minimum span (in manual mode) | 2.0 °C (3.6 °F) | |
| Minimum span (in auto mode) | 3.0 °C (5.4 °F) | |
| Built-in digital camera (visible light) | 5MP | |
| Frame rate | 60 Hz or 9 Hz versions | |
| Laser pointer | Yes | |
| LED light (torch) | Yes, improved output torch | |
| Digital zoom | 2x and 4x | |
| Data storage and image capture | | |
| Extensive memory options | Removable 4 GB micro SD memory card, 4 GB internal flash memory, save to USB flash drive capability, upload to for permanent storage | |
| Image capture, review, save mechanism | One-handed image capture, review, and save capability | |
| Image file formats | Non-radiometric (.bmp) or (.jpeg) or fully-radiometric (.is2); no analysis software required for non-radiometric (.bmp, .jpg and .avi) files | |
| Memory review | Thumbnail and full screen review | |
| Software | SmartView® software—full analysis and reporting software | |
| Export file formats with Fluke Connect® desktop software | Bitmap (.bmp), GIF, JPEG, PNG, TIFF | |
| Voice annotation | 60 seconds maximum recording time per image; reviewable playback on camera, optional bluetooth headset available but not required | |
| IR-PhotoNotes™ | Yes (5 images) | |
| Text annotation | Yes | |
| Video recording | Standard and radiometric | |
| File formats video | Non-radiometric (MPEG - encoded .AVI) and fully-radiometric (.IS3) | |
| Remote display viewing | Yes, see the live stream of the camera display on your PC, smartphone, or TV monitor. Via USB, WiFi hotspot, or WiFi network to SmartView® software on a PC; via WiFi hotspot to the Fluke Connect® app on a smartphone; or via HDMI to a TV monitor | |
| Remote control operation | Yes, through SmartView® software or Fluke Connect® mobile app | |
| Auto capture (temperature and interval) | Yes | |
| Battery | | |
| Batteries (field-replaceable, rechargeable) | Two lithium ion smart battery packs with five-segment LED display to show charge level | |
| Battery life | 2-3 hours per battery (*Actual life varies depending on settings and usage) | 3-4 hours per battery (*Actual life varies depending on settings and usage) |
| Battery charge time | 2.5 hours to full charge | |
| Battery charging system | Two-bay battery charger or in-imager charging. Optional 12 V automotive charging adapter | |
| AC operation | AC operation with included power supply (100 V AC to 240 V AC, 50/60 Hz) | |
| Power saving | User selectable sleep and power off modes | |

*Fluke Connect analysis and reporting software is available in all countries but Fluke Connect is not. Please check availability with your authorized Fluke distributor.
 ** Best possible

Detailed specifications

| | Ti480 PRO | Ti450 PRO |
|---|---|--------------------------------------|
| Temperature measurement | | |
| Temperature measurement range (not calibrated below -10 °C) | ≤ -10 °C to +1000 °C (-14 °F to 1832 °F) | -10 °C to 1500 °C (14 °F to 2732 °F) |
| Accuracy | ± 2 °C or 2% (at 25 °C nominal, whichever is greater) | |
| On-screen emissivity correction | Yes (both value and table) | |
| On-screen reflected background temperature compensation | Yes | |
| On-screen transmission correction | Yes | |
| Live line marker | Yes | |
| Color palettes | | |
| Standard palettes | 9: Rainbow, Ironbow, Blue-Red, High Contrast, Amber, Amber Inverted, Hot Metal, Grayscale, Grayscale Inverted | |
| Ultra Contrast™ palettes | 9: Rainbow, Ironbow, Blue-Red, High Contrast, Amber, Amber Inverted, Hot Metal, Grayscale, Grayscale Inverted | |
| Lens compatibility | | |
| Macro-25 micron lens: 25 MAC2 | Yes | |
| 2 x telephoto lens: TELE 2 | Yes | |
| 4 x telephoto lens: TELE4 | Yes | |
| Wide angle lens: WIDE 2 | Yes | |
| General specifications | | |
| Color alarms (temperature alarms) | High temperature, low temperature, and isotherms (within range) | |
| Infrared spectral band | 7.5 μm to 14 μm (long wave) | |
| Operating temperature | -10 °C to +50 °C (14 °F to 122 °F) | |
| Storage temperature | -20 °C to +50 °C (-4 °F to 122 °F) without batteries | |
| Relative humidity | 10 % to 95% non-condensing | |
| Center-point temperature measurement | Yes | |
| Spot temperature | Hot and cold spot markers | |
| User-definable spot markers | 3 user-definable spot markers | |
| Center box | Up to 3 expandable-contractible measurement box with MIN-MAX-AVG temp display | |
| Safety | IEC 61010-1: Overvoltage category II, Pollution Degree 2 | |
| Electromagnetic compatibility | IEC 61326-1: Basic EM environment. CISPR 11: Group 1, Class A | |
| Australian RCM | IEC 61326-1 | |
| US FCC | CFR 47, Part 15 Subpart C Sections 15.207, 15.209, 15.249 | |
| Vibration | 0.03 g2/Hz (3.8 g), 2.5 g IEC 68-2-6 | |
| Shock | 25 g, IEC 68-2-29 | |
| Drop | Engineered to withstand 2 meter (6.5 feet) drop with standard lens | |
| Size (H x W x L) | 27.7 cm x 12.2 cm x 16.7 cm (10.9 in x 4.8 in x 6.5 in) | |
| Weight (battery included) | 1.04 kg (2.3 lb) | |
| Enclosure rating | IEC 60529: IP54 (protected against dust, limited ingress; protection against water spray from all directions) | |
| Warranty | Two-years (standard), extended warranties are available | |
| Recommended calibration cycle | Two-years (assumes normal operation and normal aging) | |
| Supported languages | Czech, Dutch, English, Finnish, French, German, Hungarian, Italian, Japanese, Korean, Polish, Portuguese, Russian, Simplified Chinese, Spanish, Swedish, Traditional Chinese, and Turkish | |
| RoHS compliant | Yes | |





Ordering information

- FLK-Ti480 PRO 60 Hz Infrared Camera
- FLK-Ti480 PRO 9 Hz Infrared Camera
- FLK-Ti450 PRO 60 Hz Infrared Camera
- FLK-Ti450 PRO 9 Hz Infrared Camera

Included

Infrared camera with standard infrared lens; AC power supply and battery pack charger (including universal AC adapters); two rugged lithium ion smart battery packs; USB cable; HDMI video cable; 4 GB micro SD card; rugged, hard carrying case; soft transport bag and adjustable hand strap.
Available by free download: Fluke Connect® desktop software* and user manual.

Optional accessories

- FLK-LENS/TELE2 Infrared Telephoto Lens (2X magnification)
- FLK-LENS/4XTELE2 Infrared Telephoto Lens (4X magnification)
- FLK-LENS/WIDE2 Infrared Wide Angle Lens
- FLK-LENS/MACRO2 Infrared Macro Lens (close-up 0.5 times)
- TI-CAR-CHARGER Car Charger
- FLK-TI-VISOR3 Sun Visor
- BOOK-ITP Introduction to Thermography Principles Book
- TI-TRIPOD3 Tripod Mounting Accessory
- FLK-TI-BLUE TOOTH Bluetooth headset
- FLK-TI-SBP3 Additional Smart Battery
- FLK-TI-SBC3B Additional Smart Battery Charger

***Only available in certain countries.**

The Expert Series


Go expert with the Fluke TiX580, TiX560, TiX520 or TiX500, and get up to 640 x 480 resolution along with maximum flexibility of a screen that rotates a full 240 degrees and a 5.7 inch touchscreen LCD. Includes in-field analysis and post-capture image processing on camera, along with other expert-level features and more lens options.



Preventive maintenance simplified. Rework eliminated.

Save time and improve the reliability of your maintenance data by wirelessly syncing measurements using the Fluke Connect® system.

- Eliminate data-entry errors by saving measurements directly from the tool and associating them with the work order, report or asset record.
- Maximize uptime and make confident maintenance decisions with data you can trust and trace.
- Move away from clipboards, notebooks and multiple spreadsheets with a wireless one-step measurement transfer.
- Access baseline, historical and current measurements by asset.
- Share your measurement data using ShareLive™ video calls and emails.
- The Ti450 PRO and Ti480 PRO infrared cameras are part of a growing system of connected test tools and equipment maintenance software. Visit the website to learn more about the Fluke Connect® system.

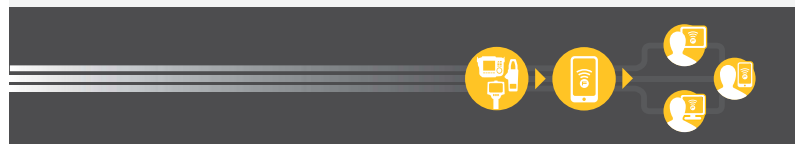

All trademarks are the property of their respective owners. WiFi or cellular service required to share data. Smartphone, wireless service and data plan not included with purchase. First 5 GB of storage is free.

Smart phone wireless service and data plan not included with purchase. Fluke Connect is not available in all countries.

Fluke. Keeping your world up and running.®

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Fluke:

[FLK-TI450PRO60HZ](#) [FLK-TI480PRO60HZ](#)

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкуренспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru