


SPECIFICATIONS:	
STEPS PER REVOLUTION: 200	ROTOR INERTIA: 300 G-CM ² (1.64 OZ-IN ²)NOM
STEP ANGLE: 1.8°	HOLDING TORQUE: 9.0 KG-CM (125 OZ-IN)MIN ¹
STEP TO STEP ACCURACY: ± 5 % ¹ , ²	DETENT TORQUE: 500 G-CM (6.94 OZ-IN)MIN
POSITIONAL ACCURACY: ± 5 % ¹ , ³	
HYSTERESIS: %	INSULATION CLASS: B
WINDING RESISTANCE: 7.2 OHM ±10% AT 25° ⁷	BEARINGS: ABEC 3 , DOUBLE SHIELDED
WINDING INDUCTANCE: 11 mH ± 20% ⁸	WEIGHT: 0.7 KG (1.54 LB)
PHASE VOLTAGE: 7.2 VDC	TEMP. RISE: 80 °C MAX. ⁹
PHASE CURRENT: 1.0 AMP [(RATED) UNIPOLAR]	OPERATING TEMP. RANGE: -20 TO +50 °C
	STORAGE TEMP. RANGE: -40 TO 70 °C
SHAFT RUNOUT: 0.05 T.I.R.	RELATIVE HUMIDITY RANGE: 5 TO 95 %
RADIAL PLAY: 0.025 MAX W/A .5KG RADIAL LOAD.	
END PLAY: 0.075 MAX W/A 1KG AXIAL LOAD.	

NOTES, UNLESS OTHERWISE SPECIFIED:

- ¹ MEASUREMENTS MADE AT RATED CURRENT IN EACH PHASE.
- ² BETWEEN ANY TWO ADJACENT STEP POSITIONS.
- ³ MAXIMUM ERROR IN 360°.
4. HIPOT 500 VAC, 60 Hz FOR ONE MINUTE.
- ⁵ LEADS: 8 ,AWG 22,7 STRAND MIN.,UL AND CSA APPROVED, UL 3265.
6. INSULATION RESISTANCE: 100 MEGOHMS MIN AT 500 VDC.
- ⁷ AS MEASURED ACROSS ANY WINDING. RESISTANCE IS DOUBLED WITH BOTH WINDINGS IN SERIES.
- ⁸ AS MEASURED ACROSS ANY WINDING USING AN A.C. INDUCTANCE BRIDGE, AT 1KHz. INDUCTANCE IS FOUR TIMES VALUE WITH WINDINGS IN SERIES.
- ⁹ AS MEASURED BY THE CHANGE IN RESISTANCE METHOD, WITH RATED VOLTAGE APPLIED TO 2 PHASES; WITH MOTOR AT REST.
10. HIGH TORQUE MOTOR DESIGN, MICROSTEP LAMINATION.
11. ROTOR & STATOR LAMINATION MATERIAL: 0.5mm thk, SEE AMP STD SPEC #1500-062.
- ¹² SHAFT OPTION: IF DOUBLE SHAFT REQUIRED ADD "D" TO END OF PART NUMBER.
DOUBLE SHAFT REQUIRES ADDED HOLES FOR ENCODER OPTIONS.
13. THIS MOTOR TO BE MANUFACTURED IN COMPLIANCE WITH EU DIRECTIVE "ROHS 2002/95/EC".
- ¹⁴ MOTOR LABEL TO INCLUDE "ROHS" COMPLIANT, 'MADE IN (COUNTRY OF ORIGIN)' AND DATE CODE.

SWITCHING SEQUENCE FOR CW ROTATION
FACING MOUNTING END


STEP	ORANGE	BLACK	RED	YELLOW
0	+	-	+	-
1	-	+	+	-
2	-	+	-	+
3	+	-	-	+
4	+	-	+	-

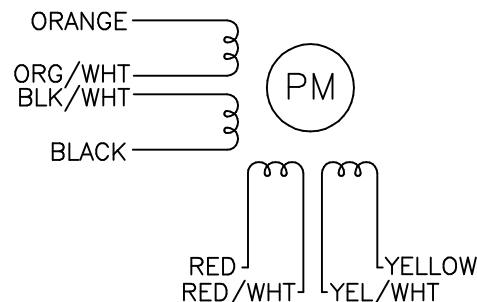

HT23-396

REVISIONS				
ECO NO.	REV	DESCRIPTION	DATE	APPROVED
3987	A	INITIAL RELEASE	8/13/96	<i>K. Kordik</i>
5006	B	ADD "23HT54D" DBL SFT REQD		
5235	C	ADD EU COMPLIANCE NOTES	8/25/05	<i>R. Hazelwood</i>
6006	D	ADD ENV DRAWING/ ENC HOLES	10/20/09	J KORDIK
6082	E	ADD #4 HOLES	3/3/10	J KORDIK

LABEL DETAIL



CONTRACT NO. CAT TS3653N2E4		APPLIED MOTION PRODUCTS, INC.		
APPROVALS	DATE	STEP MOTOR OUTLINE		
DRAWN <i>R. BARRICK</i>	8/13/96			
CHECKED				
APPROVED				
APPROVED		B	COMPUTER DATA BASE DRAWING	DWG NO. HT23-396 REV E
SCALE: 1=1		SHEET 1 OF 2		

MOTOR DRAWING

The drawing consists of three views: a front view (left), a side view (middle), and a top view (right). The front view shows a square motor housing with a central circular feature and four mounting holes. The side view shows the motor's profile with a central winding area and a label. The top view shows the motor's footprint with dimensions for the mounting holes and the central feature. Callouts 12, 13, and 14 are used to identify specific features across the views.

Front View (Left):

- Top dimension: 5-10
- Left dimension: 457 MIN
- Top right corner: 4X R4.6
- Center hole: 2X #4-40 UNC TAP THRU EQ SP ON A $\phi 19.05$ B.C.
- Bottom center hole: #4-40 UNC TAP THRU
- Bottom dimension: 21.50
- Bottom right dimension: 5.8 ± 0.15
- Callout 12 points to the top right corner, the center hole, the bottom center hole, and the bottom right dimension.

Side View (Middle):

- Top dimension: 54 ± 1
- Top left dimension: 15 ± 0.25
- Top right dimension: 5.0
- Top right dimension: 1.6 ± 0.2
- Center dimension: 15 ± 0.25
- Bottom left dimension: 16 ± 1
- Bottom right dimension: 20 ± 0.5
- Center feature: LABEL
- Bottom center hole: 2X #2-56 UNC TAP THRU EQ.SP. ON A $\phi 32.5$ B.C.
- Callout 12 points to the top left dimension, the center feature, and the bottom center hole.
- Callout 13 points to the top right dimension.
- Callout 14 points to the bottom right dimension.

Top View (Right):

- Top dimension: 4X $\phi 5.2 \pm 0.25$
- Top right dimension: 2X 23.57
- Top right dimension: 2X 47.14
- Bottom left dimension: 5.8 ± 0.15
- Bottom right dimension: 2X 28.2
- Bottom dimension: 2X 56.4
- Center hole: $\phi 38.1 \pm 0.03$
- Top center hole: $\phi 6.35 - 0.013$
- Top center hole: 0.075 A
- Top center hole: 0.05
- Callout 12 points to the top center hole.

TOLERANCES	THIRD ANGLE PROJECTION		 APPLIED MOTION PRODUCTS, INC.		
DECIMALS: MM (INCH) X.XXX= ± (.005) X.XX = ±0.13 (.010) X.X = ±0.25 (.020) ANGLES: MACH. = ±.5° CHAM. = ±.5°					
	APPROVALS	DATE	STEP MOTOR OUTLINE		
	DRAWN <i>R.BARRICK</i>	<i>12/12/02</i>			
	CHECKED		B	DWG NO. HT23-396	REV E
COMPUTER DATA BASE DRAWING	APPROVED		SCALE: NONE	SHEET 2 OF 2	

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru